



## RADIO TEST REPORT

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Bluetooth Speaker
Model No.	:	BANDBOX TRIO
FCC ID	:	APIJBLBBTRIO
IC	:	6132A-JBLBBTRIO
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 4 July 24, 2025, ANSI C63.10:2020, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE25042508-1E01
Issue Date	:	2025/10/10
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

## Table of Contents

1.	Summary of Test Results .....	7
2.	General Test Information.....	8
2.1.	Description of EUT .....	8
2.2.	Accessories of EUT .....	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode .....	9
2.5.	Deviations of test standard .....	10
2.6.	Test environment conditions .....	10
2.7.	Test laboratory .....	10
2.8.	Measurement uncertainty .....	11
3.	Equipment Used During Conductive Test .....	12
4.	20 dB Bandwidth .....	13
4.1.	Block diagram of test setup .....	13
4.2.	Limits .....	13
4.3.	Test procedure .....	13
4.4.	Test result.....	14
4.5.	Test graphs .....	15
5.	99% Bandwidth .....	18
5.1.	Block diagram of test setup .....	18
5.2.	Limits .....	18
5.3.	Test procedure .....	18
5.4.	Test result.....	19
5.5.	Test graphs .....	20
6.	Maximum Peak Output Power.....	23
6.1.	Block diagram of test setup .....	23
6.2.	Limits .....	23
6.3.	Test procedure .....	23
6.4.	Test result.....	24
6.5.	Test graphs .....	25
7.	Carrier Frequency Separation .....	28
7.1.	Block diagram of test setup .....	28
7.2.	Limits .....	28
7.3.	Test procedure .....	28
7.4.	Test result.....	29
7.5.	Test graphs .....	30
8.	Dwell Time.....	31

8.1.	Block diagram of test setup .....	31
8.2.	Limits .....	31
8.3.	Test procedure .....	31
8.4.	Test result.....	32
8.5.	Test graphs .....	33
9.	Number of Hopping Channel.....	39
9.1.	Block diagram of test setup .....	39
9.2.	Limits .....	39
9.3.	Test procedure .....	39
9.4.	Test result.....	40
9.5.	Test graphs .....	41
10.	Band Edge Compliance (Conducted Method) .....	42
10.1.	Block diagram of test setup .....	42
10.2.	Limit.....	42
10.3.	Test procedure .....	42
10.4.	Test result.....	43
10.5.	Test graphs .....	44
11.	RF Conducted Spurious Emissions.....	48
11.1.	Block diagram of test setup .....	48
11.2.	Limits .....	48
11.3.	Test procedure .....	48
11.4.	Test result.....	49
11.5.	Test graphs .....	50
12.	Duty cycle.....	59
12.1.	Block diagram of test setup .....	59
12.2.	Limit.....	59
12.3.	Test procedure .....	59
12.4.	Test result.....	60
12.5.	Test graphs .....	61
13.	Antenna Requirements.....	64
13.1.	Limit.....	64
13.2.	Result .....	64
14.	Radiated Emission .....	65
14.1.	Test equipment.....	65
14.2.	Block diagram of test setup .....	66
14.3.	Limits .....	67
14.4.	Assistant equipment used for test .....	69
14.5.	Test procedure .....	69

14.6.	Test result.....	70
14.7.	Test data .....	71
15.	Band Edge Compliance.....	81
15.1.	Test equipment.....	81
15.2.	Block diagram of test setup .....	82
15.3.	Limits .....	82
15.4.	Assistant equipment used for test .....	82
15.5.	Test procedure .....	82
15.6.	Test result.....	82
15.7.	Test data .....	83
16.	Power Line Conducted Emissions.....	95
16.1.	Test equipment.....	95
16.2.	Block diagram of test setup .....	95
16.3.	Limits .....	95
16.4.	Assistant equipment used for test .....	95
16.5.	Test procedure .....	95
16.6.	Test result.....	96
16.7.	Test data .....	97
17.	Test Setup Photograph .....	101
18.	Photos of the EUT .....	103



Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Bluetooth Speaker
Model No.	:	BANDBOX TRIO
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES




Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,  
RSS-247 Issue 4 July 24, 2025,  
ANSI C63.10:2020,  
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25042508-1E01		
Date of Receipt:	2025/06/09	Date of Test:	2025/06/09 - 2025/09/10

Created: Bobo Chen	Reviewed: Tiger Mo	Approved: Damon Hu
		
2025/09/10	2025/10/10	2025/10/10

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/10/10	Damon Hu

## 1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	47 CFR Part 15 15.247(b)(1), RSS-247 clause 6.2.3.2(a)	/	Pass
2	20 dB Bandwidth	47 CFR Part 15 15.247(a)(1), RSS-247 clause 6.2.3.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen clause 6.7	/	Pass
4	Carrier Frequency Separation	47 CFR Part 15 15.247(a)(1), RSS-247 clause 6.2.3.1(a)	/	Pass
5	Number of Hopping Channel	47 CFR Part 15 15.247(a)(1)(iii), RSS-247 clause 6.2.3.1(b)	/	Pass
6	Dwell Time	47 CFR Part 15 15.247(a)(1)(iii), RSS-247 clause 6.2.3.1(b)	/	Pass
7	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d), RSS-247 clause 6.6	/	Pass
8	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
9	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
10	Antenna Requirement	47 CFR Part 15 15.203, RSS-Gen clause 6.8	/	Pass
11	Power Line Conducted Emissions	47 CFR Part 15 15.207(a), RSS-Gen clause 8.8	/	Pass

Note 1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: The product offers two optional battery models (Model FG4CELL21201 and Model FG4CELL21700GP). Model FG4CELL21700GP is designated as the primary test subject, while battery model FG4CELL21201 based on engineering judgment that only Radiated Emission (below 1 GHz) and Power Line Conducted Emissions need to test.

## 2. General Test Information

### 2.1. Description of EUT

EUT Name	: Bluetooth Speaker
Model Number	: BANDBOX TRIO
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC Input: AC 100-240V ~ 50/60Hz, 100W : DC Input: DC 5V/12V/15V/20V ---3.0A from external AC Adapter Internal battery: DC 7.2V 9444mAh Polymer Li-ion built-in battery
Antenna Type	: FPC
Max Antenna Gain(dBi)	: 1.93

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK

Bluetooth BR/EDR Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477

22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	
26	2428	53	2455	/	

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☒” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

## 2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description	Remark
AC cable	Harman	N/A	Length: 2.0 m	/
Rechargeable Li-ion Battery Pack	Guangdong Pow-Tech New Power Co.,Ltd.	FG4CELL21201	Rated Capacity: 9444mAh Nominal Energy: 68 Wh Nominal Voltage: 7.2 V	Optional
Rechargeable Li-ion Battery Pack	GREAT POWER BATTERY CO., LTD	FG4CELL21700GP	Rated Capacity: 9444mAh Nominal Energy: 68 Wh Nominal Voltage: 7.2 V	Optional

## 2.3. Block diagram of EUT configuration for test



## 2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: FCC\_Tool\_V3.01.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Tested mode	Tx Power Setting	Channel	Frequency (MHz)
GFSK hopping on Tx mode	9	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	9	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	9	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	9	CH0	2402
	9	CH39	2441
	9	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	9	CH0	2402
	9	CH39	2441
	9	CH78	2480
8DPSK hopping off Tx mode	9	CH0	2402
	9	CH39	2441
	9	CH78	2480

Note: According exploratory test, EUT will have maximum output power in those data rate, worst-case data rates were: GFSK mode: DH5,  $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

## 2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com).

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118



## 2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); 1.38 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); 1.38 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )
Frequencies Stability	$6.7 \times 10^{-8}$ (Antenna couple method) $5.5 \times 10^{-8}$ (Conducted method)
Conducted spurious emissions	0.86 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); 1.40 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ ) 1.66 dB ( $8 \text{ GHz} \leq f < 26.5 \text{ GHz}$ )
Uncertainty for radio frequency (RBW < 20 kHz)	$3 \times 10^{-8}$
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	




3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	168801	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2026/03/28
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25
RF Control Unit	Tonscend	JS0806-2	2118060485	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

## 4. 20 dB Bandwidth

### 4.1. Block diagram of test setup

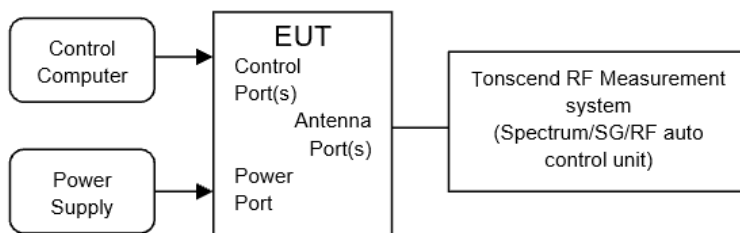

### 4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Measure and record the results in the report.


4.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.3℃,43.1%RH	Test Date:	2025.07.02
Test Power Supply:	Battery	Sample Number:	S25042508-021

Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	0.96
		2441	0.97
		2480	0.95
2DH5	Ant1	2402	1.28
		2441	1.28
		2480	1.28
3DH5	Ant1	2402	1.26
		2441	1.26
		2480	1.26

4.5. Test graphs



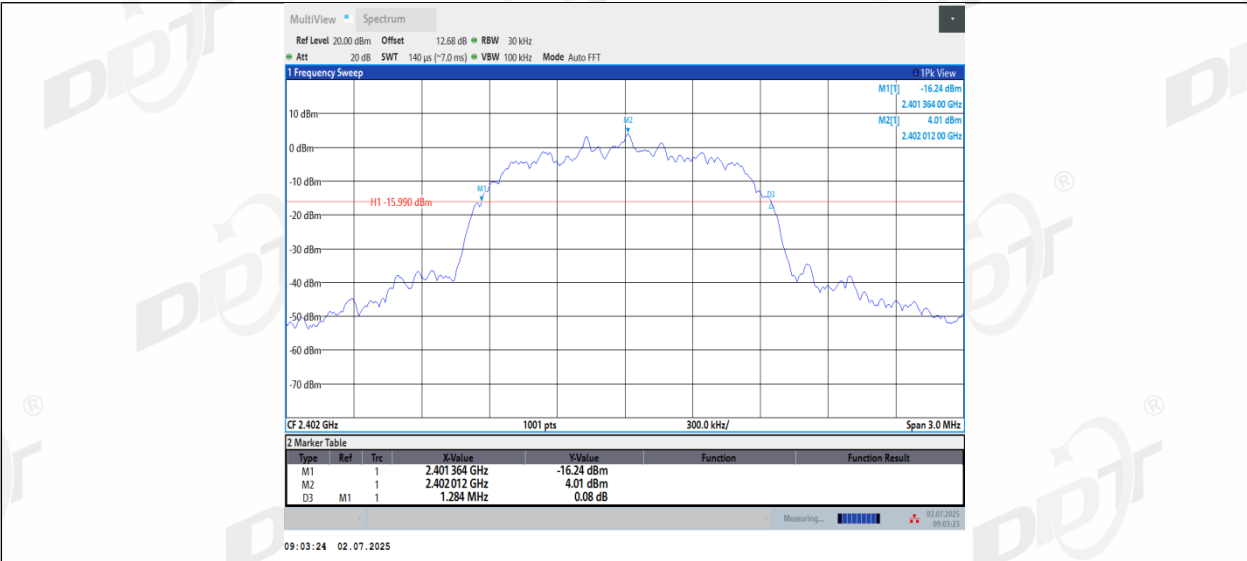

2DH5\_Ant1\_2441



2DH5\_Ant1\_2480




3DH5\_Ant1\_2402



## 5. 99% Bandwidth

### 5.1. Block diagram of test setup

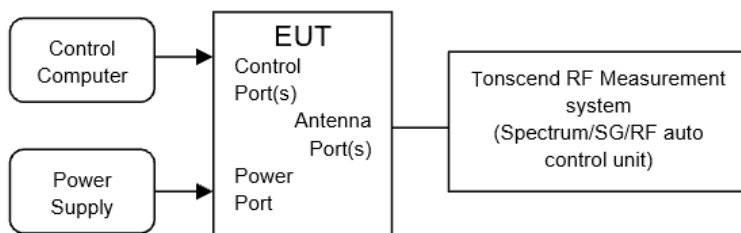

### 5.2. Limits

Just for Report.

### 5.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.




5.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#		
Ambient Condition:	24.3℃,43.1%RH	Test Date:	2025.07.02		
Test Power Supply:	Battery	Sample Number:	S25042508-021		


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.88771	2401.5515	2402.4392
		2441	0.87401	2440.5558	2441.4298
		2480	0.86807	2479.5586	2480.4267
2DH5	Ant1	2402	1.1723	2401.4061	2402.5784
		2441	1.1600	2440.4110	2441.5710
		2480	1.1838	2479.4015	2480.5852
3DH5	Ant1	2402	1.1608	2401.4155	2402.5763
		2441	1.1640	2440.4145	2441.5785
		2480	1.1552	2479.4177	2480.5730

5.5. Test graphs




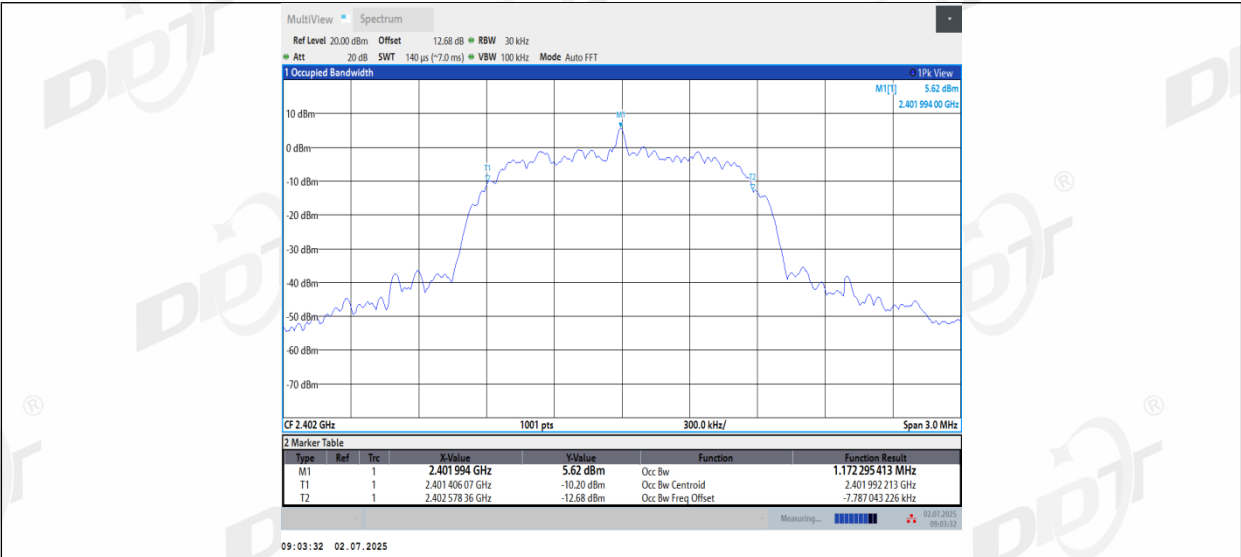

2DH5\_Ant1\_2441

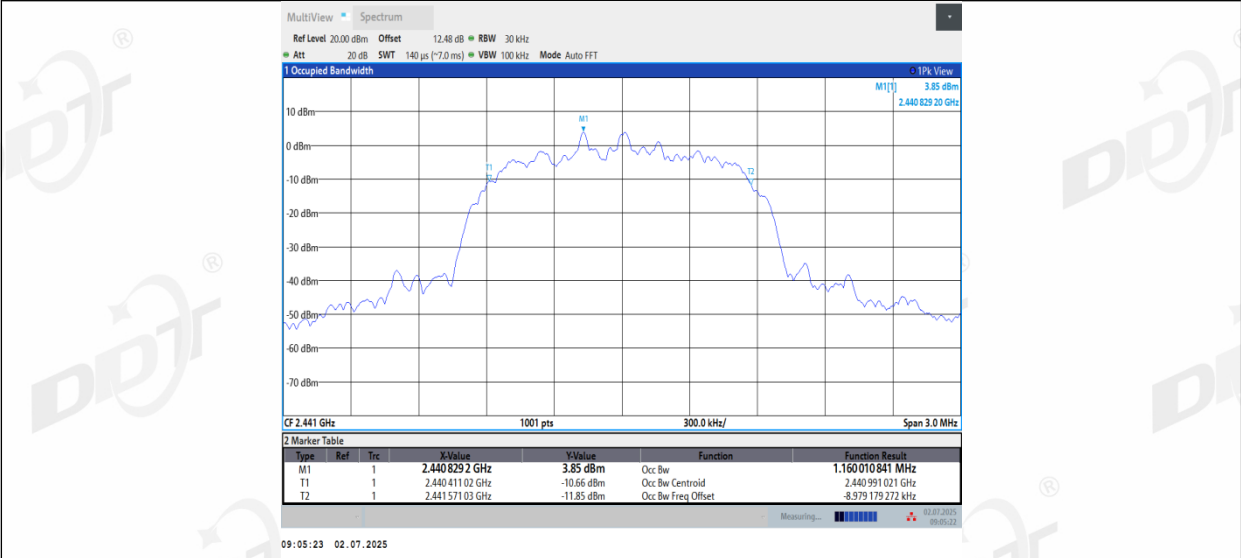

2DH5\_Ant1\_2480

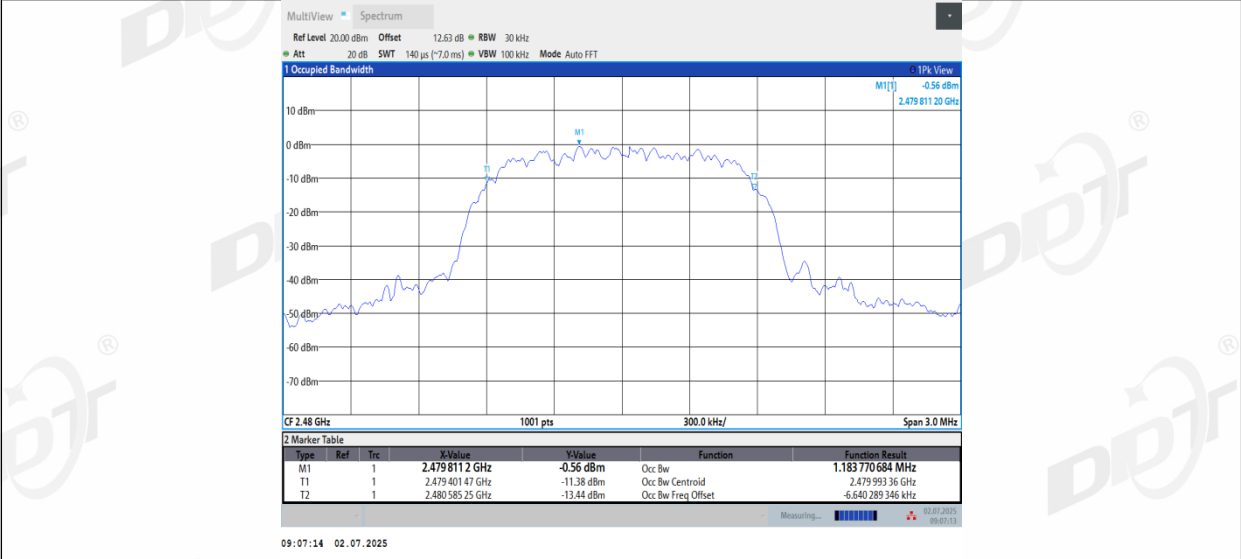


3DH5\_Ant1\_2402



## 6. Maximum Peak Output Power

### 6.1. Block diagram of test setup

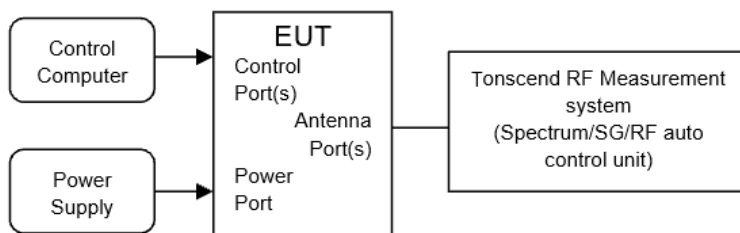

### 6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

### 6.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW $\geq$ RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

6.4. Test result


Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.6 °C,43.3 %RH	Test Date:	2025.09.02
Test Power Supply:	Battery	Sample Number:	S25042508-021

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	7.81	≤20.97	9.74	≤36	PASS
		2441	7.51	≤20.97	9.44	≤36	PASS
		2480	7.33	≤20.97	9.26	≤36	PASS
2DH5	Ant1	2402	7.80	≤20.97	9.73	≤36	PASS
		2441	7.51	≤20.97	9.44	≤36	PASS
		2480	7.34	≤20.97	9.27	≤36	PASS
3DH5	Ant1	2402	7.83	≤20.97	9.76	≤36	PASS
		2441	7.52	≤20.97	9.45	≤36	PASS
		2480	7.34	≤20.97	9.27	≤36	PASS

6.5. Test graphs

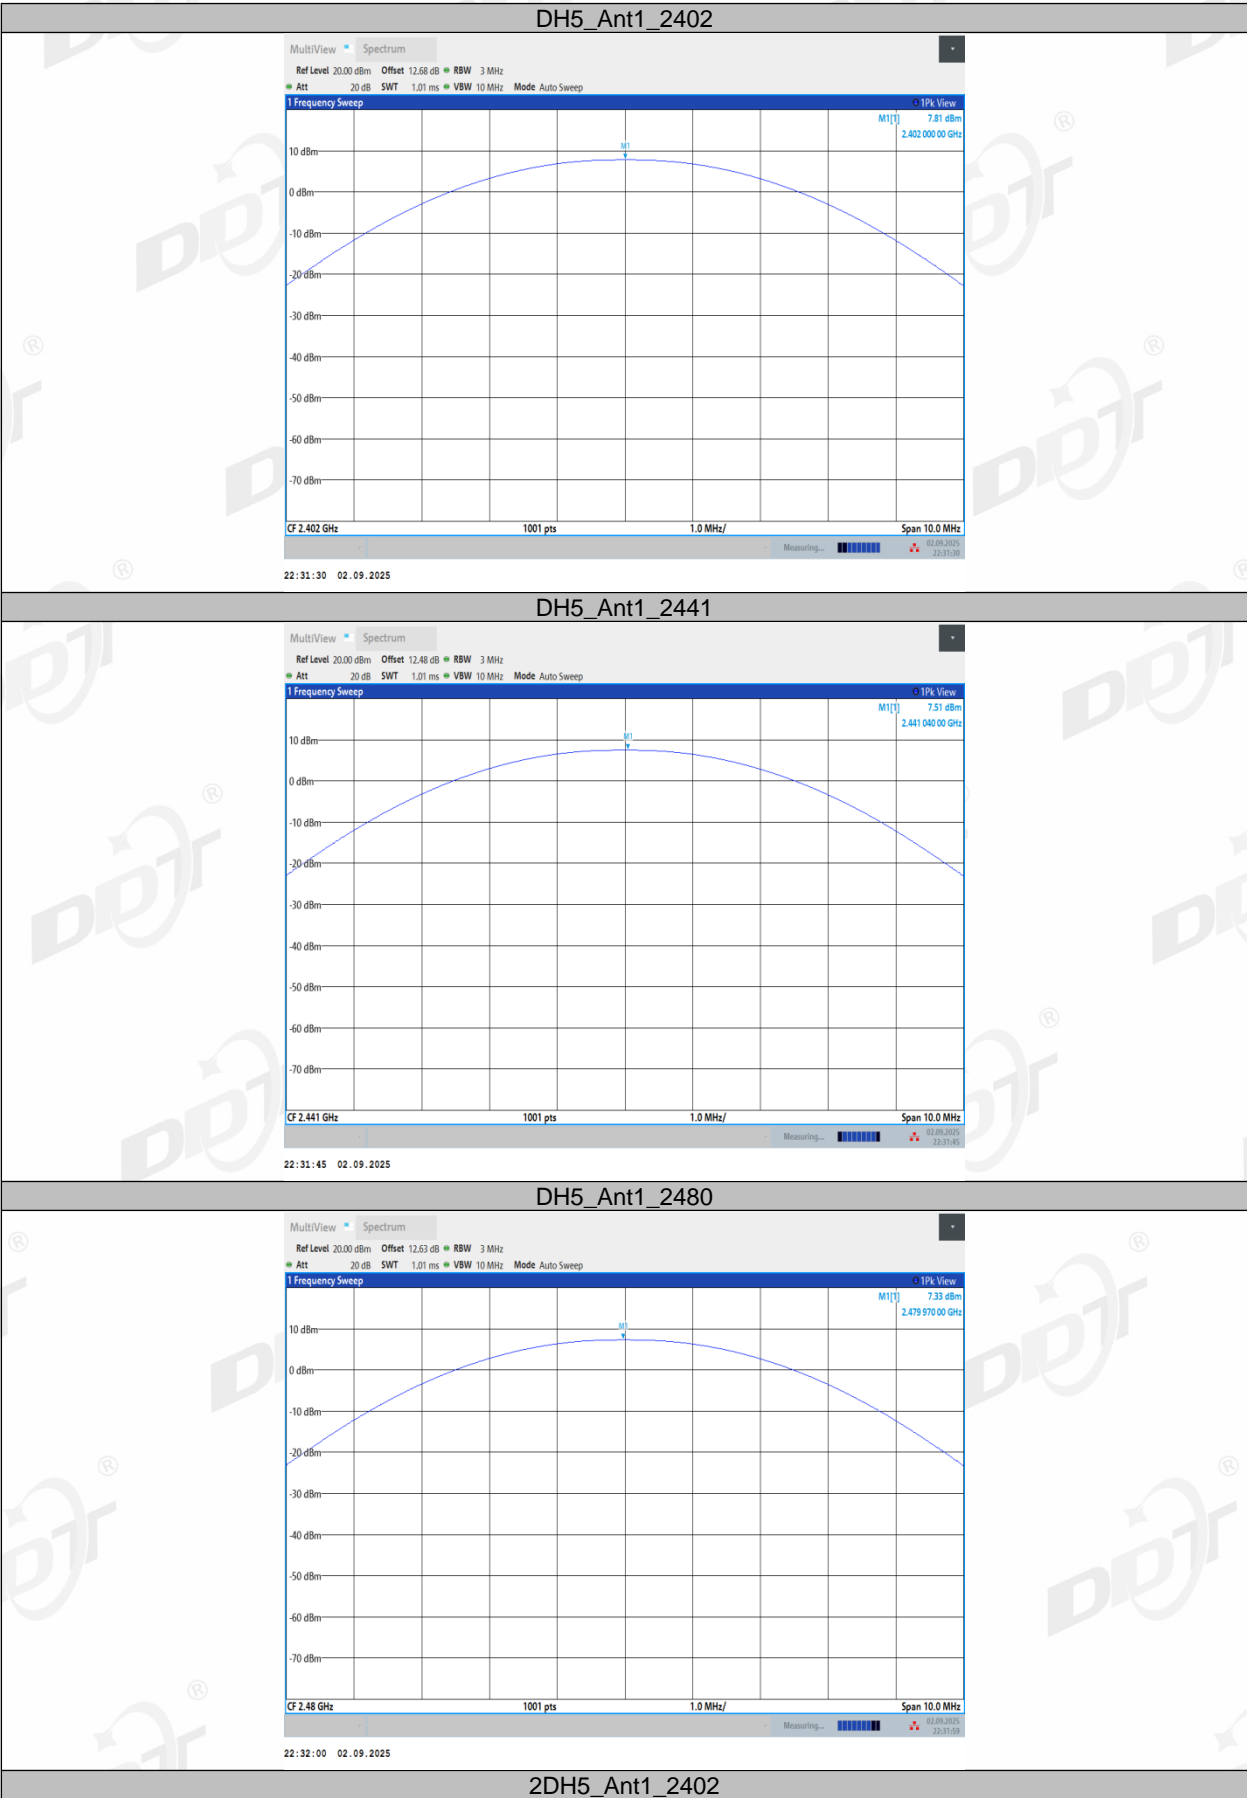




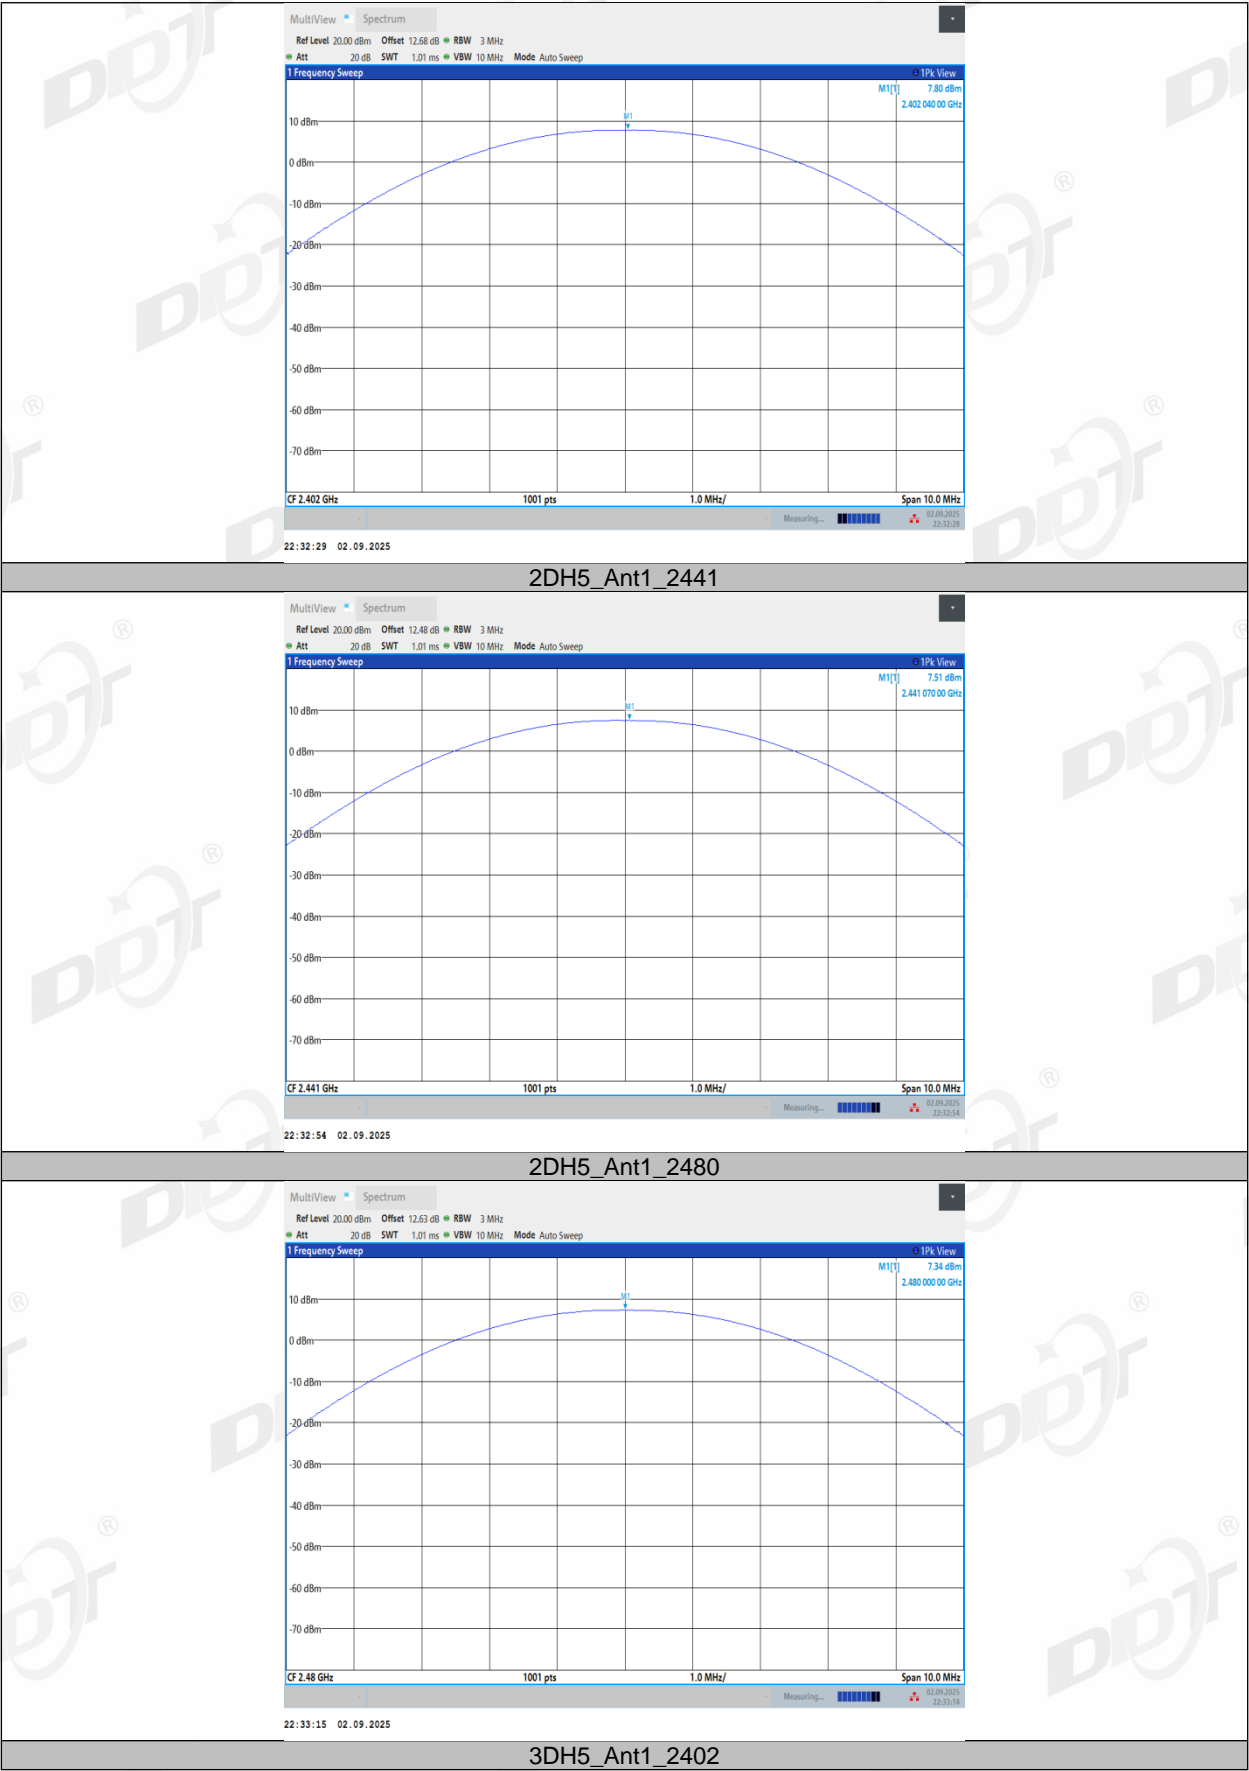



## 7. Carrier Frequency Separation

### 7.1. Block diagram of test setup

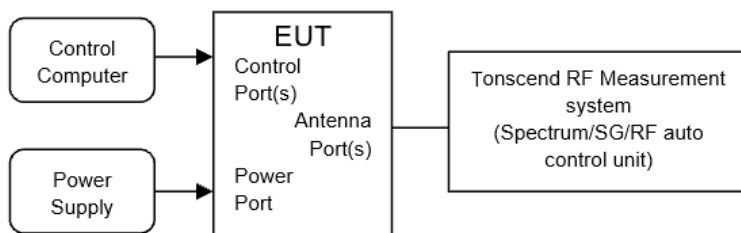

### 7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$ .
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.3℃,43.1%RH	Test Date:	2025.07.02
Test Power Supply:	Battery	Sample Number:	S25042508-021


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.010	≥0.646	PASS
2DH5	Ant1	Hop	1.008	≥0.853	PASS
3DH5	Ant1	Hop	0.996	≥0.840	PASS

7.5. Test graphs

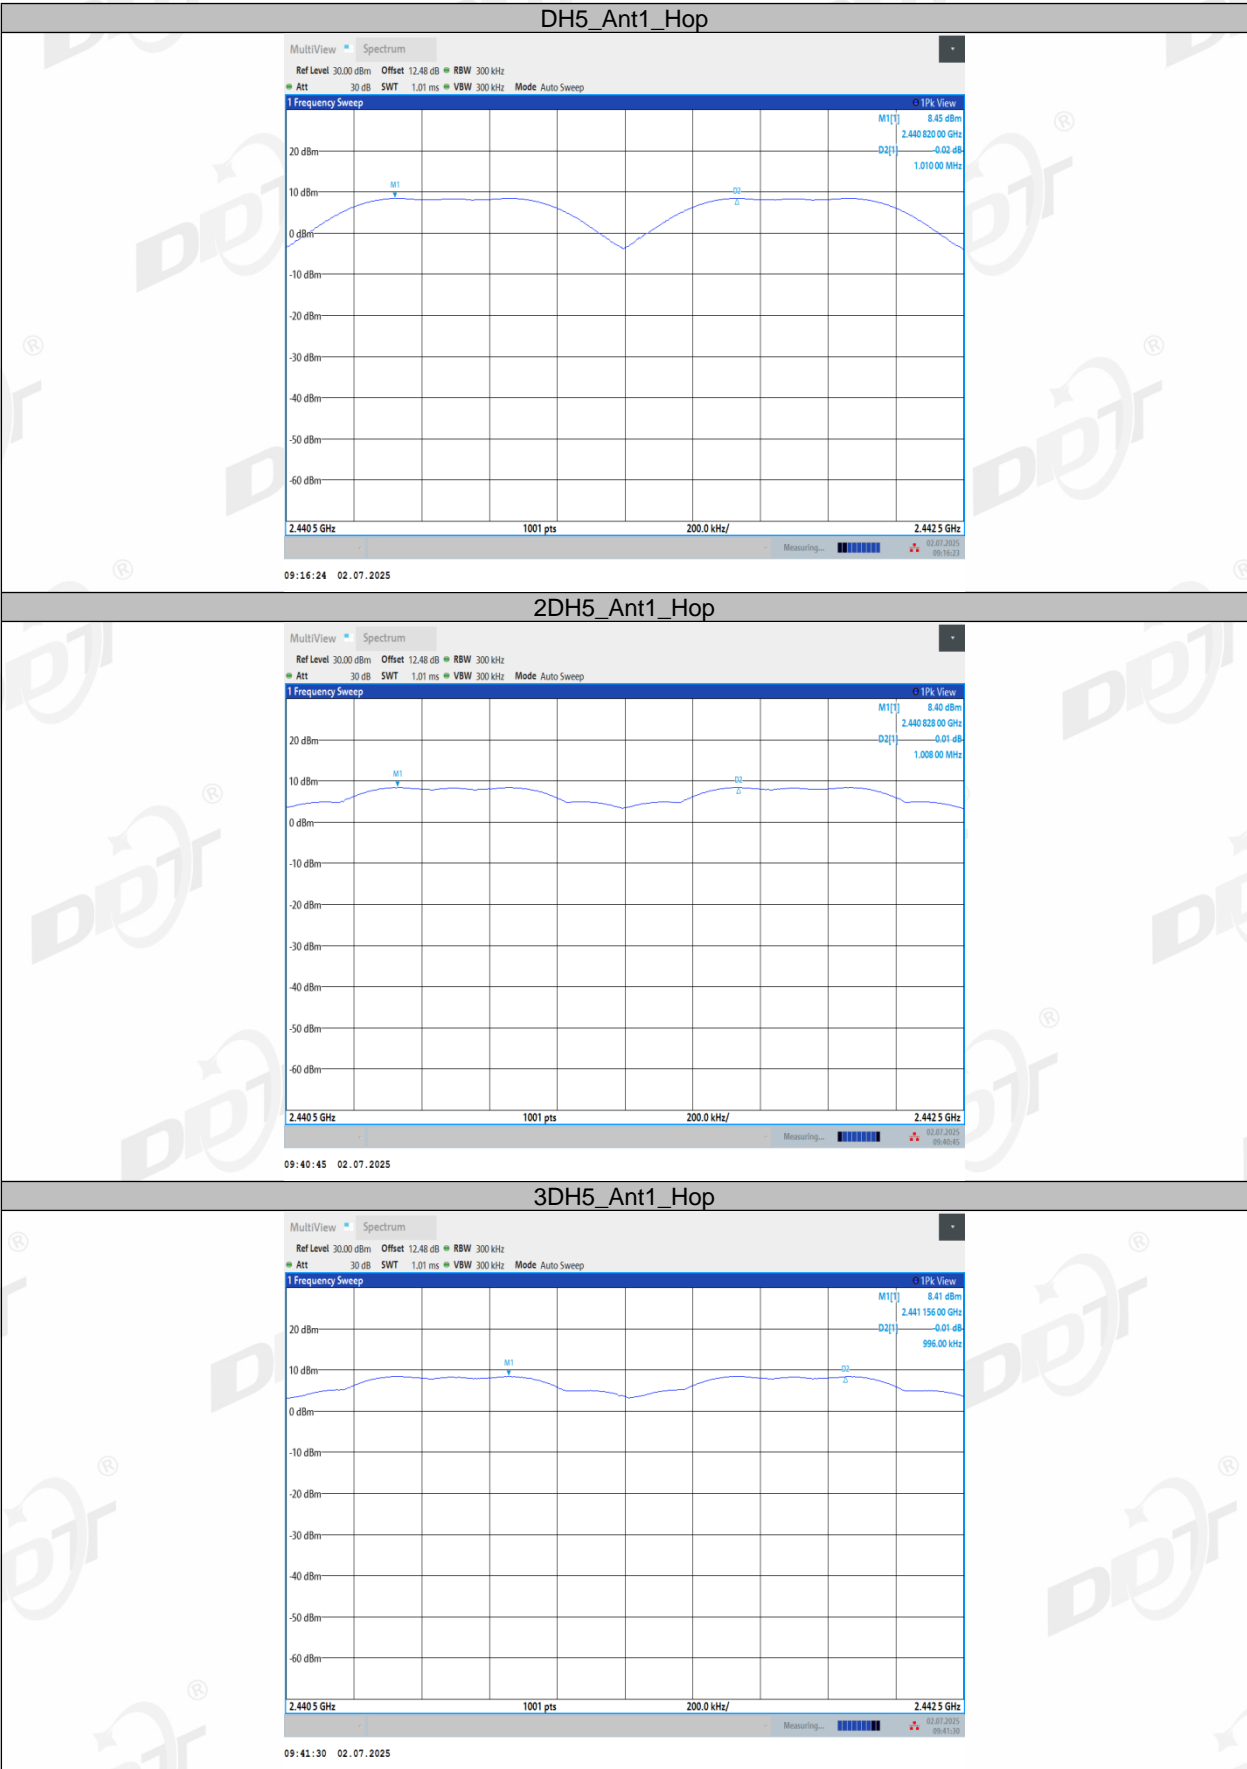

## 8. Dwell Time

### 8.1. Block diagram of test setup

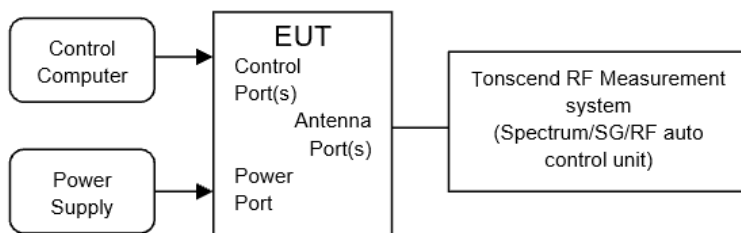

### 8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 8.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 

RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$ .
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops \* pulse's on time.
- (7) Measure and record the results in the report.


#### 8.4. Test result


Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.3℃,43.1%RH	Test Date:	2025.07.02
Test Power Supply:	Battery	Sample Number:	S25042508-021


Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.360	320	0.115	≤0.4	PASS
DH3	Ant1	Hop	1.600	160	0.256	≤0.4	PASS
DH5	Ant1	Hop	2.850	107	0.305	≤0.4	PASS
2DH1	Ant1	Hop	0.360	320	0.115	≤0.4	PASS
2DH3	Ant1	Hop	1.620	159	0.258	≤0.4	PASS
2DH5	Ant1	Hop	2.860	107	0.306	≤0.4	PASS
3DH1	Ant1	Hop	0.360	320	0.115	≤0.4	PASS
3DH3	Ant1	Hop	1.620	159	0.258	≤0.4	PASS
3DH5	Ant1	Hop	2.870	107	0.307	≤0.4	PASS





8.5. Test graphs

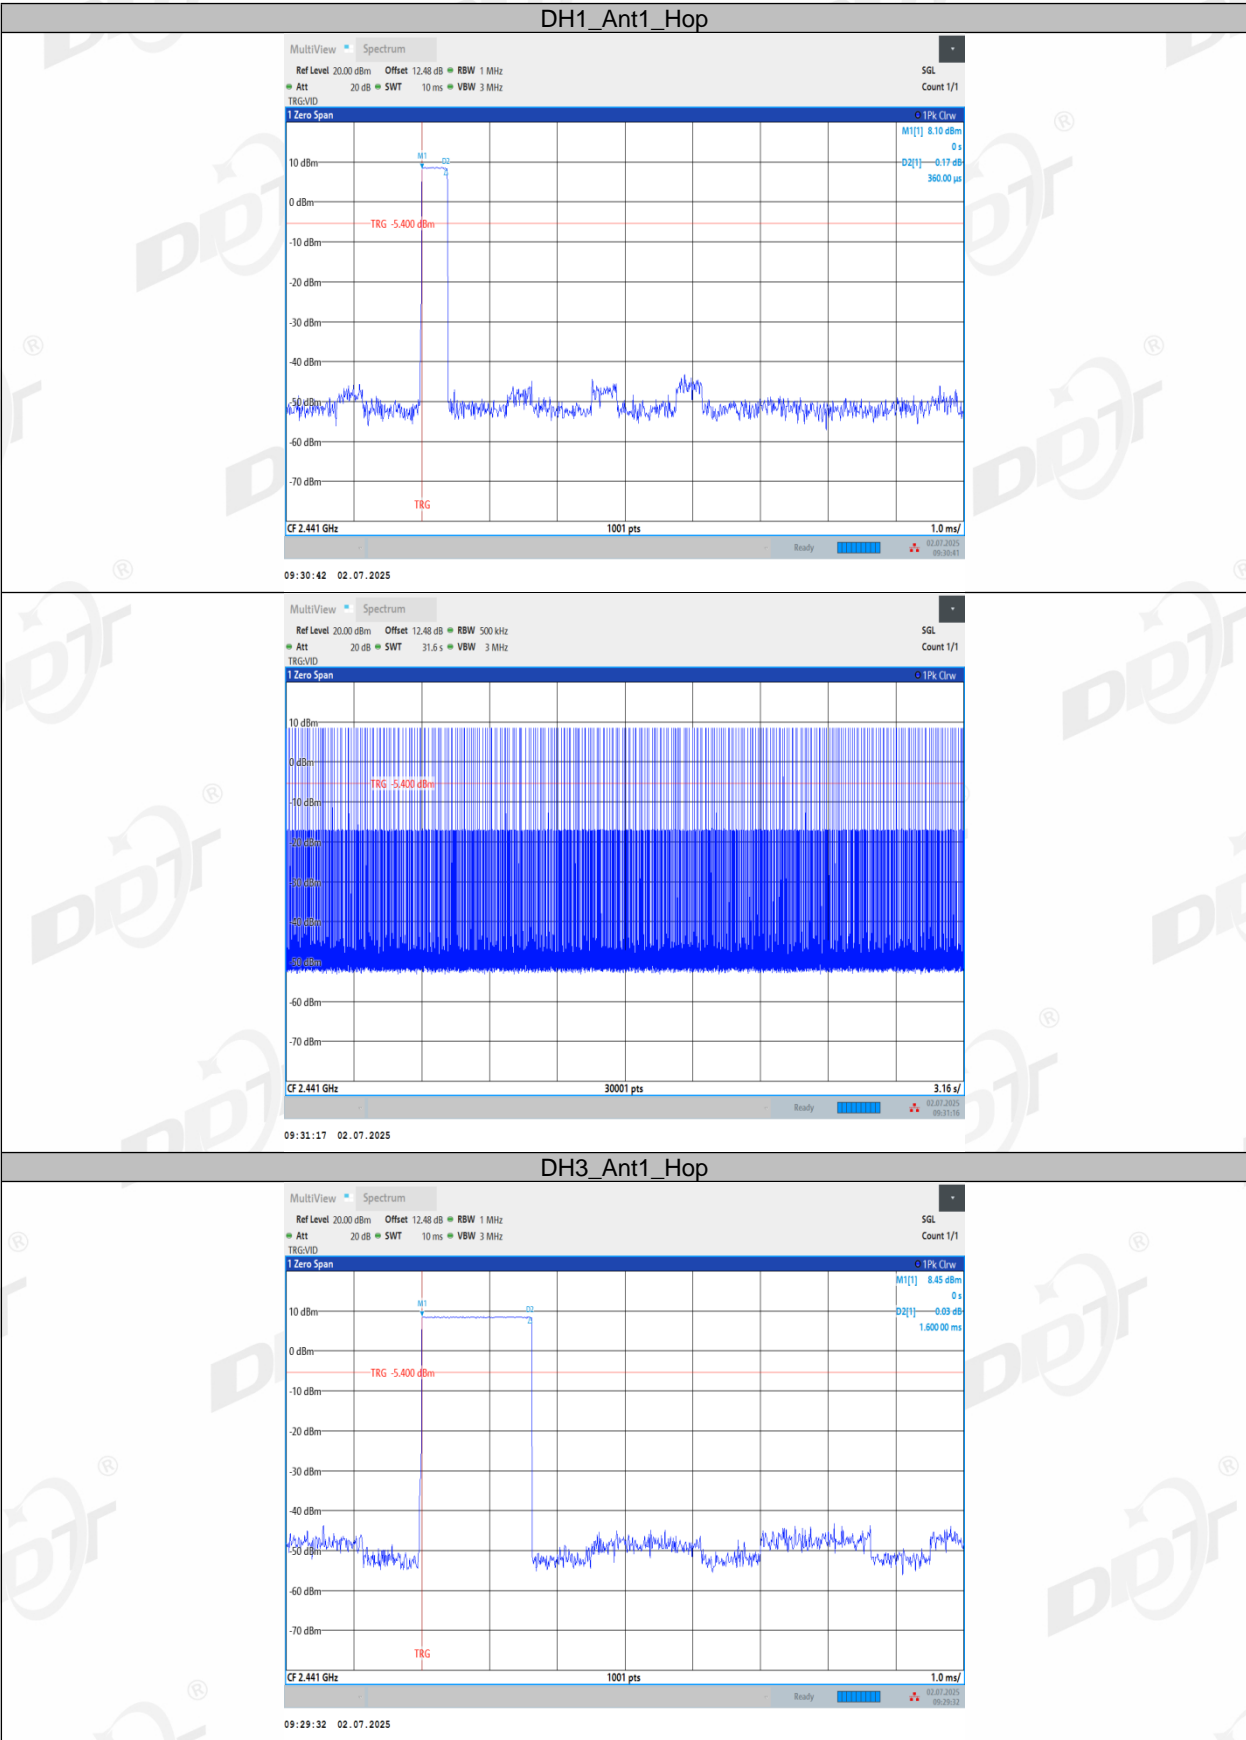


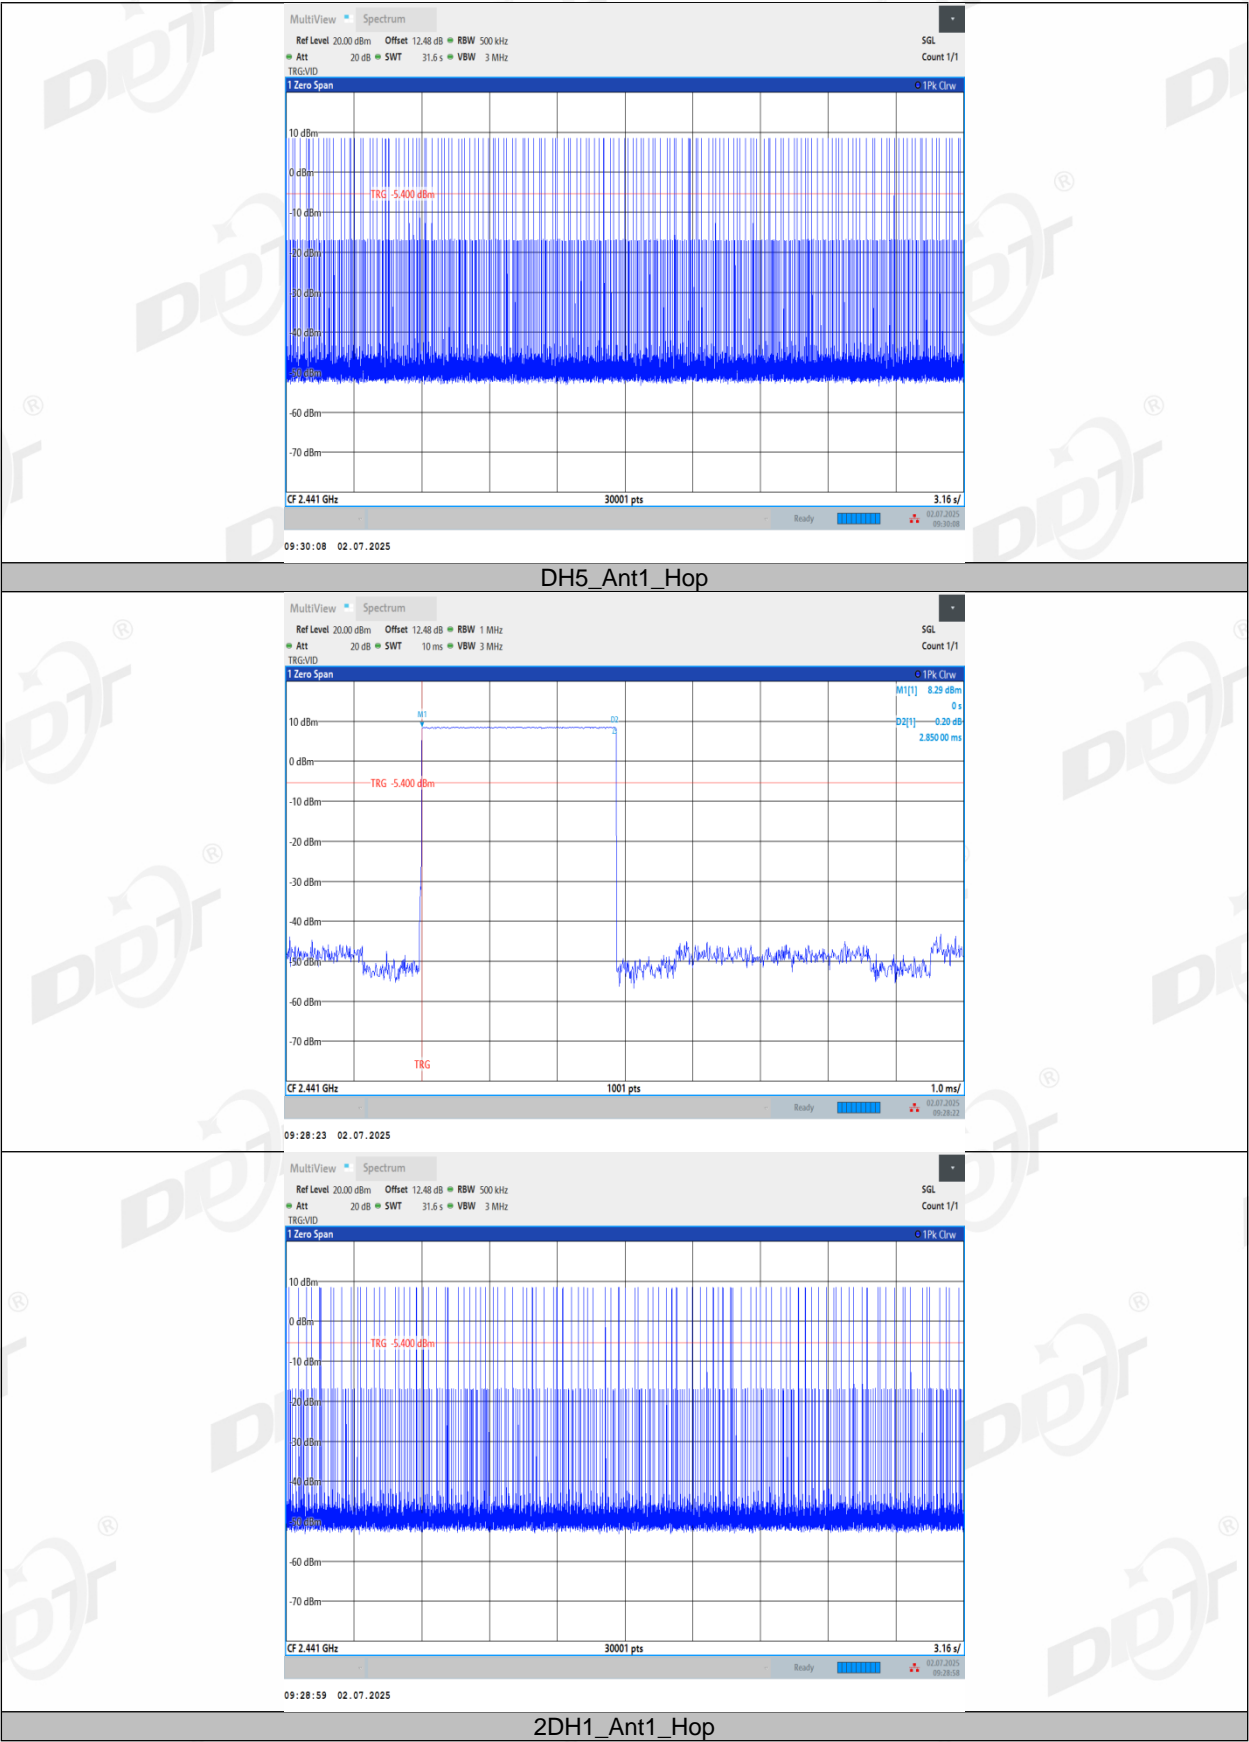

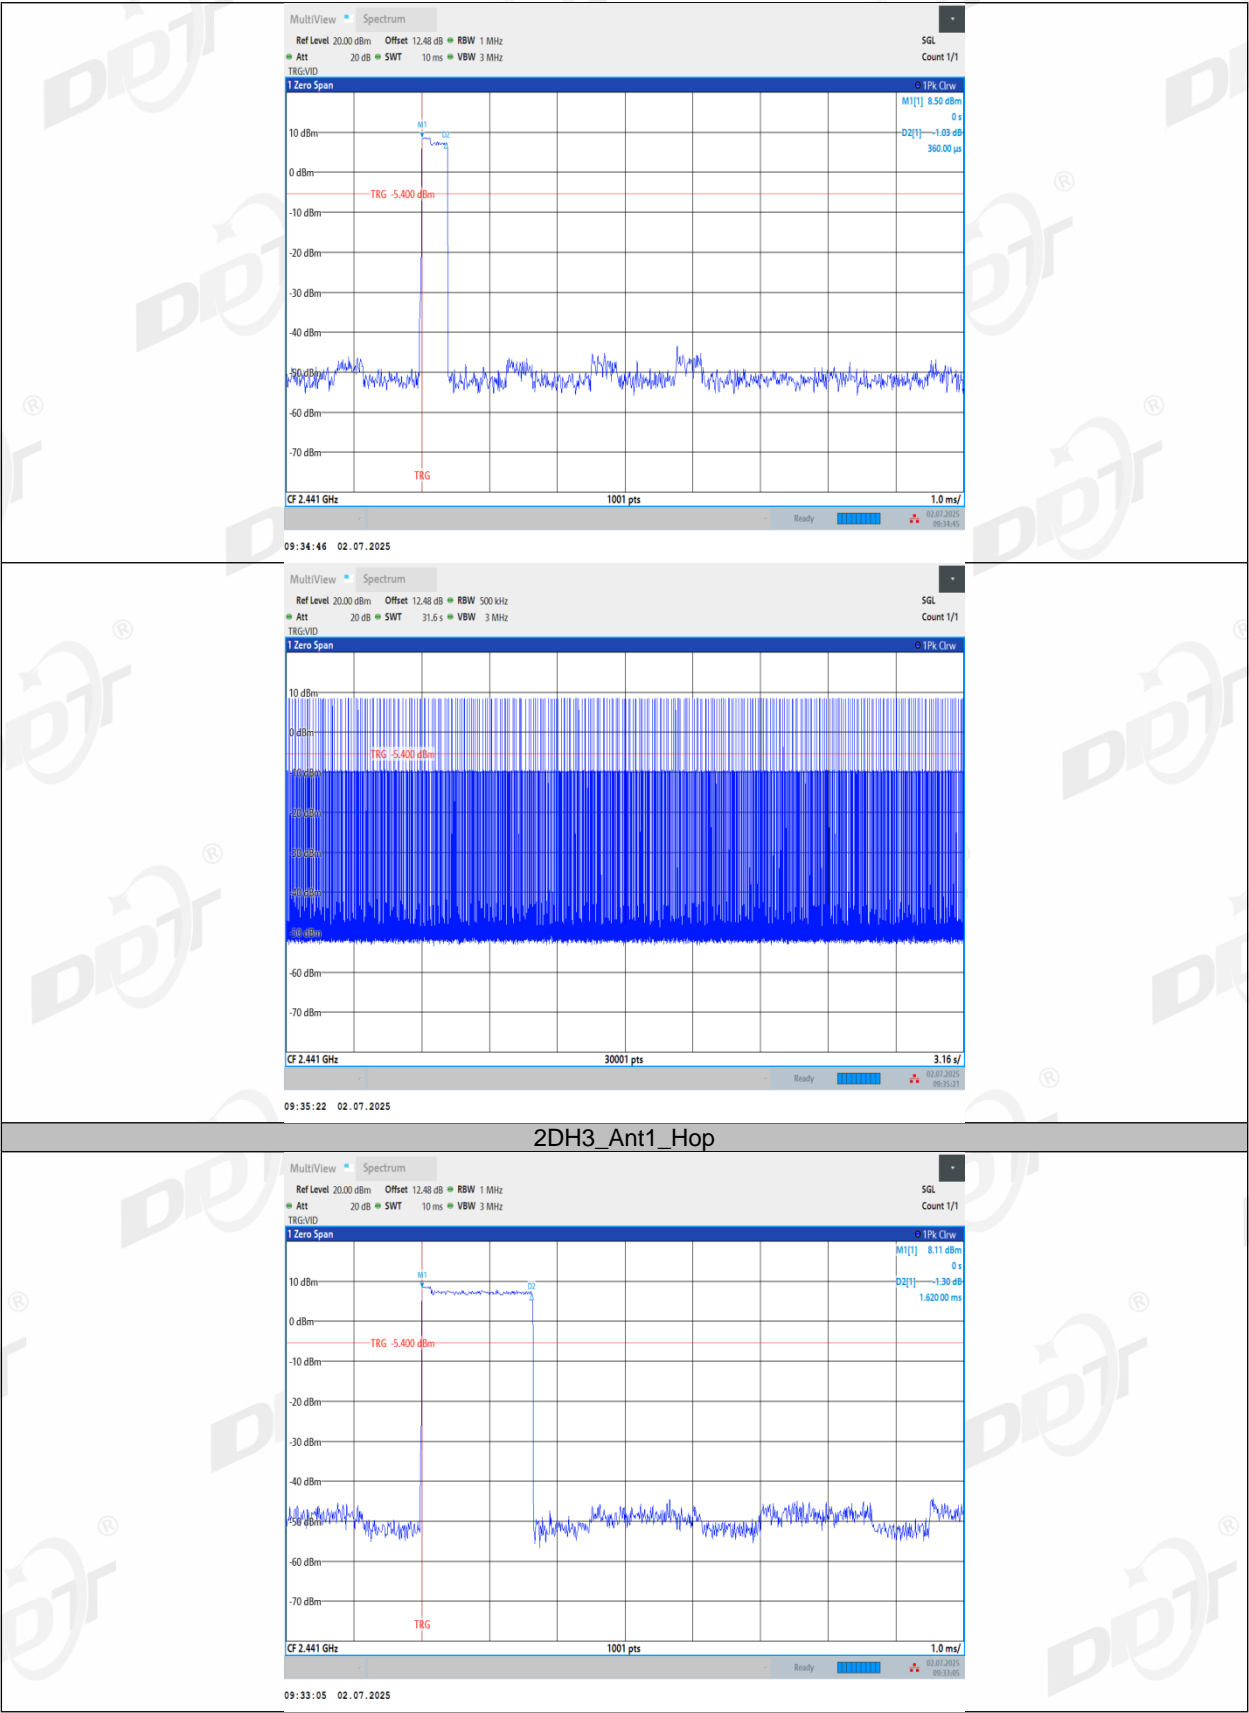

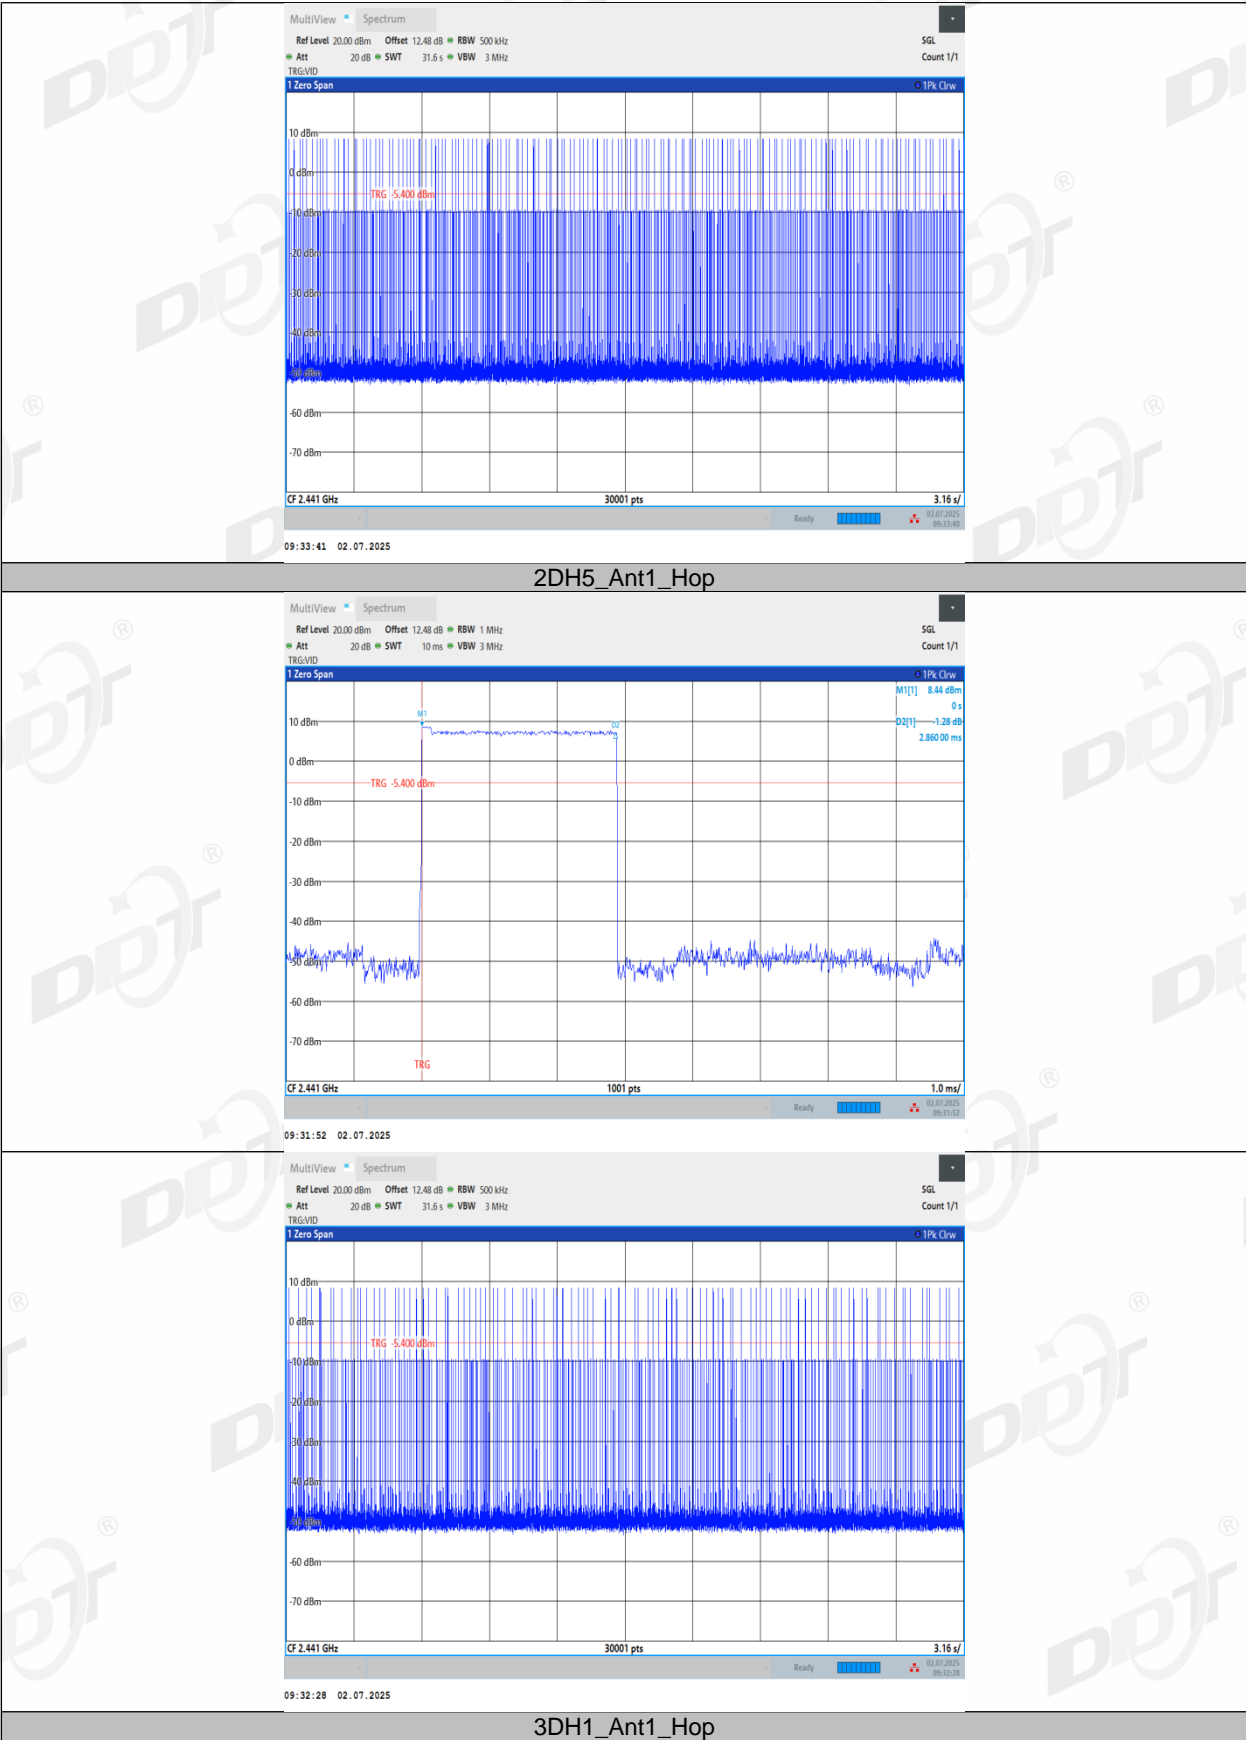


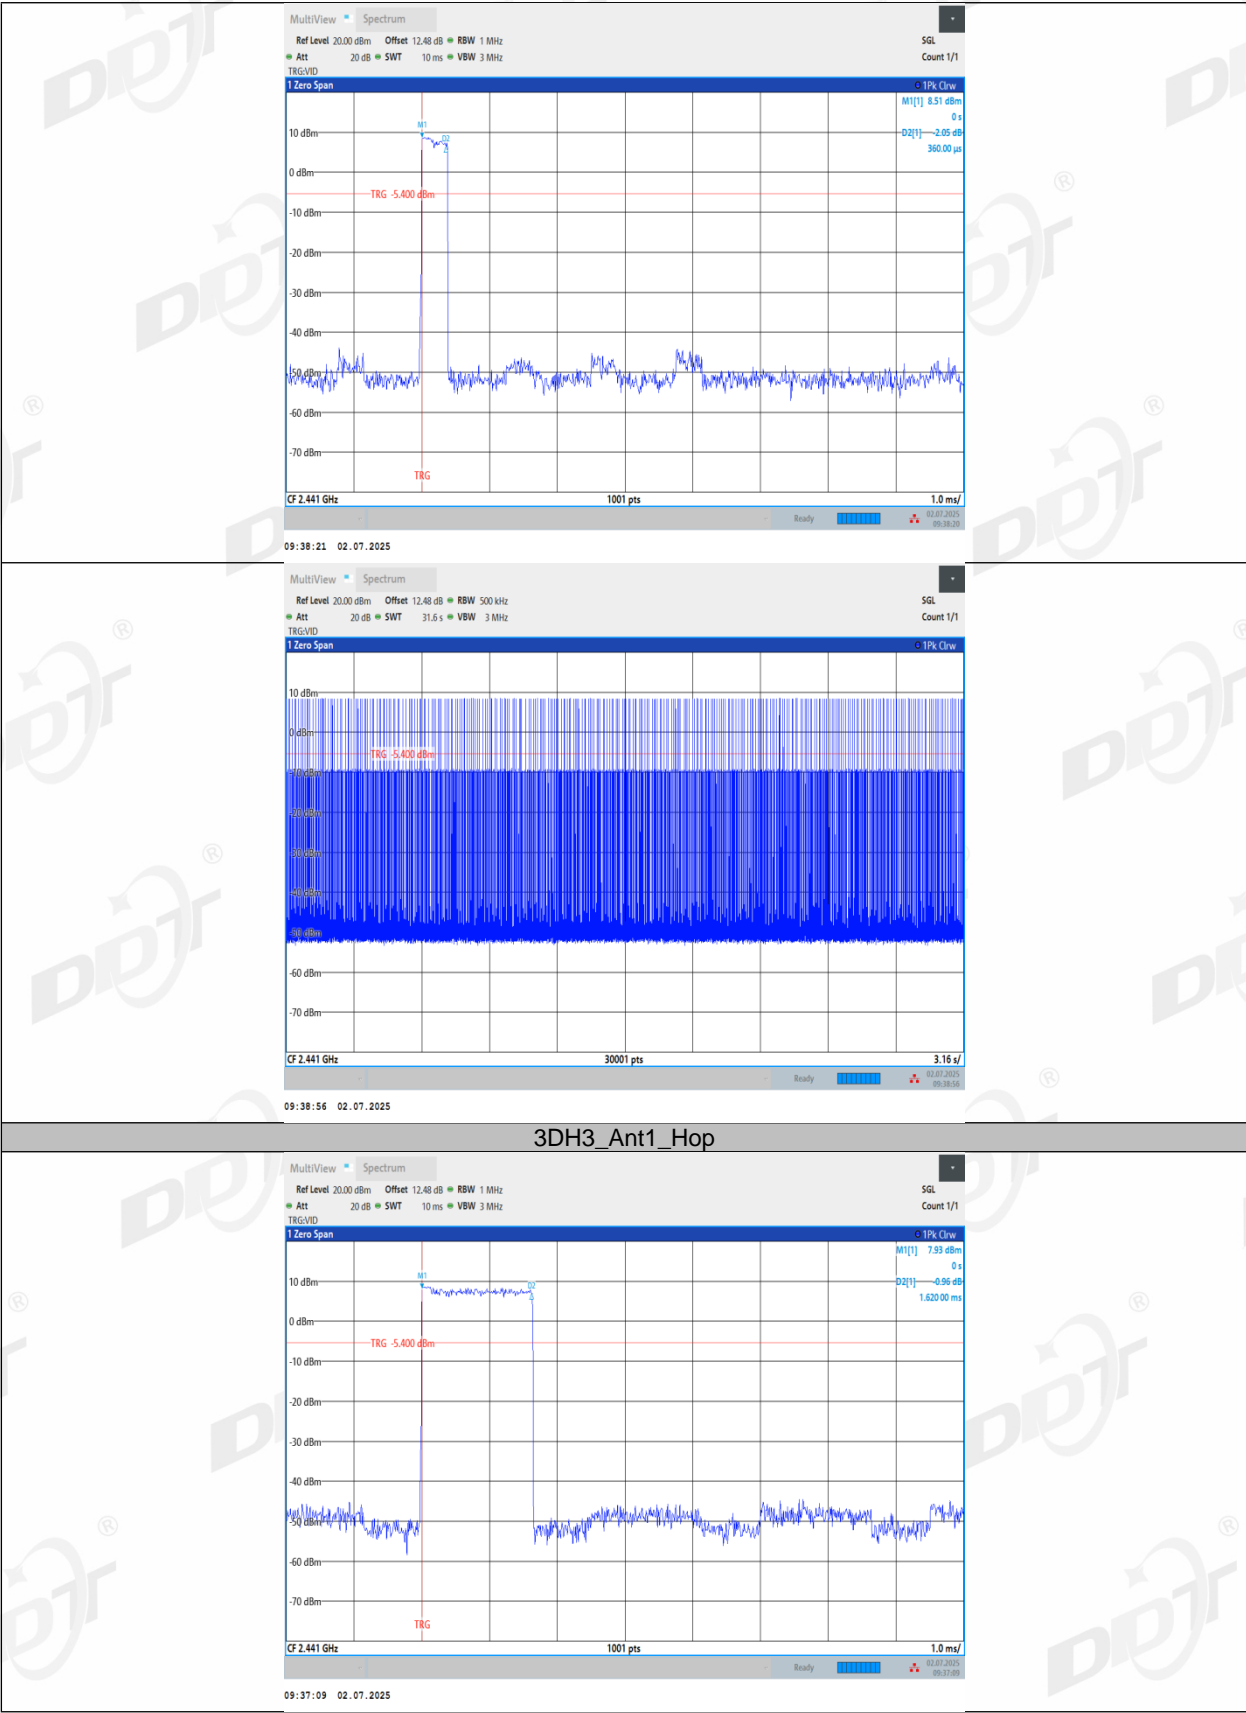

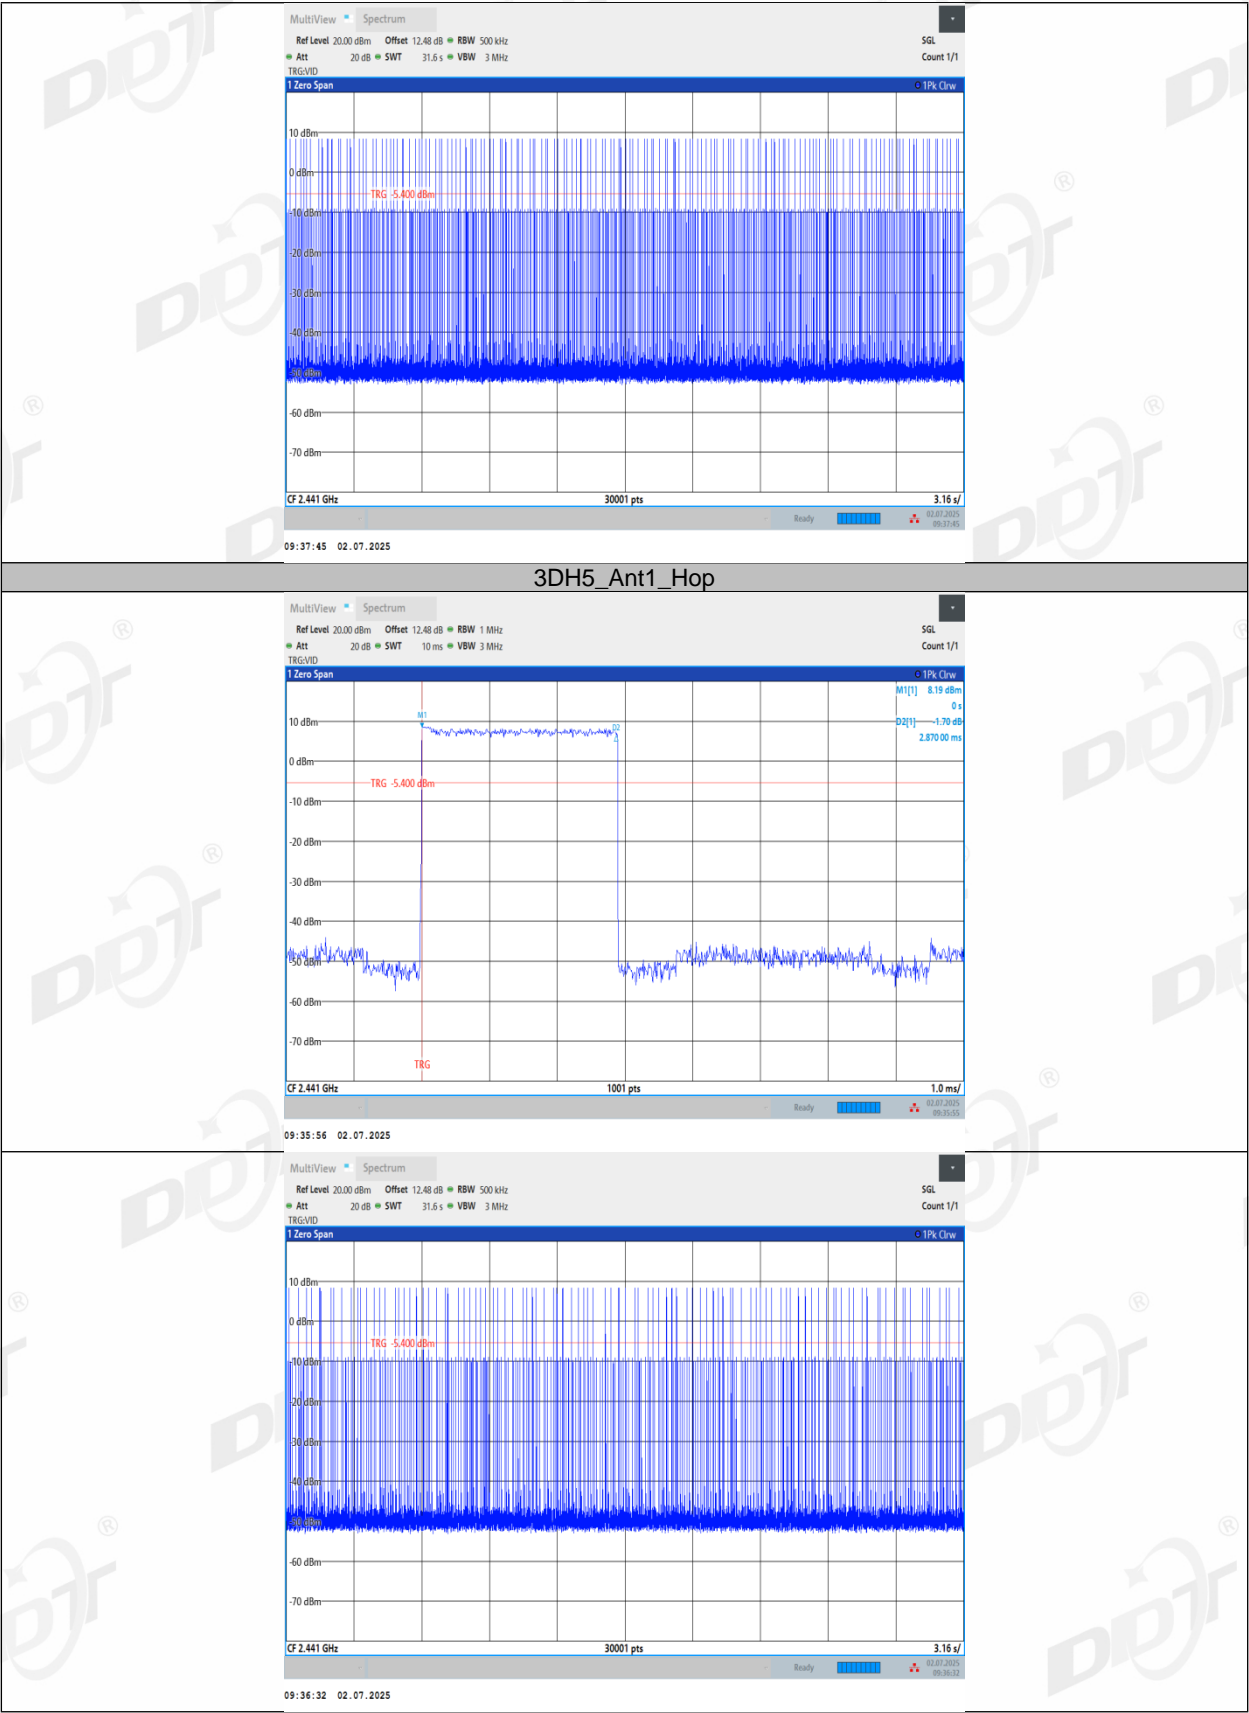

## 9. Number of Hopping Channel

### 9.1. Block diagram of test setup

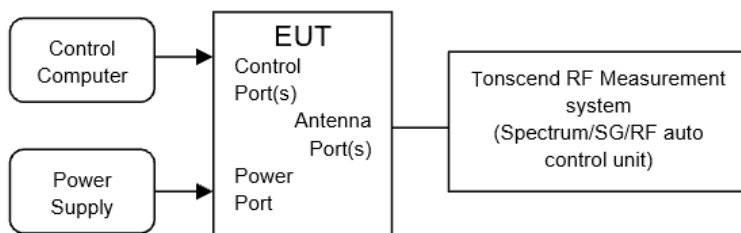

### 9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 9.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW $\geq$ RBW.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.




9.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.3℃,43.1%RH	Test Date:	2025.07.02-2025.07.02
Test Power Supply:	Battery	Sample Number:	S25042508-021


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

9.5. Test graphs

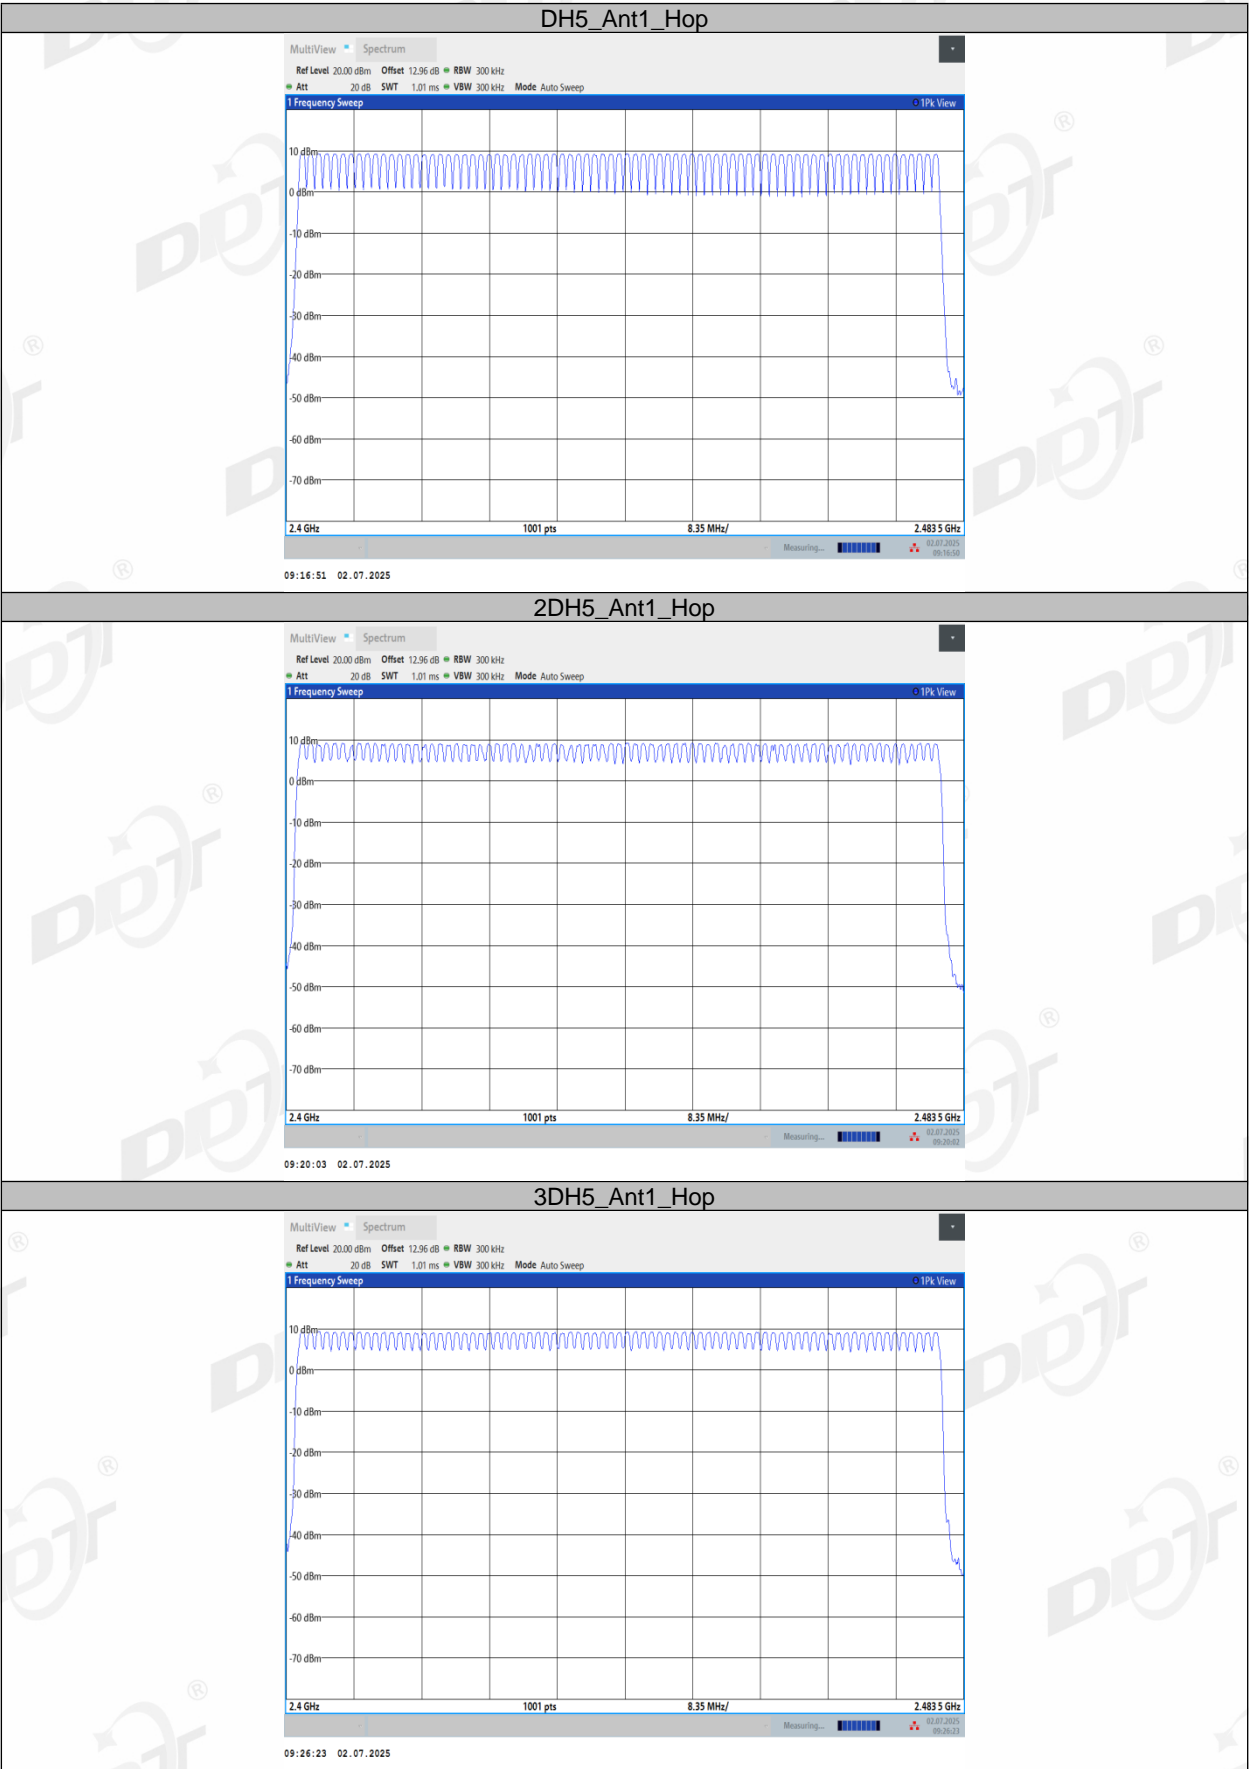

## 10. Band Edge Compliance (Conducted Method)

### 10.1. Block diagram of test setup

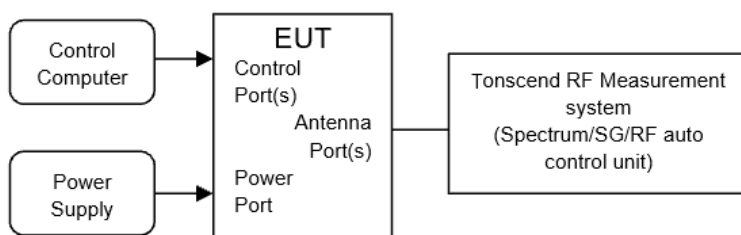

### 10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

### 10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result


Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.6 °C, 43.3 %RH	Test Date:	2025.09.03
Test Power Supply:	Battery	Sample Number:	S25042508-021

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass


10.5. Test graphs

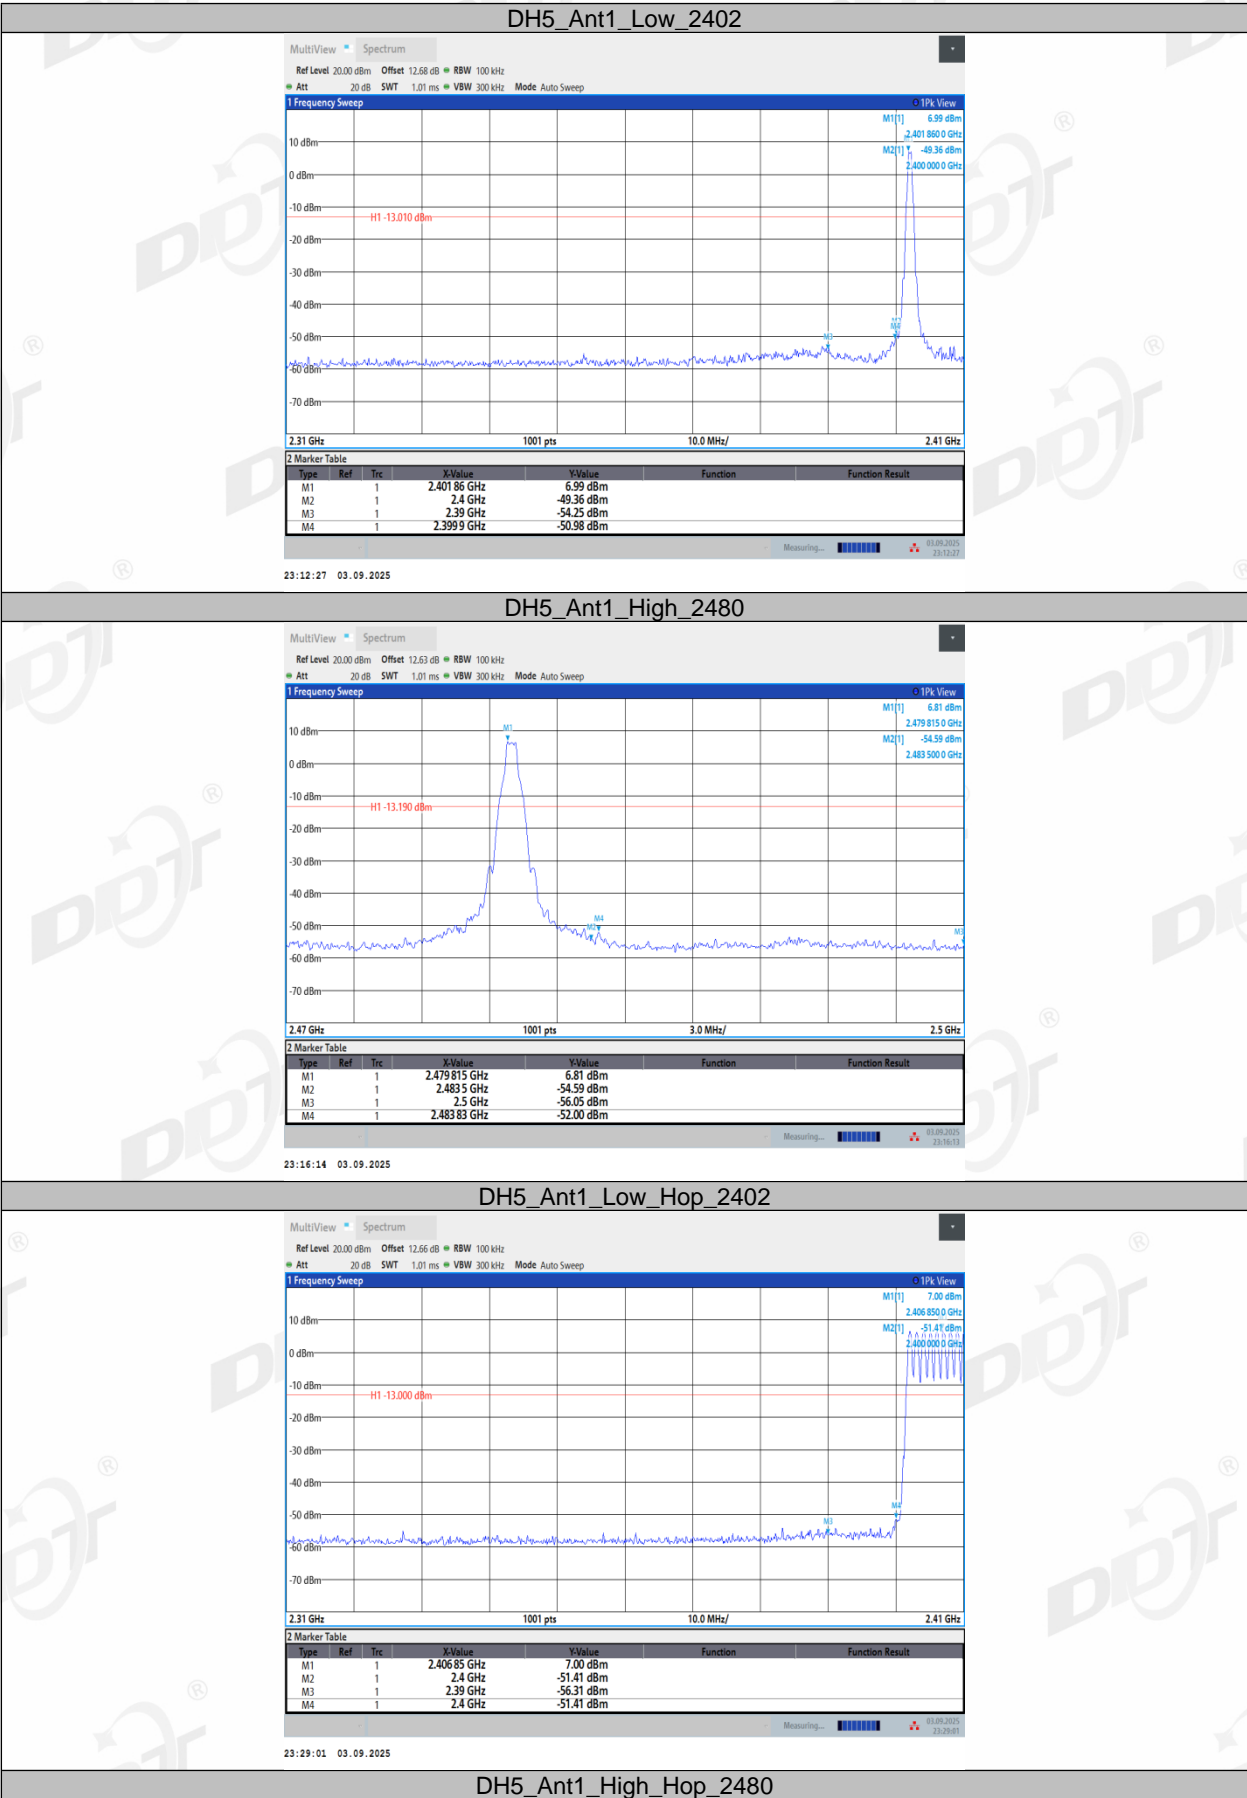

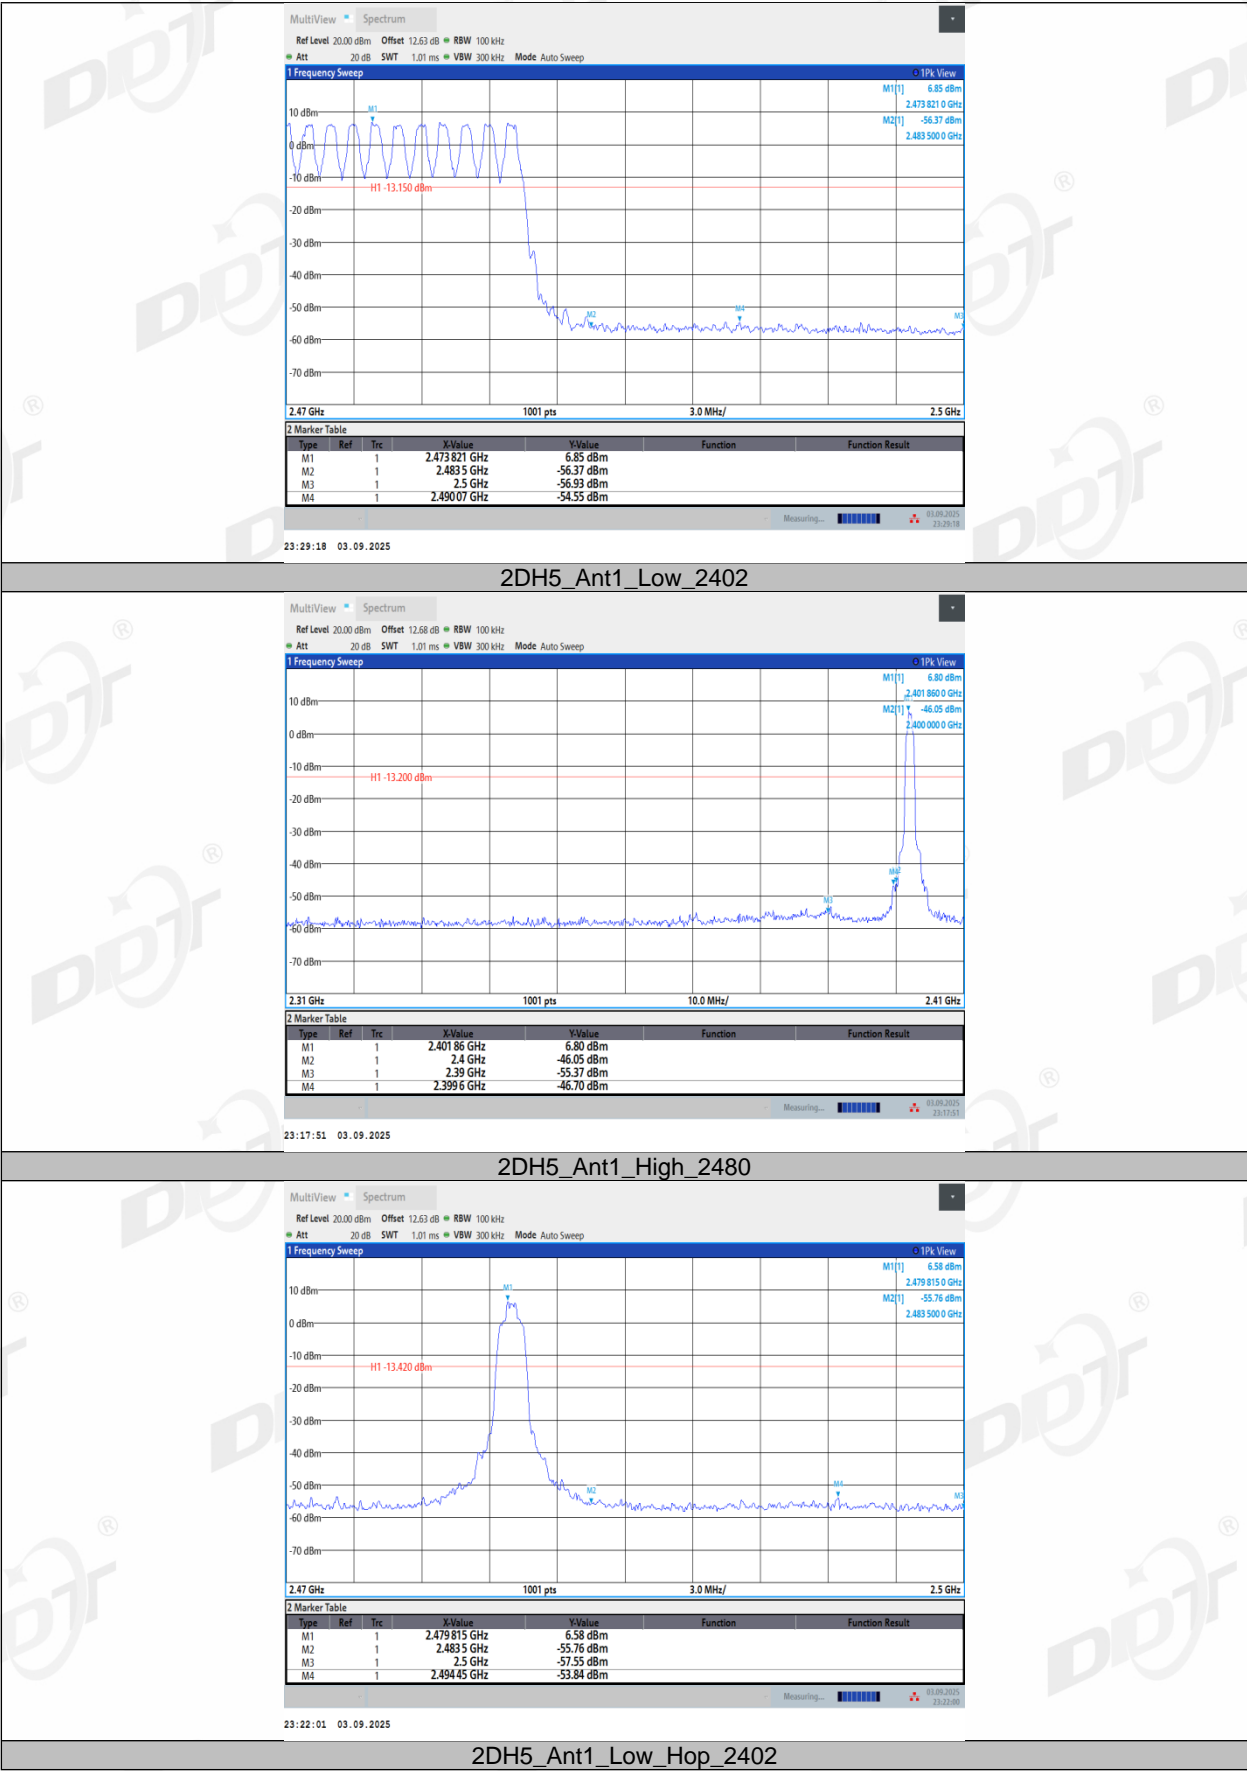


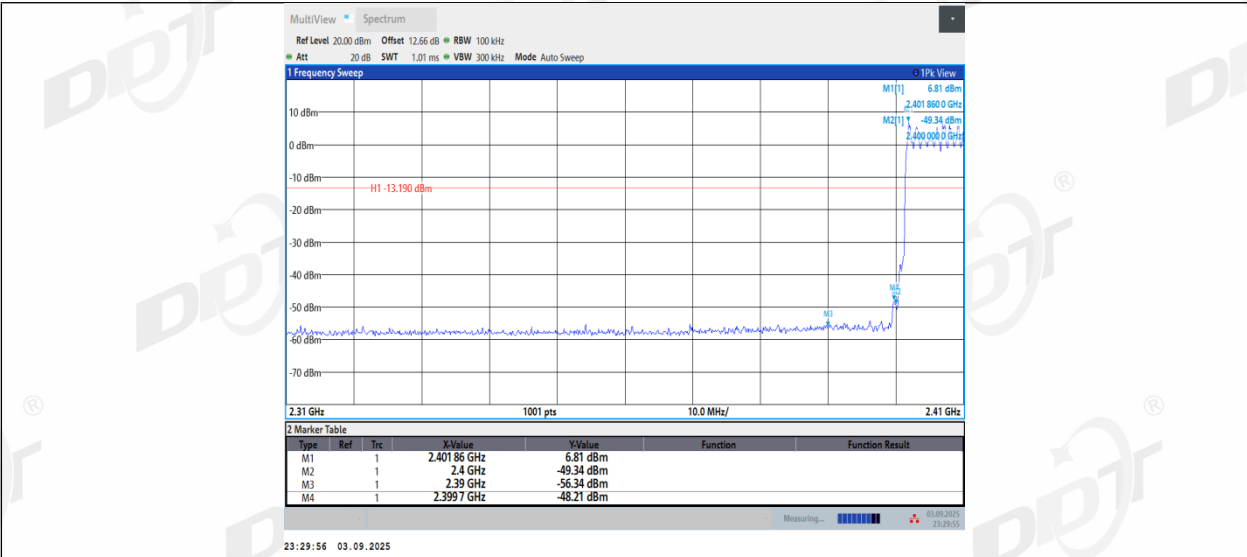

2DH5\_Ant1\_High\_Hop\_2480

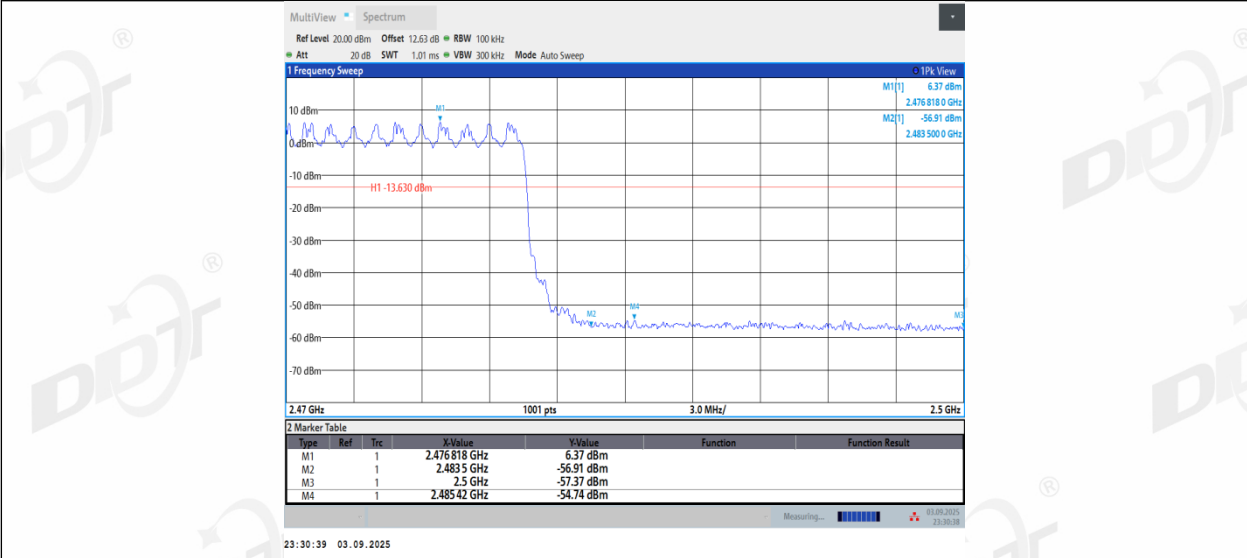

3DH5\_Ant1\_Low\_2402

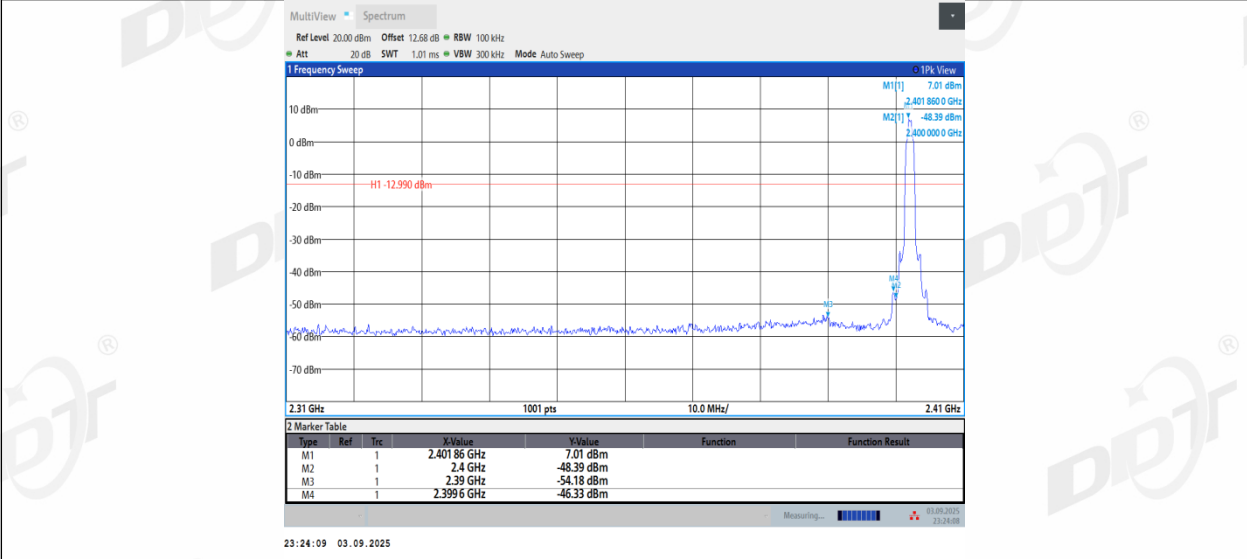


3DH5\_Ant1\_High\_2480





11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

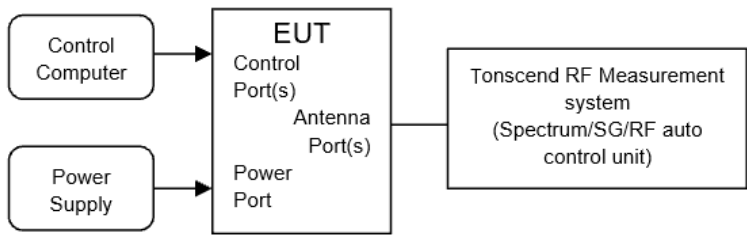

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.6 °C,43.3 %RH	Test Date:	2025.09.03
Test Power Supply:	Battery	Sample Number:	S25042508-021


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

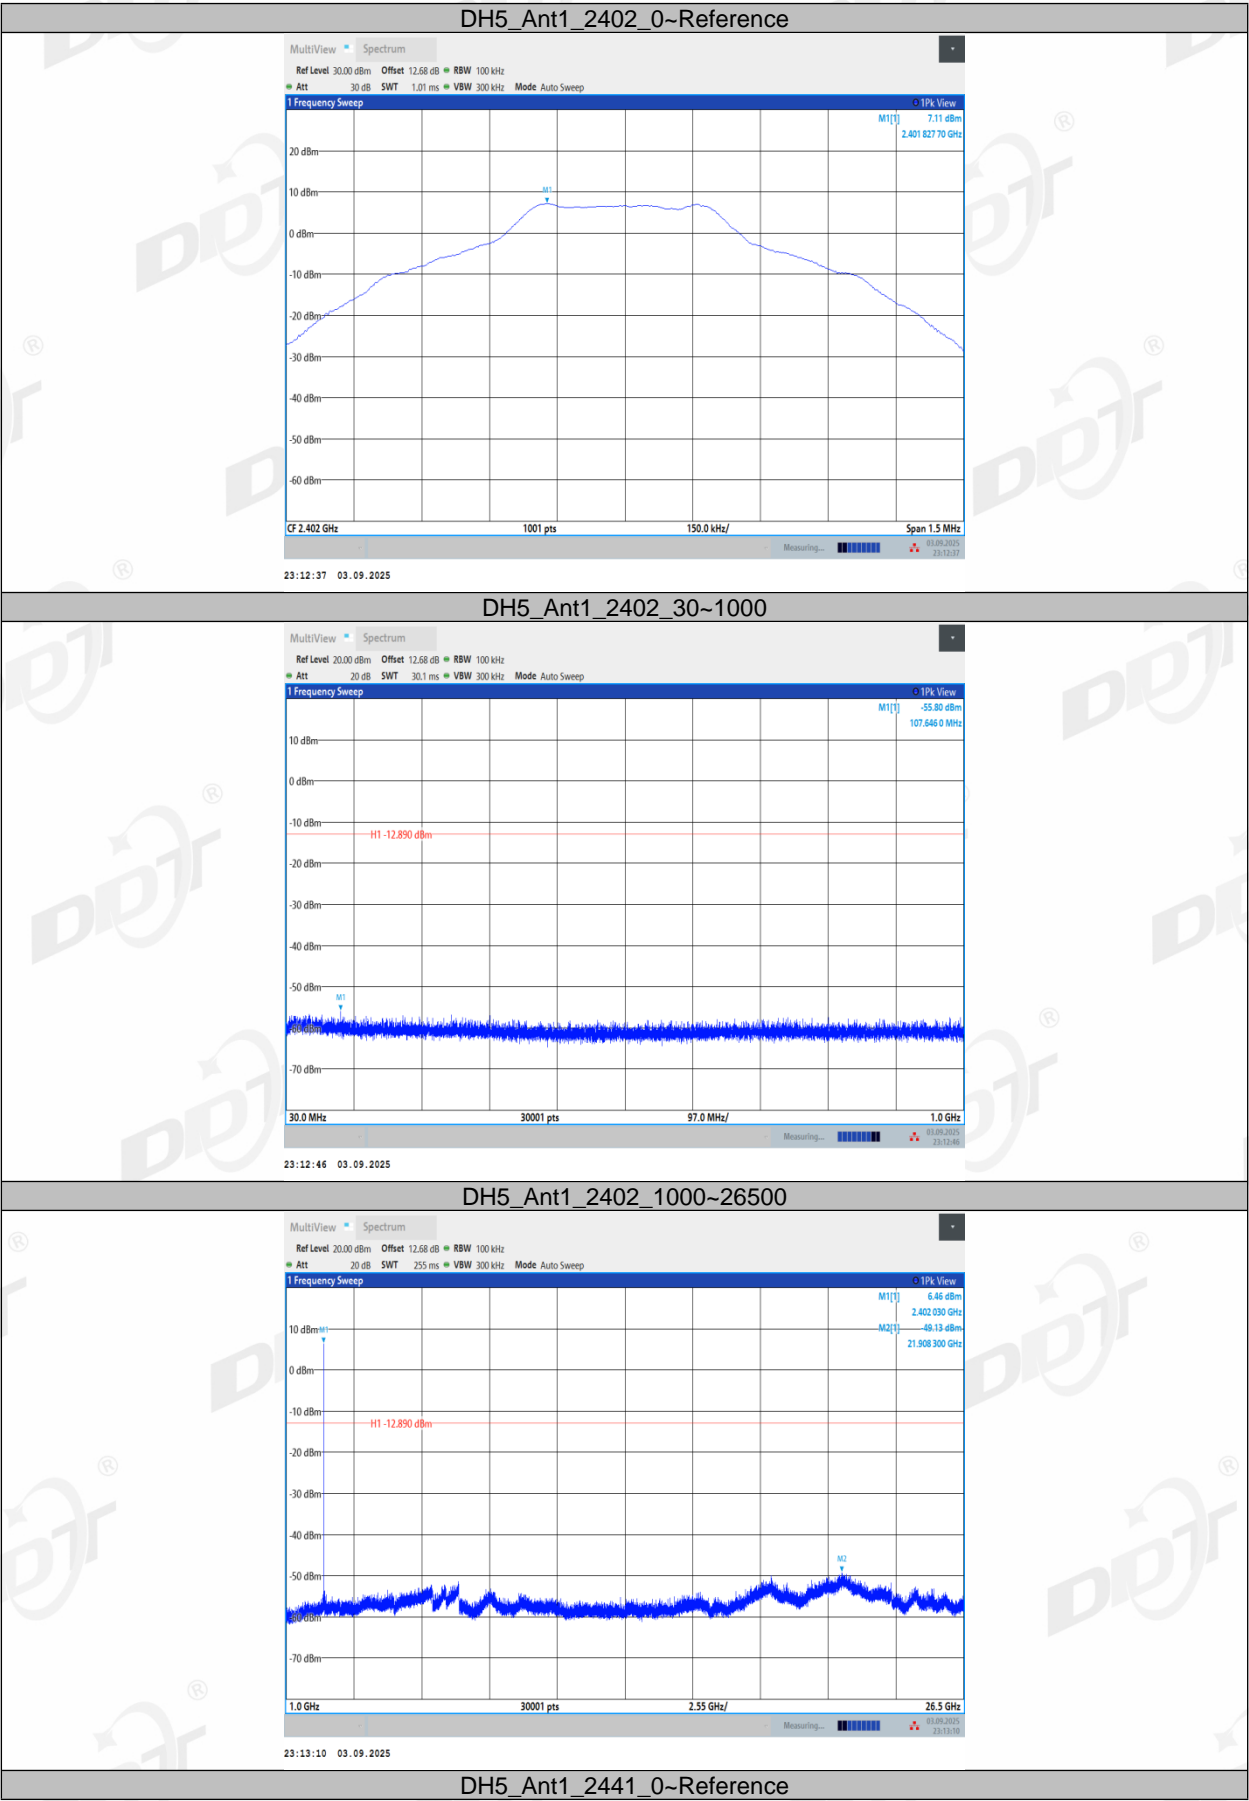


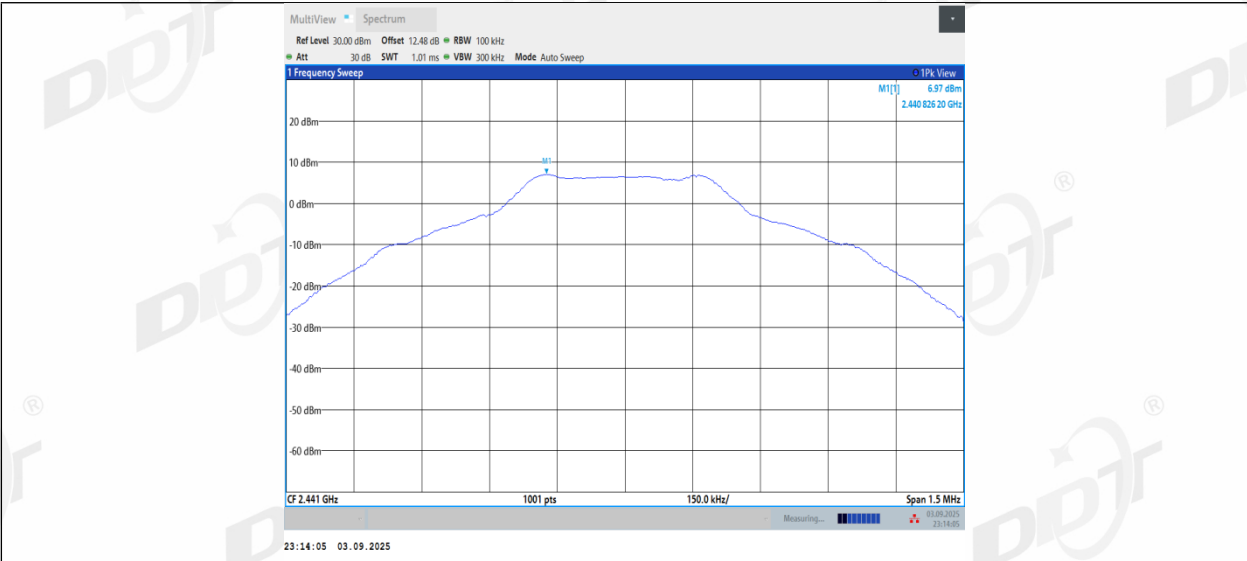


DH5\_Ant1\_2441\_30~1000

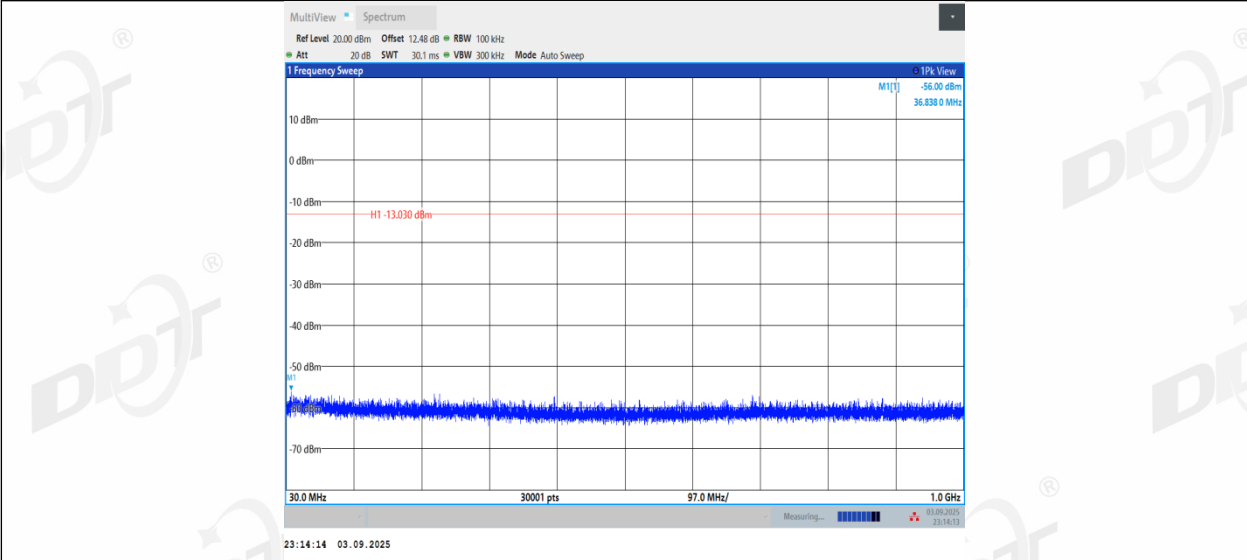


DH5\_Ant1\_2441\_1000~26500

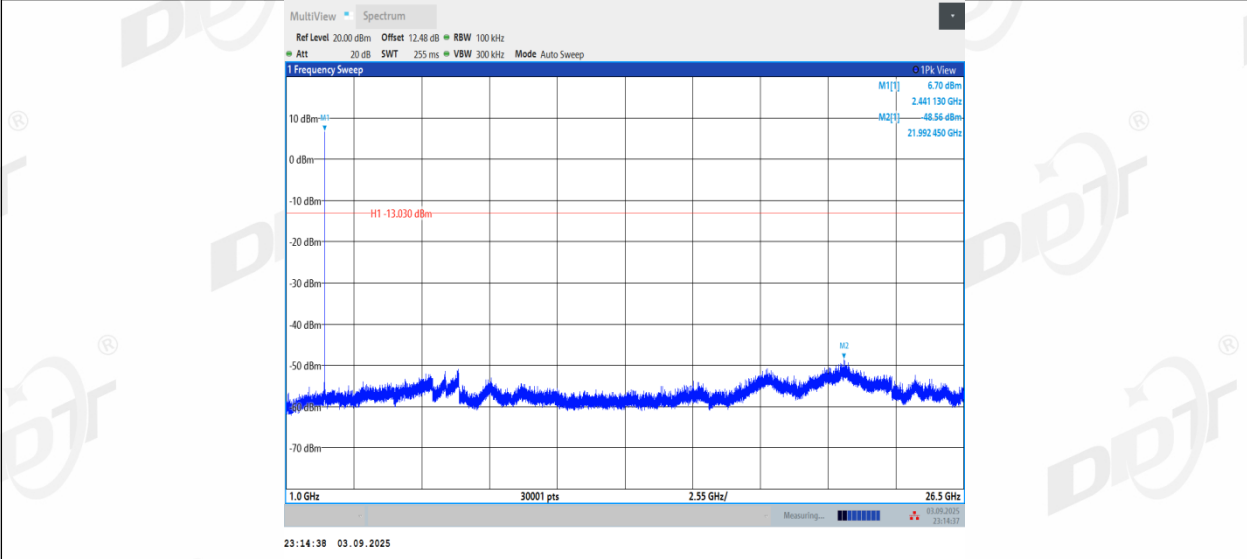


DH5\_Ant1\_2480\_0~Reference

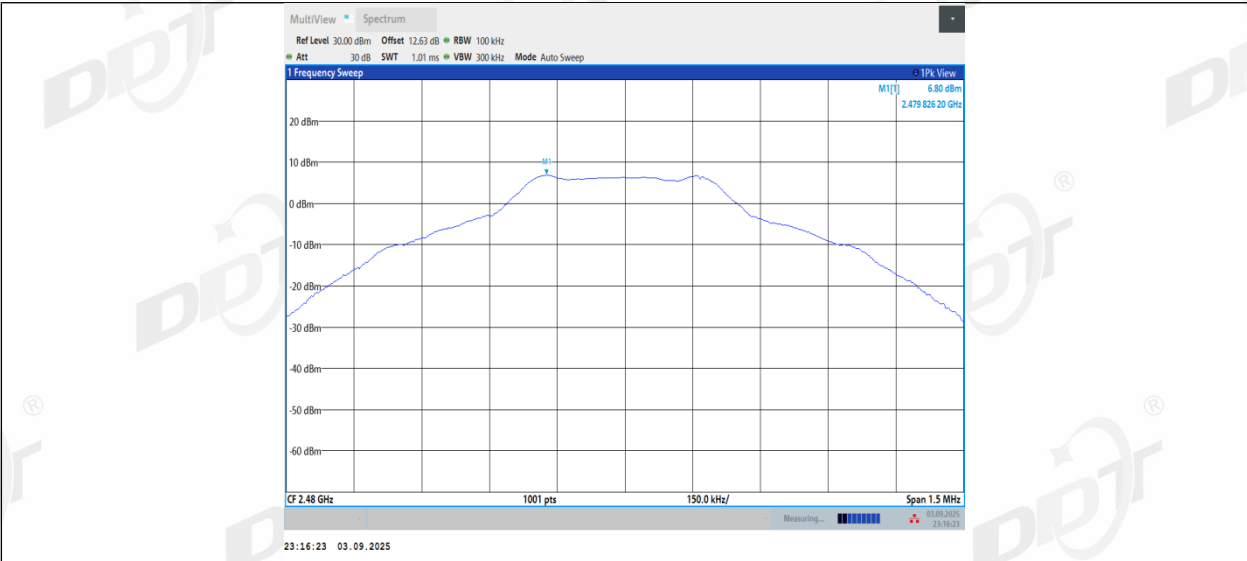

DH5\_Ant1\_2480\_30~1000

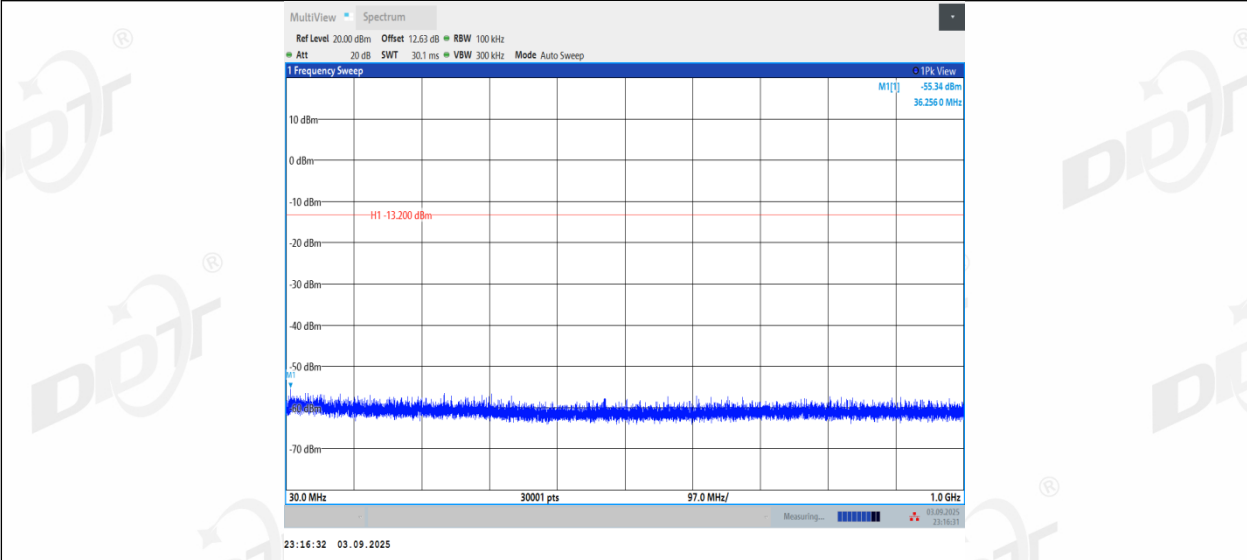

DH5\_Ant1\_2480\_1000~26500

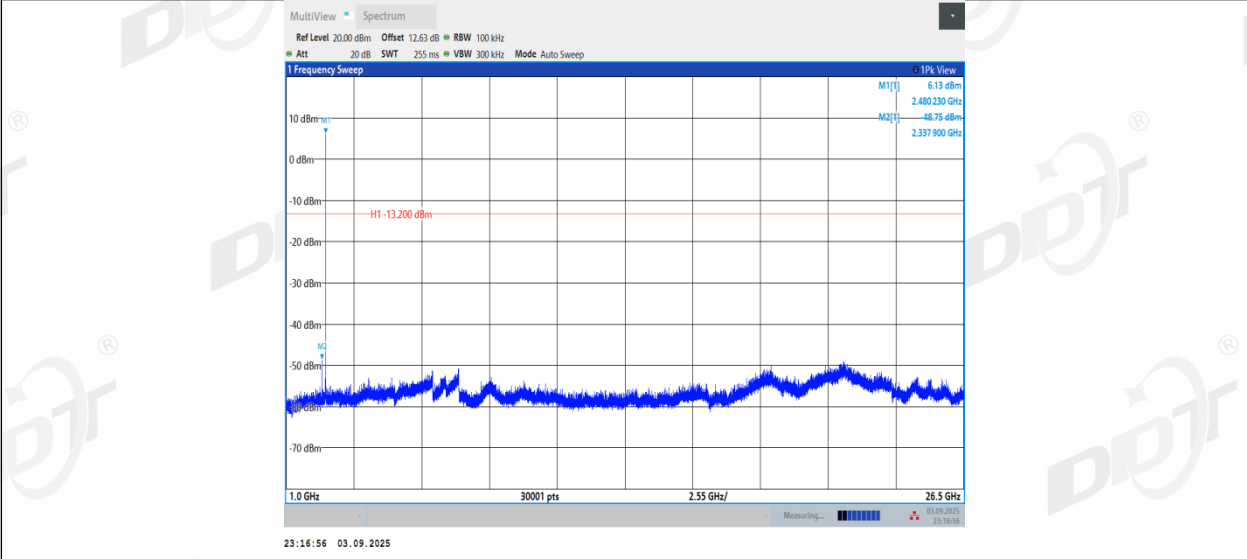

2DH5\_Ant1\_2402\_0~Reference
















## 12. Duty cycle

### 12.1. Block diagram of test setup

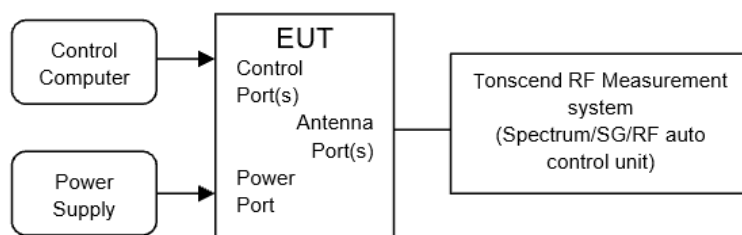

### 12.2. Limit

Just for Report.

### 12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.  
set the Spectrum Analyzer as below:  
Centre Frequency: The centre frequency of the middle hopping channel.  
Resolution BW: 10 MHz.  
Video BW: 10 MHz.  
Span: Zero span.  
Detector: Peak.  
Trace Mode: Clear Write.  
Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:  
$$\text{Duty cycle} = \text{Pulse's on time} / \text{Burst cycle}$$


12.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.3℃,43.1%RH	Test Date:	2025.07.02
Test Power Supply:	Battery	Sample Number:	S25042508-021

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.87	3.75	76.53	1.16
		2441	2.87	3.75	76.53	1.16
		2480	2.87	3.75	76.53	1.16
2DH5	Ant1	2402	2.88	3.75	76.80	1.15
		2441	2.88	3.75	76.80	1.15
		2480	2.88	3.75	76.80	1.15
3DH5	Ant1	2402	2.89	3.76	76.86	1.14
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.76	76.86	1.14



12.5. Test graphs

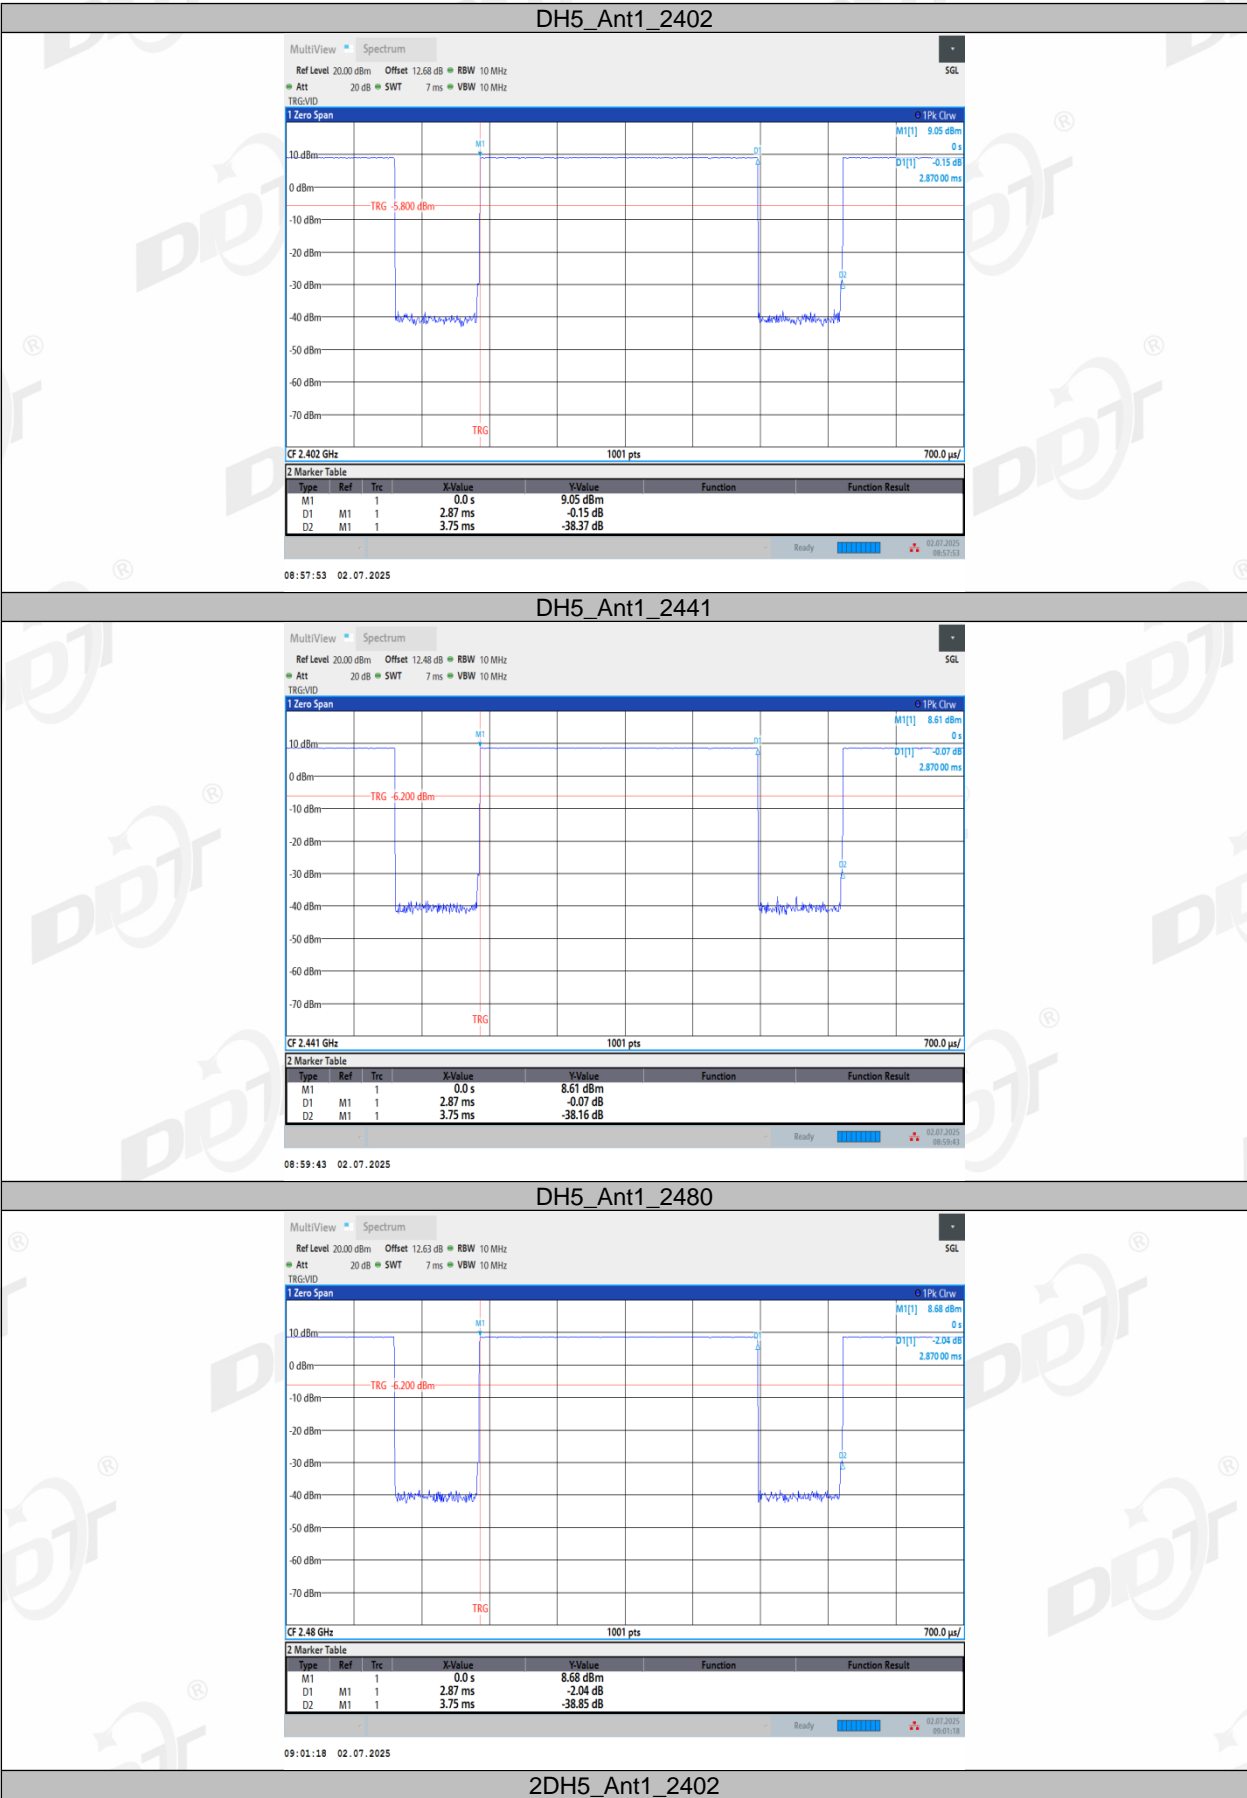





## 13. Antenna Requirements

### 13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

### 13.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


## 14. Radiated Emission

### 14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28

14.2. Block diagram of test setup

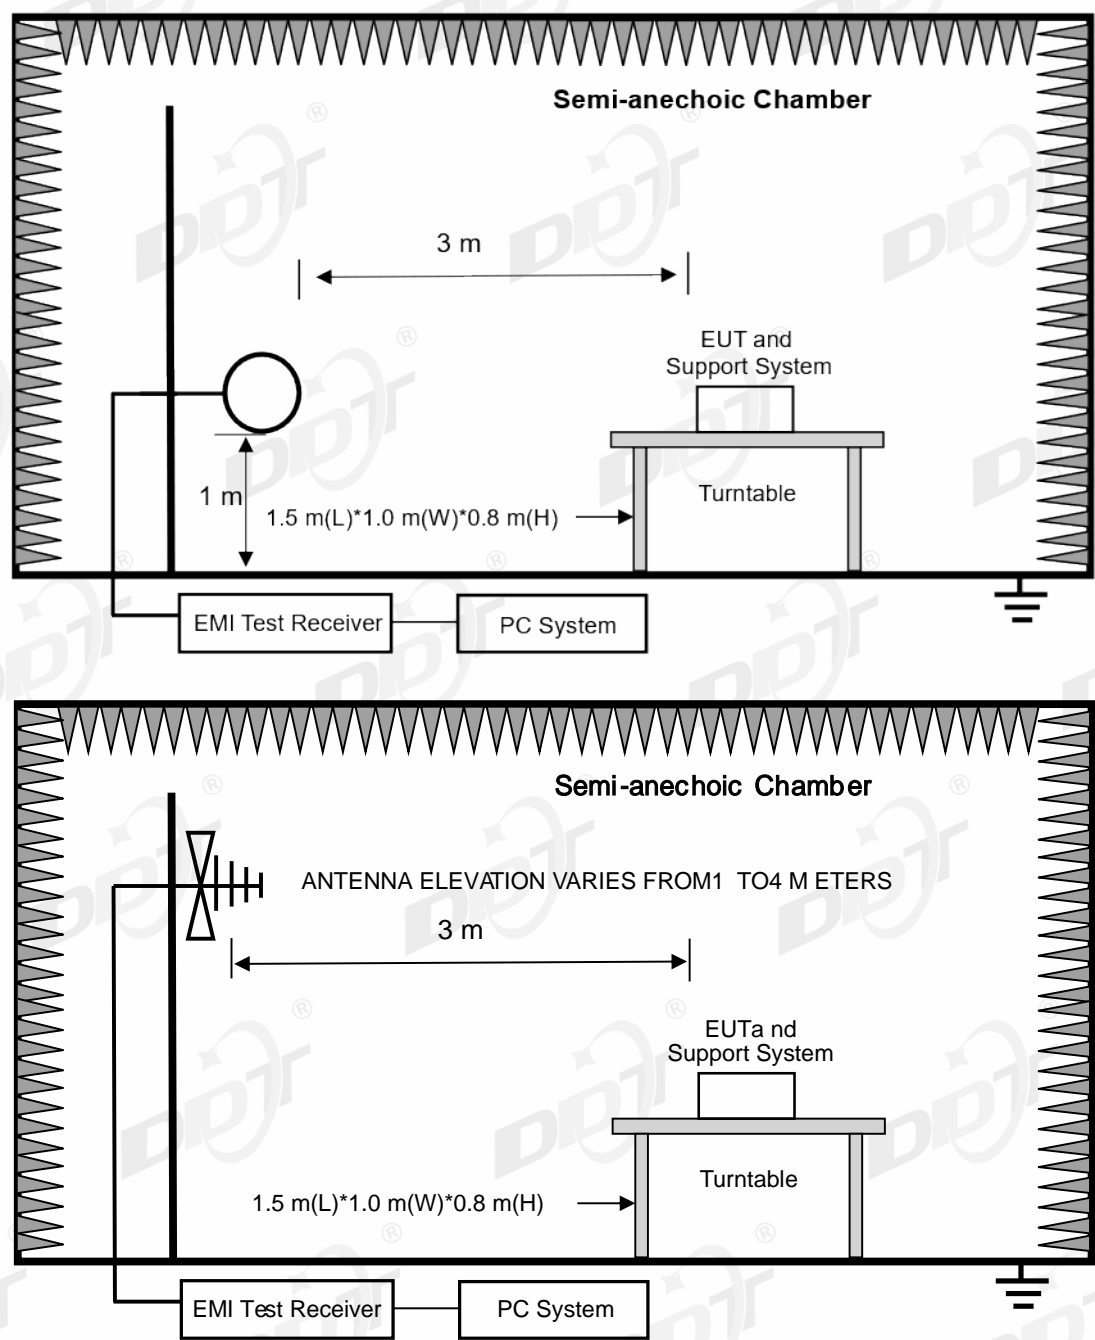

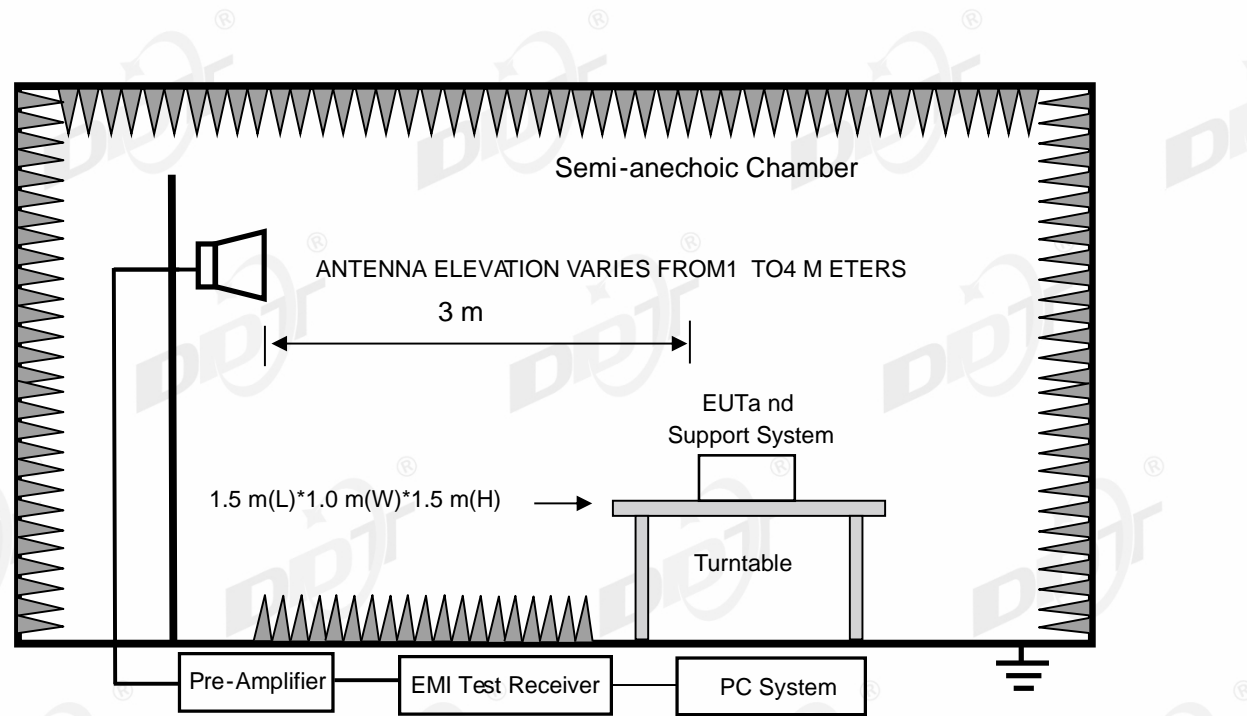

14.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6



## RSS-Gen section 8.10 Restricted frequency bands\*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

\* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## (2) FCC 15.209 Limit &amp; RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

#### 14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

#### 14.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with GFSK,  $\pi/4$ -DQPSK and 8DPSK, the worst case is record and reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.


## 14.6. Test result

**PASS.** (See below detailed test result)

## 14.7. Test data

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-07-01 **Tested By:** Nan Zhong  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\FCC Below 1G\20250701-083257\_H  
**Memo:** Sample Number: S25042508-010 (Battery model: FG4CELL21201)

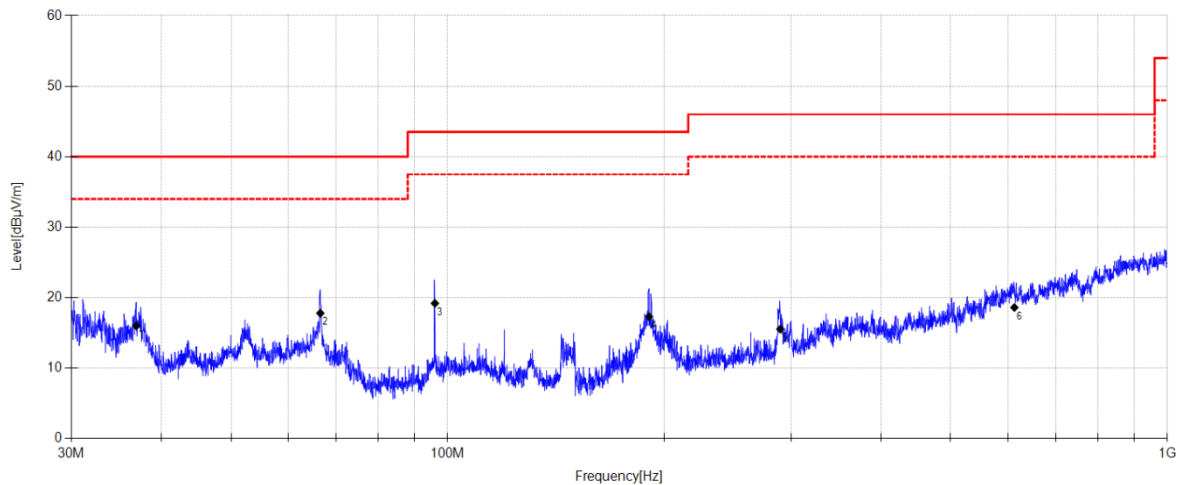


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36.920	31.59	11.72	3.80	16.01	40.00	23.99	QP	Horizontal
2	66.535	34.19	10.70	4.00	17.79	40.00	22.21	QP	Horizontal
3	96.009	35.3	10.80	4.19	19.19	43.50	24.31	QP	Horizontal
4	190.468	33.99	9.79	4.71	17.30	43.50	26.20	QP	Horizontal
5	289.886	28.57	13.18	5.17	15.54	46.00	30.46	QP	Horizontal
6	612.983	24.77	18.92	6.41	18.60	46.00	27.40	QP	Horizontal

## Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-07-01 **Tested By:** Nan Zhong  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\FCC Below 1G\20250701-083343\_V  
**Memo:** Sample Number: S25042508-010 (Battery model: FG4CELL21201)

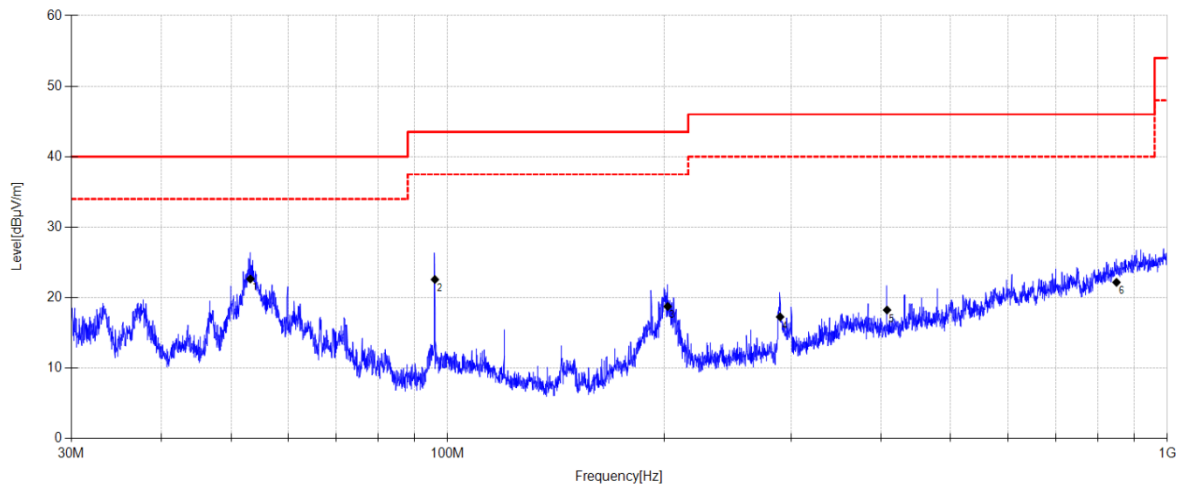**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	53.200	36.5	13.34	3.91	22.65	40.00	17.35	QP	Vertical
2	96.009	38.68	10.80	4.19	22.57	43.50	20.93	QP	Vertical
3	202.165	34.47	10.71	4.77	18.75	43.50	24.75	QP	Vertical
4	289.683	30.34	13.14	5.17	17.27	46.00	28.73	QP	Vertical
5	407.874	29.1	14.94	5.65	18.24	46.00	27.76	QP	Vertical
6	849.870	24.7	21.20	7.07	22.17	46.00	23.83	QP	Vertical

**Note:**

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-31

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Below 1G\1

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

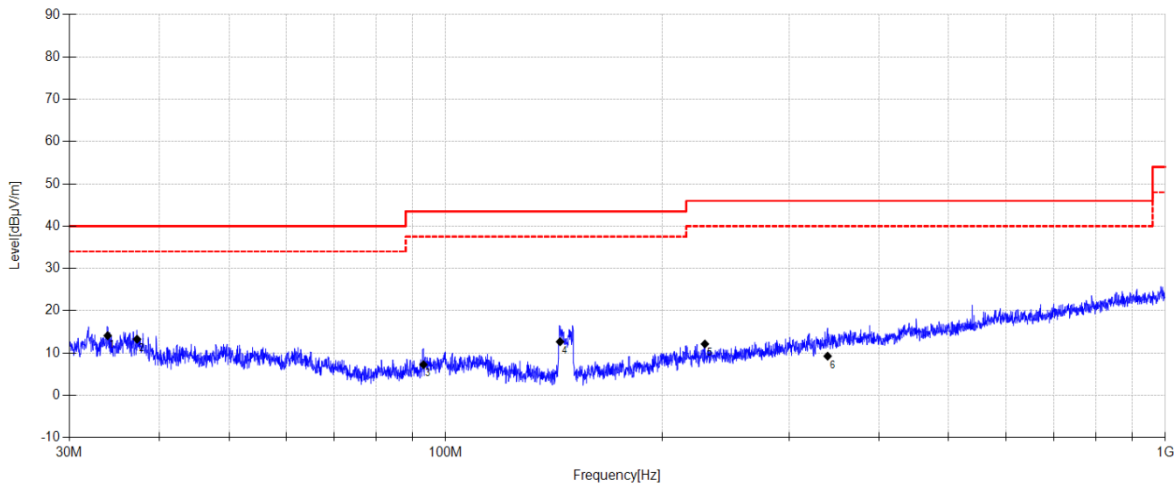

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.917	31.38	11.27	3.75	14.10	40.00	25.90	QP	Horizontal
2	37.258	29.59	12.20	3.78	13.27	40.00	26.73	QP	Horizontal
3	93.157	25.28	10.13	4.14	7.25	43.50	36.25	QP	Horizontal
4	144.188	32.16	8.54	4.31	12.67	43.50	30.83	QP	Horizontal
5	229.200	27.78	12.09	4.67	12.14	46.00	33.86	QP	Horizontal
6	339.424	22.18	14.21	5.31	9.26	46.00	36.74	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-31

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Below 1G\2

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

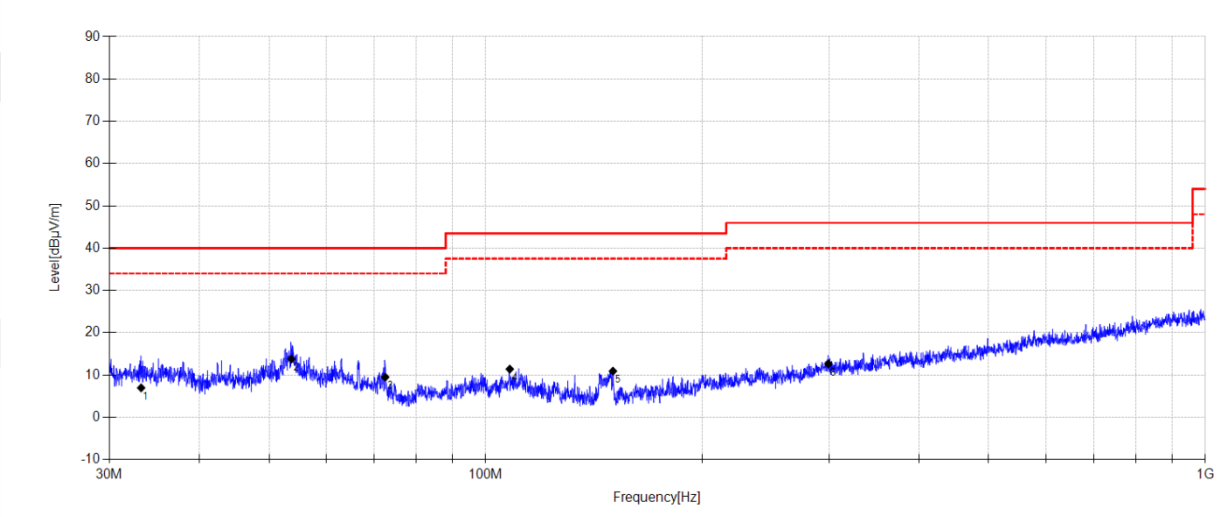

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.211	24.53	10.98	3.75	6.96	40.00	33.04	QP	Vertical
2	53.725	28.83	13.34	3.91	13.78	40.00	26.22	QP	Vertical
3	72.528	28.44	9.34	4.02	9.50	40.00	30.50	QP	Vertical
4	108.011	27.99	11.51	4.21	11.40	43.50	32.10	QP	Vertical
5	150.278	30.83	8.11	4.33	10.92	43.50	32.58	QP	Vertical
6	299.388	26.33	13.56	5.14	12.63	46.00	33.37	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\9

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

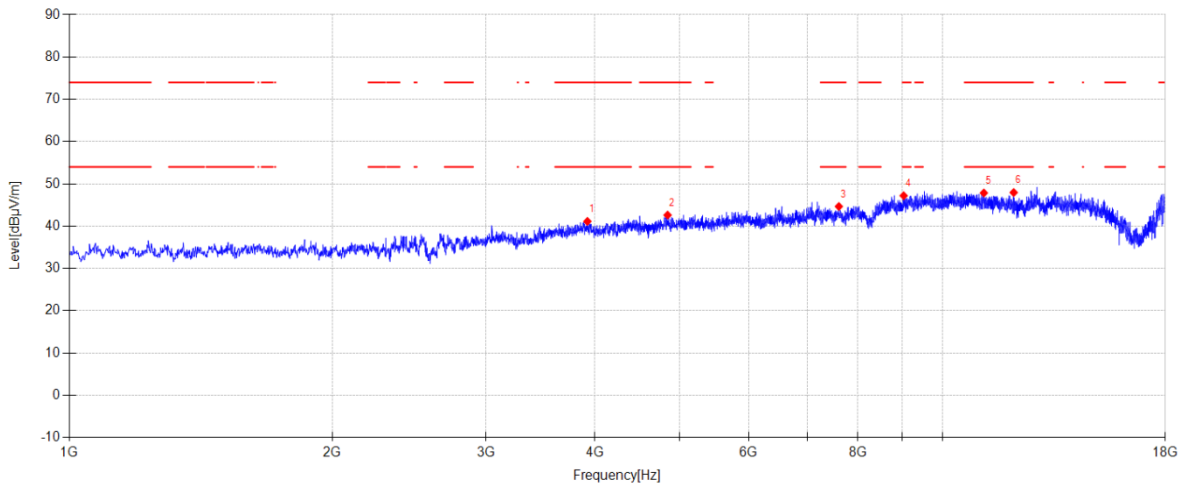

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3920.600	46.18	31.16	3.45	-39.66	41.13	74.00	32.87	PK	Horizontal
2	4843.700	44.66	33.64	3.93	-39.61	42.62	74.00	31.38	PK	Horizontal
3	7609.600	43.66	36.52	4.93	-40.45	44.66	74.00	29.34	PK	Horizontal
4	9027.400	41.95	38.35	5.72	-38.82	47.20	74.00	26.80	PK	Horizontal
5	11154.100	41.58	39.25	6.18	-39.15	47.86	74.00	26.14	PK	Horizontal
6	12067.000	42.40	39.27	6.27	-39.99	47.95	74.00	26.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\10

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

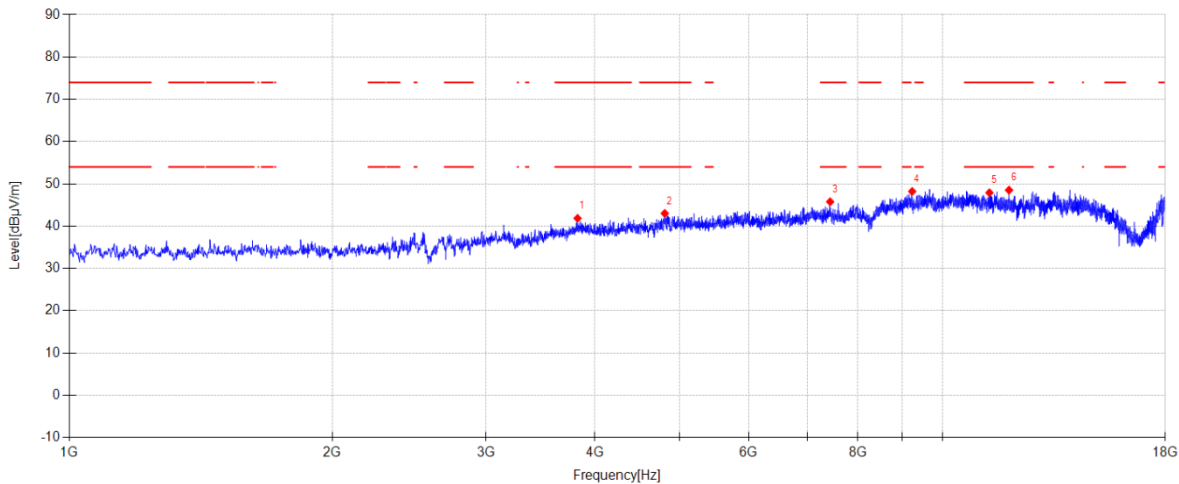

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3820.300	47.31	30.78	3.41	-39.64	41.86	74.00	32.14	PK	Vertical
2	4808.000	46.02	32.71	3.91	-39.62	43.02	74.00	30.98	PK	Vertical
3	7436.200	44.87	36.63	4.88	-40.61	45.77	74.00	28.23	PK	Vertical
4	9233.100	42.80	38.60	5.81	-38.99	48.22	-	-	PK	Vertical
5	11319.000	41.81	39.22	6.20	-39.32	47.91	74.00	26.09	PK	Vertical
6	11919.100	43.21	38.96	6.28	-39.92	48.53	74.00	25.47	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2441MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\11

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

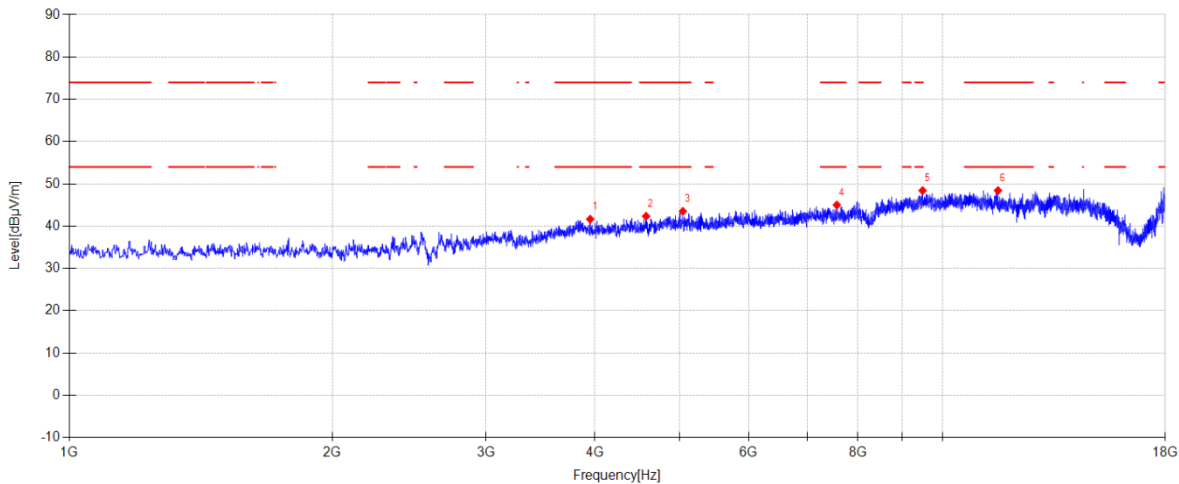

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3949.500	46.77	31.10	3.45	-39.67	41.65	74.00	32.35	PK	Horizontal
2	4576.800	46.28	31.90	3.79	-39.63	42.34	74.00	31.66	PK	Horizontal
3	5042.600	45.79	33.29	4.04	-39.60	43.52	74.00	30.48	PK	Horizontal
4	7568.800	44.13	36.44	4.92	-40.49	45.00	74.00	29.00	PK	Horizontal
5	9489.800	42.97	38.70	5.93	-39.19	48.41	74.00	25.59	PK	Horizontal
6	11577.400	42.71	39.05	6.24	-39.58	48.42	74.00	25.58	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2441MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\12

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

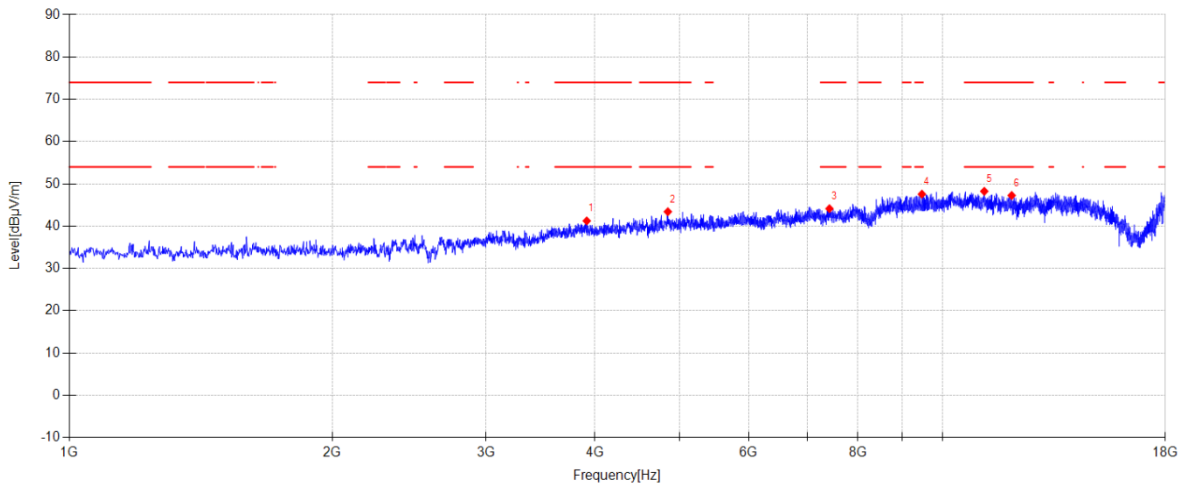

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3913.800	46.30	31.17	3.44	-39.66	41.25	74.00	32.75	PK	Vertical
2	4847.100	45.36	33.72	3.94	-39.61	43.41	74.00	30.59	PK	Vertical
3	7422.600	43.23	36.65	4.88	-40.62	44.14	74.00	29.86	PK	Vertical
4	9472.800	42.13	38.70	5.92	-39.18	47.57	74.00	26.43	PK	Vertical
5	11166.000	42.01	39.23	6.18	-39.17	48.25	74.00	25.75	PK	Vertical
6	12002.400	41.77	39.20	6.29	-40.00	47.26	74.00	26.74	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\13

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

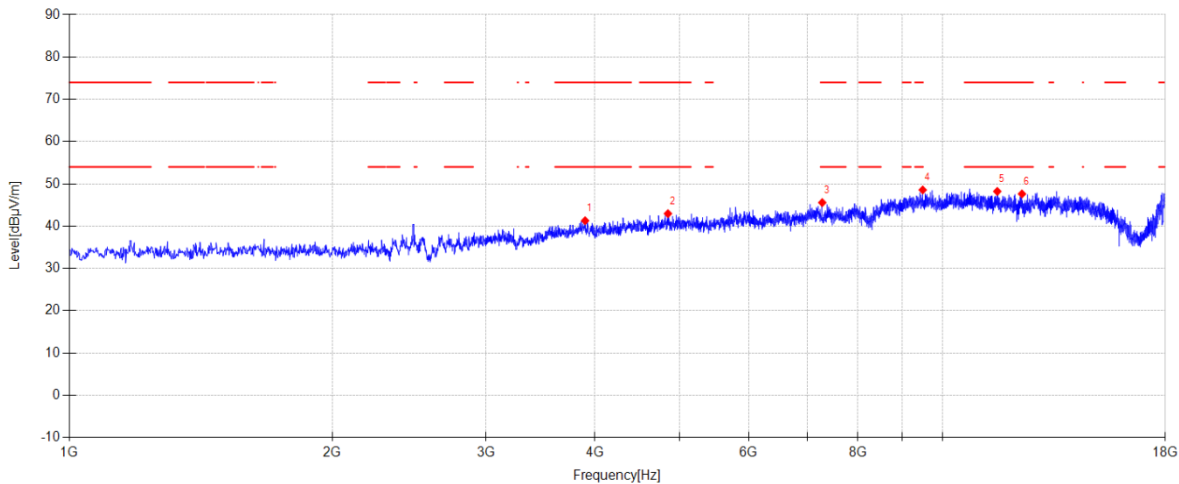

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3896.800	46.34	31.18	3.44	-39.66	41.30	74.00	32.70	PK	Horizontal
2	4848.800	44.86	33.77	3.94	-39.61	42.96	74.00	31.04	PK	Horizontal
3	7283.200	44.61	36.87	4.84	-40.75	45.57	74.00	28.43	PK	Horizontal
4	9493.200	43.13	38.70	5.93	-39.19	48.57	74.00	25.43	PK	Horizontal
5	11555.300	42.46	39.09	6.23	-39.56	48.22	74.00	25.78	PK	Horizontal
6	12333.900	42.08	39.30	6.18	-39.93	47.63	74.00	26.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\14

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

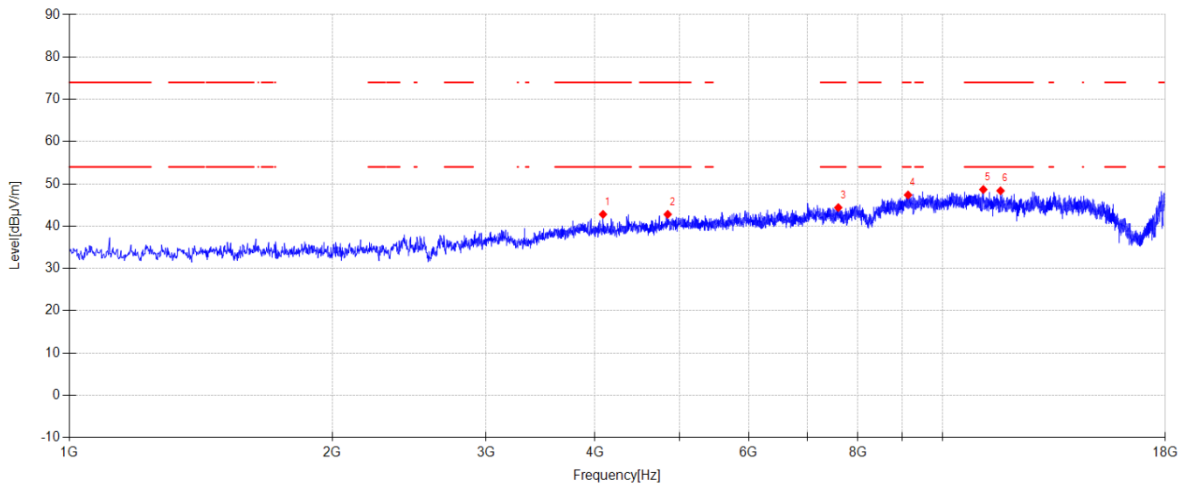

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4085.500	47.87	31.07	3.52	-39.67	42.79	74.00	31.21	PK	Vertical
2	4845.400	44.79	33.68	3.93	-39.61	42.79	74.00	31.21	PK	Vertical
3	7597.700	43.42	36.50	4.93	-40.46	44.39	74.00	29.61	PK	Vertical
4	9132.800	42.01	38.50	5.77	-38.91	47.37	74.00	26.63	PK	Vertical
5	11137.100	42.36	39.26	6.18	-39.14	48.66	74.00	25.34	PK	Vertical
6	11655.600	42.78	39.00	6.25	-39.66	48.37	74.00	25.63	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




## 15. Band Edge Compliance

### 15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28



15.2. Block diagram of test setup

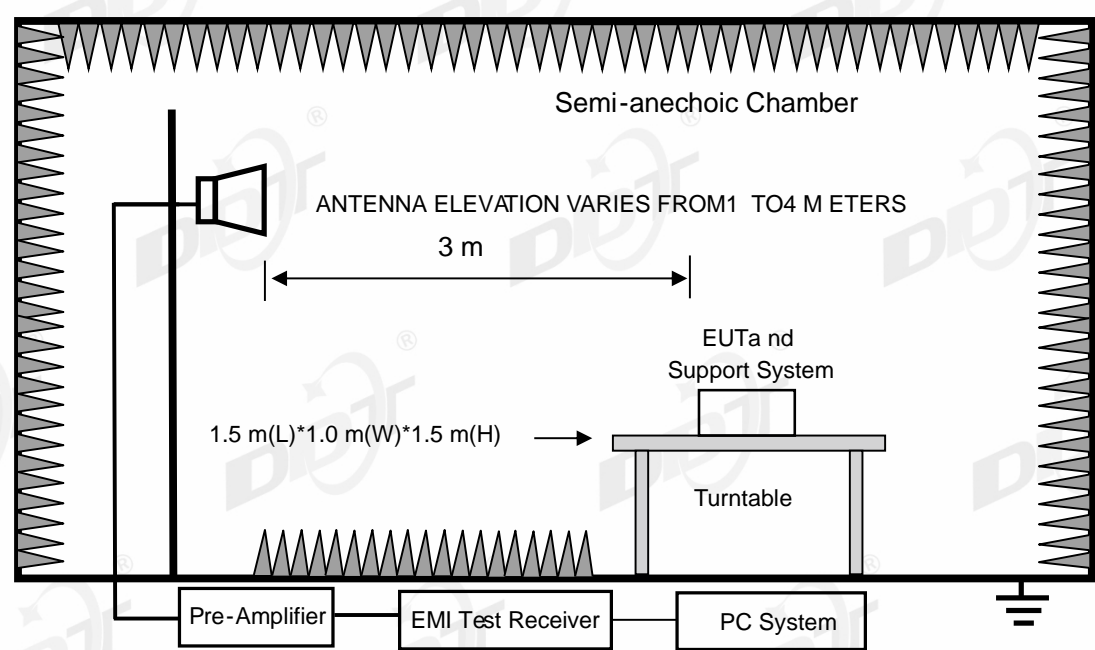

15.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.  
Remark: All restriction band have been tested, and only the worst case is shown in report.


15.6. Test result

PASS. (See below detailed test result)

## 15.7. Test data

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\15  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

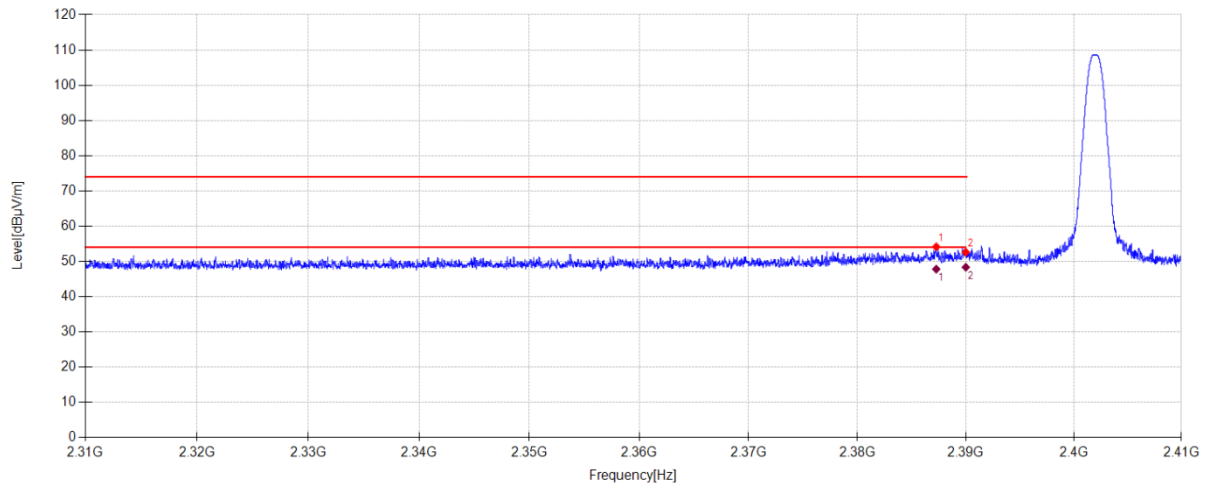

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.270	22.06	27.25	4.83	0.00	54.14	74.00	19.86	PK	Horizontal
2	2390.000	20.51	27.26	4.84	0.00	52.61	74.00	21.39	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.270	15.72	27.25	4.83	47.80	54.00	6.20	AV	Horizontal
2	2390.000	16.24	27.26	4.84	48.34	54.00	5.66	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\16  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

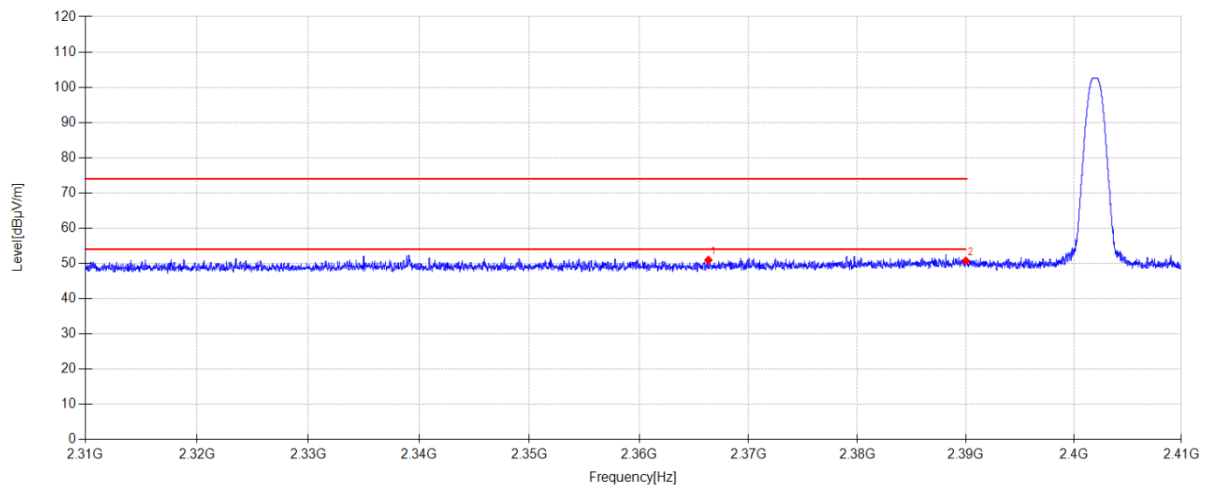**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2366.330	18.95	27.17	4.82	0.00	50.94	74.00	23.06	PK	Vertical
2	2390.000	18.62	27.26	4.84	0.00	50.72	74.00	23.28	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX 3DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\23  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

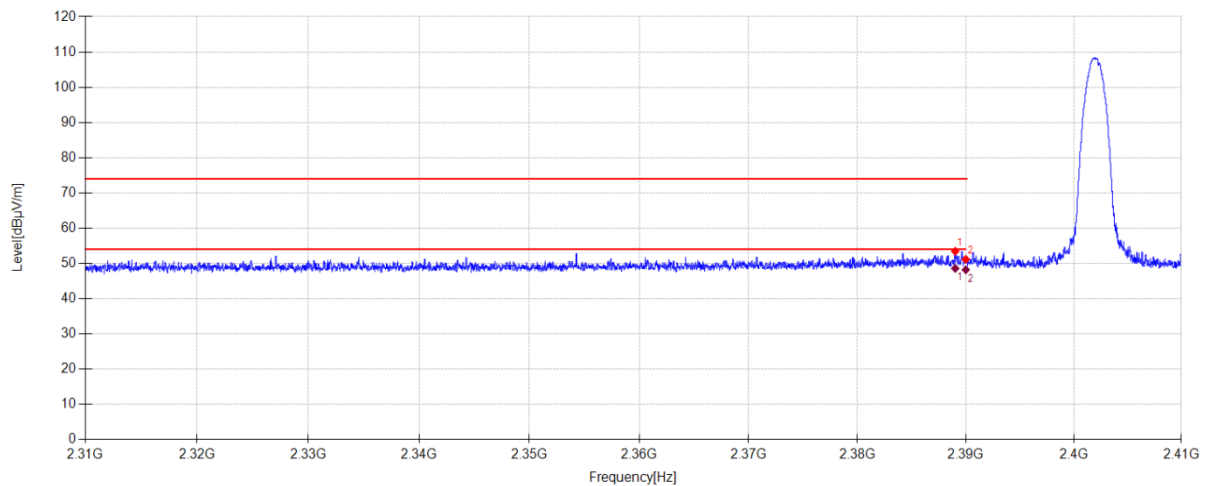**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.020	21.34	27.26	4.84	0.00	53.44	74.00	20.56	PK	Horizontal
2	2390.000	19.05	27.26	4.84	0.00	51.15	74.00	22.85	PK	Horizontal

**Final Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.020	16.48	27.26	4.84	48.58	54.00	5.42	AV	Horizontal
2	2390.000	16.09	27.26	4.84	48.19	54.00	5.81	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX 3DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\24  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

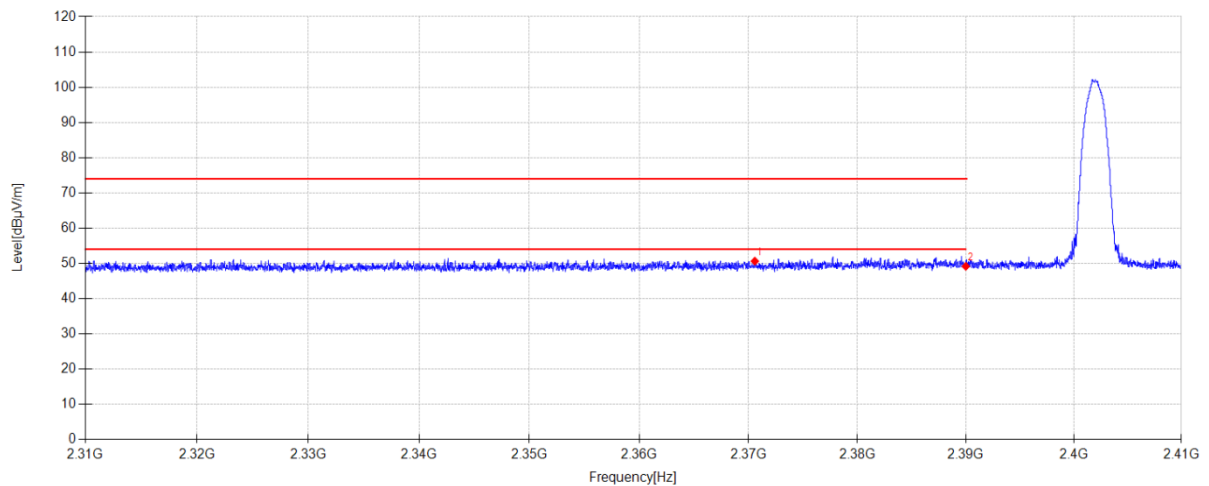**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2370.580	18.64	27.18	4.82	0.00	50.64	74.00	23.36	PK	Vertical
2	2390.000	17.07	27.26	4.84	0.00	49.17	74.00	24.83	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX 2DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\25  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

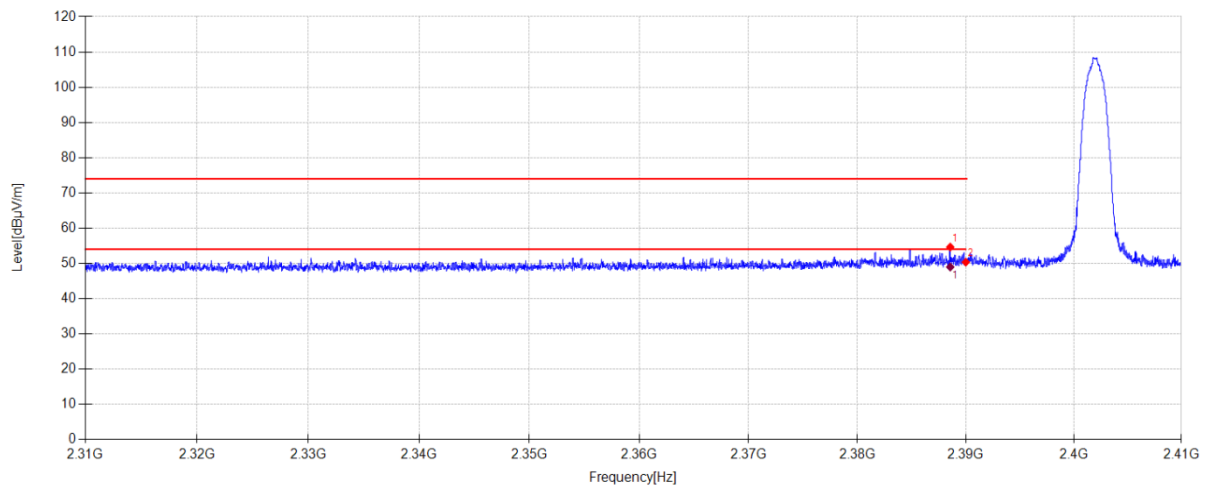**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.560	22.55	27.25	4.83	0.00	54.63	74.00	19.37	PK	Horizontal
2	2390.000	18.25	27.26	4.84	0.00	50.35	74.00	23.65	PK	Horizontal

**Final Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.560	16.89	27.25	4.83	48.97	54.00	5.03	AV	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX 2DH5 2402MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\26  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

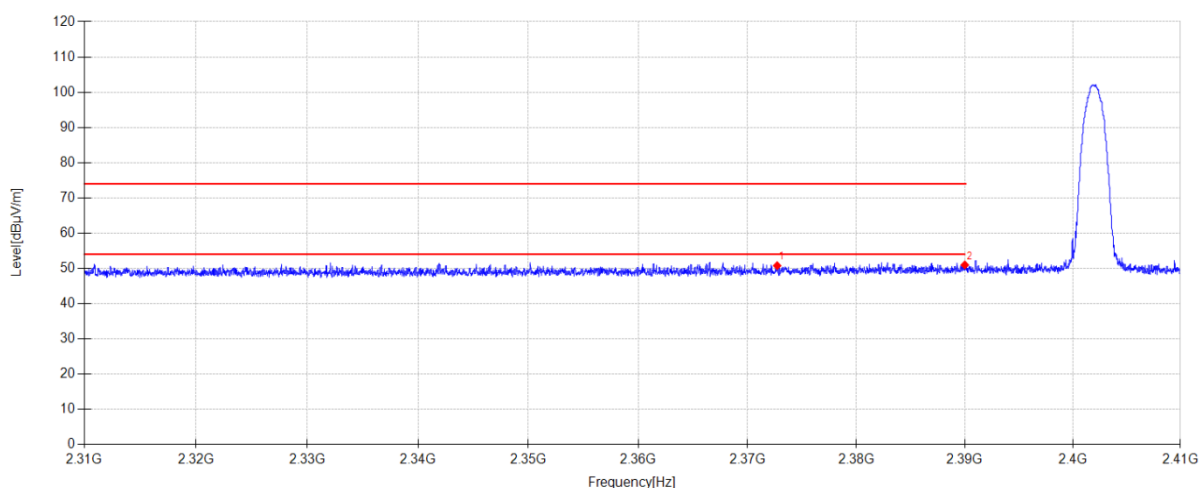**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.720	18.76	27.19	4.82	0.00	50.77	74.00	23.23	PK	Vertical
2	2390.000	18.88	27.26	4.84	0.00	50.98	74.00	23.02	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\17

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

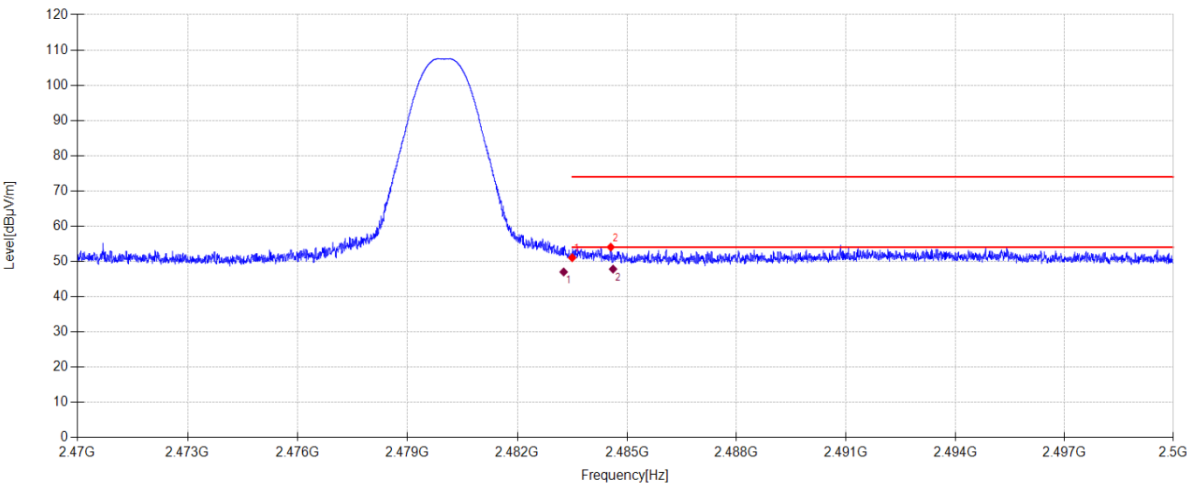

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.62	27.53	4.89	0.00	51.04	74.00	22.96	PK	Horizontal
2	2484.556	21.62	27.54	4.90	0.00	54.06	74.00	19.94	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.267	14.58	27.53	4.89	47.00	54.00	7.00	AV	Horizontal	
2	2484.619	15.38	27.54	4.90	47.82	54.00	6.18	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\18

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

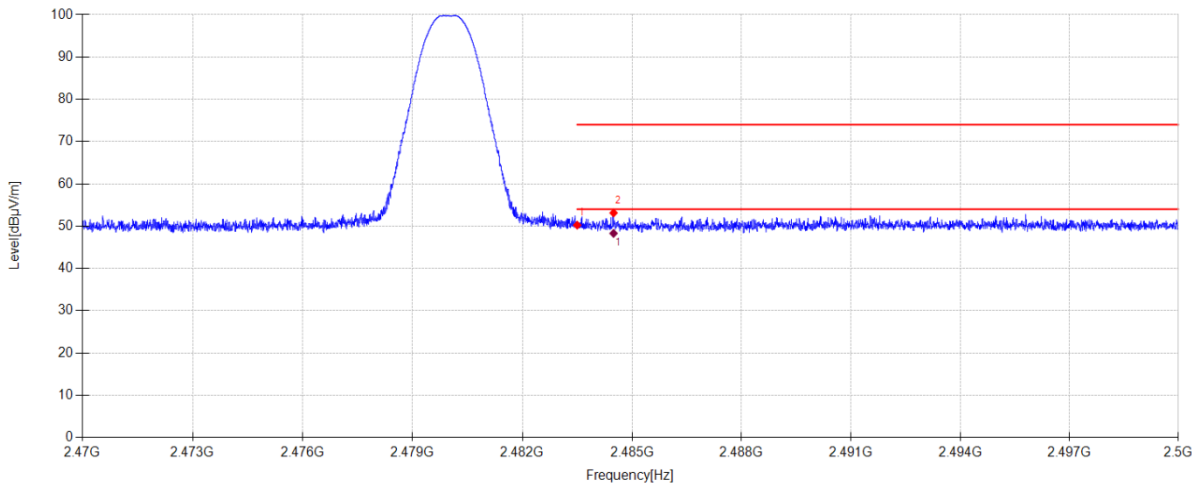

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.83	27.53	4.89	0.00	50.25	74.00	23.75	PK	Vertical
2	2484.496	20.69	27.54	4.90	0.00	53.13	74.00	20.87	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2484.496	15.85	27.54	4.90	48.29	54.00	5.71	AV	Vertical	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2025-08-29 **Tested By:** Lin Guoyuan  
**EUT:** Bluetooth Speaker **Model Number:** BANDBOX TRIO  
**Test Mode:** TX 2DH5 2480MHz Mode **Power Supply:** Battery  
**Condition:** Temp:23.9°C;Humi:54.9% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\19  
**Memo:** Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

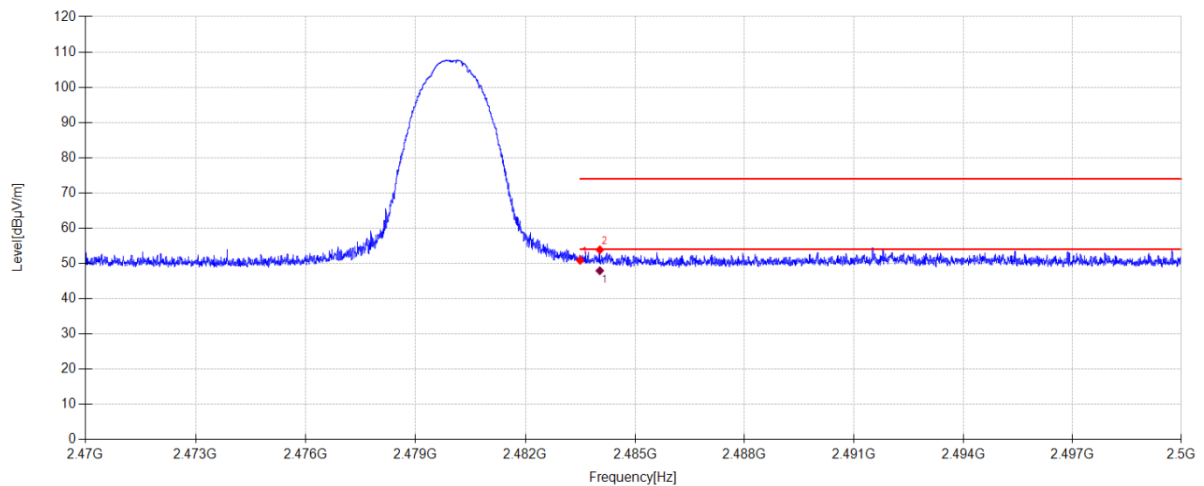**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.44	27.53	4.89	0.00	50.86	74.00	23.14	PK	Horizontal
2	2484.037	21.42	27.54	4.89	0.00	53.85	74.00	20.15	PK	Horizontal

**Final Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.037	15.49	27.54	4.89	47.92	54.00	6.08	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX 2DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\20

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

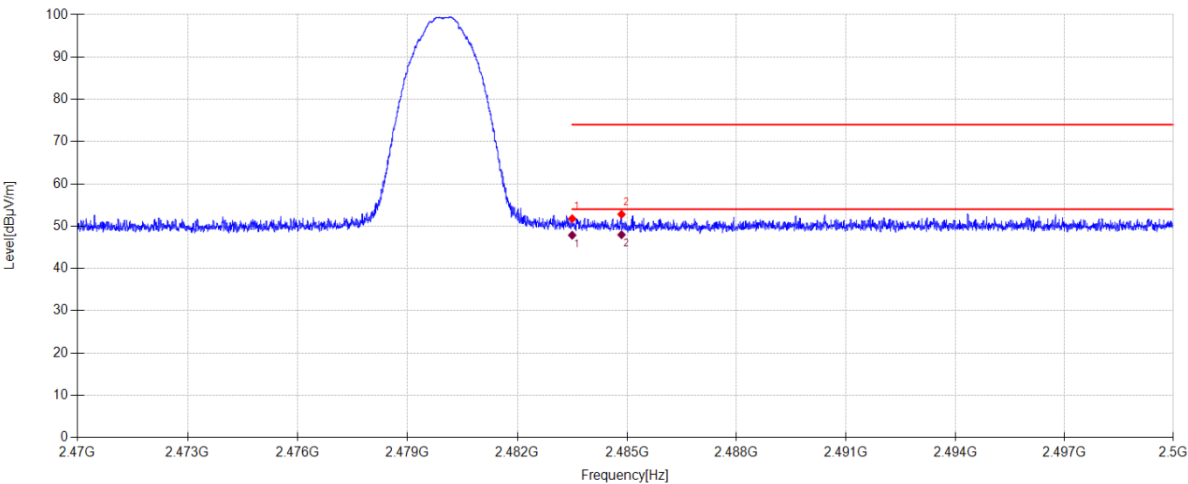

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.34	27.53	4.89	0.00	51.76	74.00	22.24	PK	Vertical
2	2484.850	20.36	27.54	4.90	0.00	52.80	74.00	21.20	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.44	27.53	4.89	47.86	54.00	6.14	AV	Vertical	
2	2484.850	15.53	27.54	4.90	47.97	54.00	6.03	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX 3DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\21

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

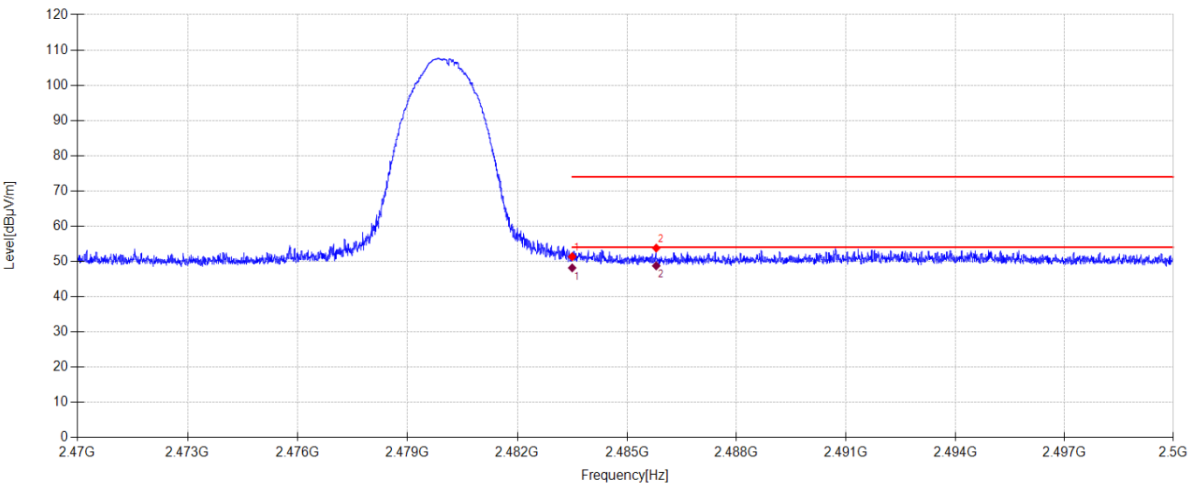

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.93	27.53	4.89	0.00	51.35	74.00	22.65	PK	Horizontal
2	2485.801	21.35	27.54	4.90	0.00	53.79	74.00	20.21	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	15.74	27.53	4.89	48.16	54.00	5.84	AV	Horizontal	
2	2485.801	16.30	27.54	4.90	48.74	54.00	5.26	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-29

Tested By:

Lin Guoyuan

EUT:

Bluetooth Speaker

Model Number:

BANDBOX TRIO

Test Mode:

TX 3DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:54.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25042508-1E\0829 FCC Above 1G BT\22

Memo:

Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

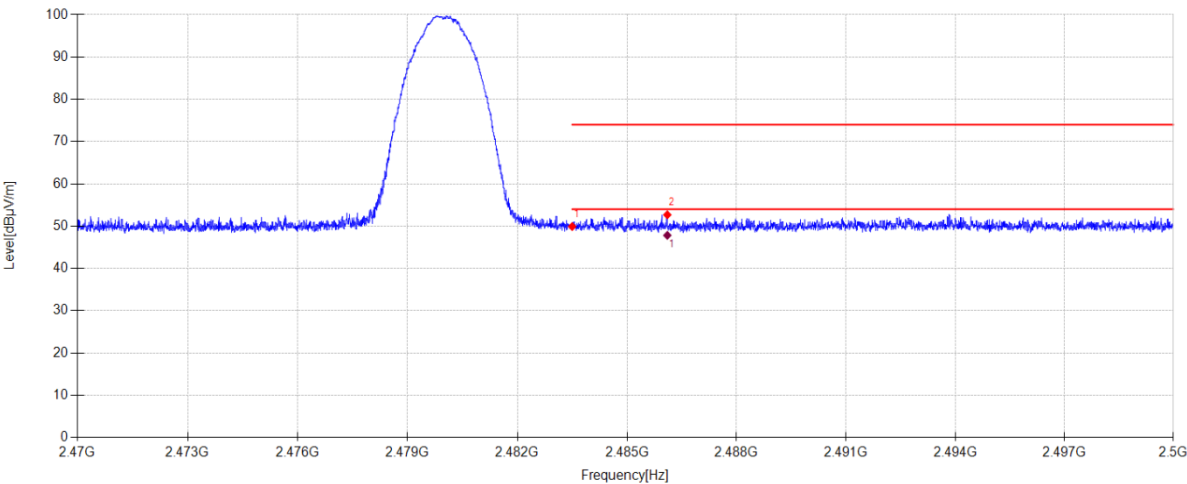

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.50	27.53	4.89	0.00	49.92	74.00	24.08	PK	Vertical
2	2486.104	20.25	27.54	4.90	0.00	52.69	74.00	21.31	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2486.104	15.39	27.54	4.90	47.83	54.00	6.17	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




## 16. Power Line Conducted Emissions

### 16.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/

### 16.2. Block diagram of test setup

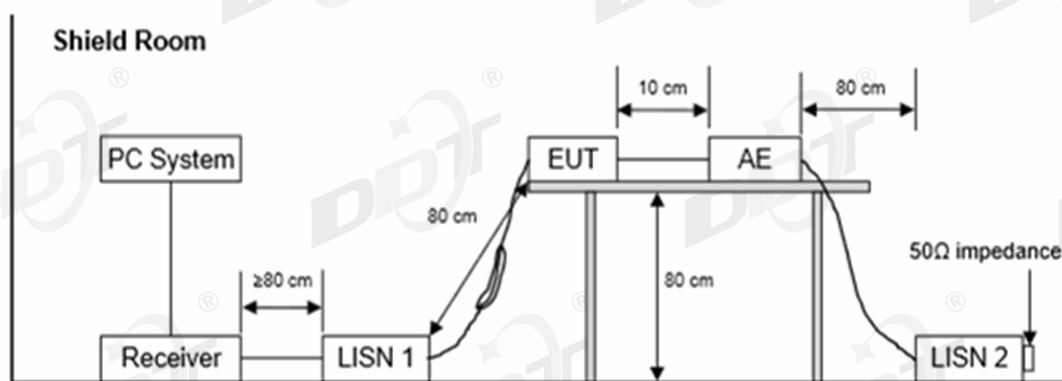

### 16.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 16.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

### 16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.



Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

## 16.6. Test result

### **PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

## 16.7. Test data

## TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25042508-1E\0904 CE.EM6  
Test Date : 2025-09-04 Tested By : Li Xiongbín  
EUT : Bluetooth Speaker Model Number : BANDBOX TRIO  
Power Supply : AC 120V/60Hz Test Mode : Tx mode  
Condition : TEMP:22.1°C, RH:61.2% LISN : 2025 1# 216/LINE  
Memo : Sample Number: S25042508-018 (Battery model: FG4CELL21201)

Data: 2

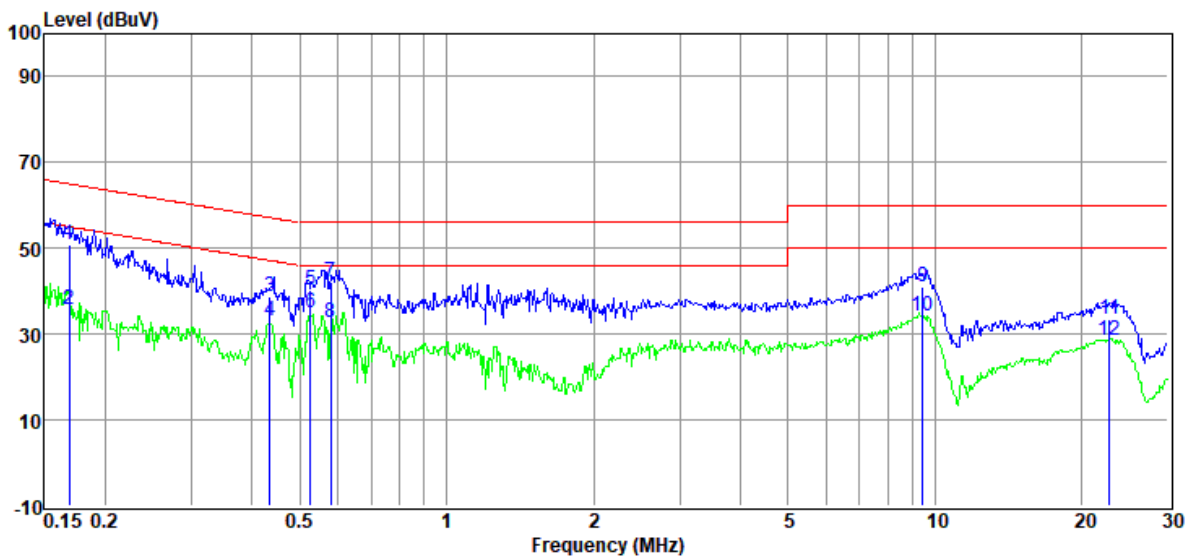

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	31.03	9.84	0.05	9.89	50.81	65.03	-14.22	QP	LINE
2	0.17	15.89	9.84	0.05	9.89	35.67	55.03	-19.36	Average	LINE
3	0.44	19.13	9.72	0.08	9.89	38.82	57.15	-18.33	QP	LINE
4	0.44	13.52	9.72	0.08	9.89	33.21	47.15	-13.94	Average	LINE
5	0.53	20.53	9.82	0.09	9.89	40.33	56.00	-15.67	QP	LINE
6	0.53	15.08	9.82	0.09	9.89	34.88	46.00	-11.12	Average	LINE
7	0.58	22.12	9.91	0.10	9.89	42.02	56.00	-13.98	QP	LINE
8	0.58	12.76	9.91	0.10	9.89	32.66	46.00	-13.34	Average	LINE
9	9.45	20.88	10.16	0.25	9.83	41.12	60.00	-18.88	QP	LINE
10	9.45	13.92	10.16	0.25	9.83	34.16	50.00	-15.84	Average	LINE
11	22.78	12.81	10.41	0.42	9.96	33.60	60.00	-26.40	QP	LINE
12	22.78	7.80	10.41	0.42	9.96	28.59	50.00	-21.41	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25042508-1E\0904 CE.EM6  
Test Date : 2025-09-04 Tested By : Li Xiongbín  
EUT : Bluetooth Speaker Model Number : BANDBOX TRIO  
Power Supply : AC 120V/60Hz Test Mode : Tx mode  
Condition : TEMP:22.1°C, RH:61.2% LISN : 2025 1# 216/NEUTRAL  
Memo : Sample Number: S25042508-018 (Battery model: FG4CELL21201)

Data: 4

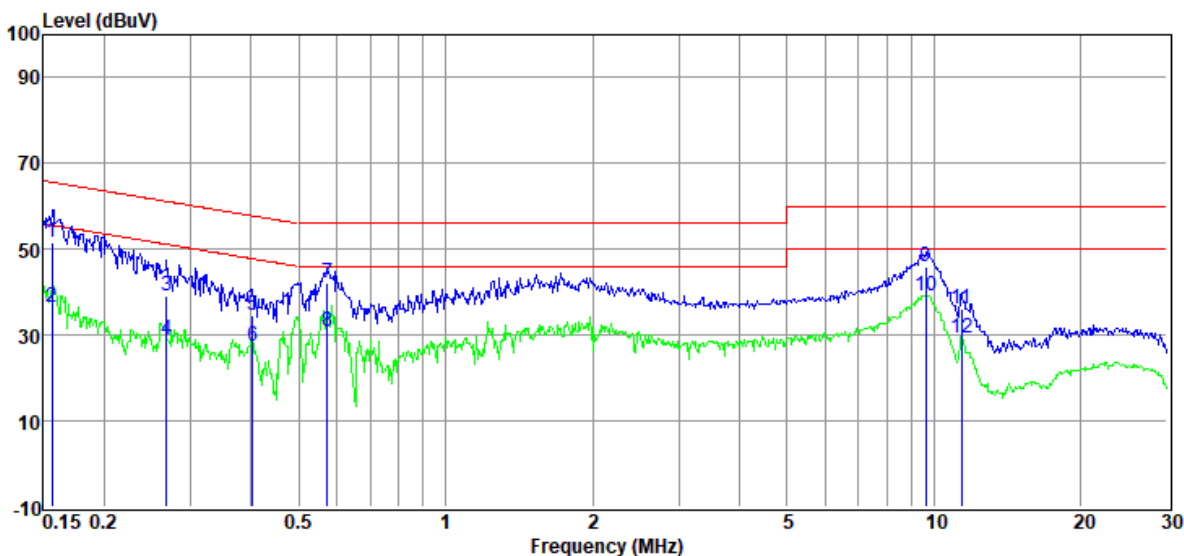

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	31.84	9.74	0.05	9.89	51.52	65.65	-14.13	QP	NEUTRAL
2	0.16	16.93	9.74	0.05	9.89	36.61	55.65	-19.04	Average	NEUTRAL
3	0.27	19.48	9.76	0.06	9.89	39.19	61.16	-21.97	QP	NEUTRAL
4	0.27	9.36	9.76	0.06	9.89	29.07	51.16	-22.09	Average	NEUTRAL
5	0.40	14.66	9.80	0.08	9.89	34.43	57.81	-23.38	QP	NEUTRAL
6	0.40	7.74	9.80	0.08	9.89	27.51	47.81	-20.30	Average	NEUTRAL
7	0.57	22.26	9.89	0.10	9.89	42.14	56.00	-13.86	QP	NEUTRAL
8	0.57	11.13	9.89	0.10	9.89	31.01	46.00	-14.99	Average	NEUTRAL
9	9.60	25.60	10.13	0.26	9.83	45.82	60.00	-14.18	QP	NEUTRAL
10	9.60	19.00	10.13	0.26	9.83	39.22	50.00	-10.78	Average	NEUTRAL
11	11.38	15.66	10.23	0.29	9.85	36.03	60.00	-23.97	QP	NEUTRAL
12	11.38	8.89	10.23	0.29	9.85	29.26	50.00	-20.74	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-1E\0904 CE.EM6**  
**Test Date** : 2025-09-04 **Tested By** : Li Xiongbín  
**EUT** : Bluetooth Speaker **Model Number** : BANDBOX TRIO  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx mode  
**Condition** : TEMP:22.1°C, RH:61.2% **LISN** : 2025 1# 216/NEUTRAL  
**Memo** : Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

Data: 22

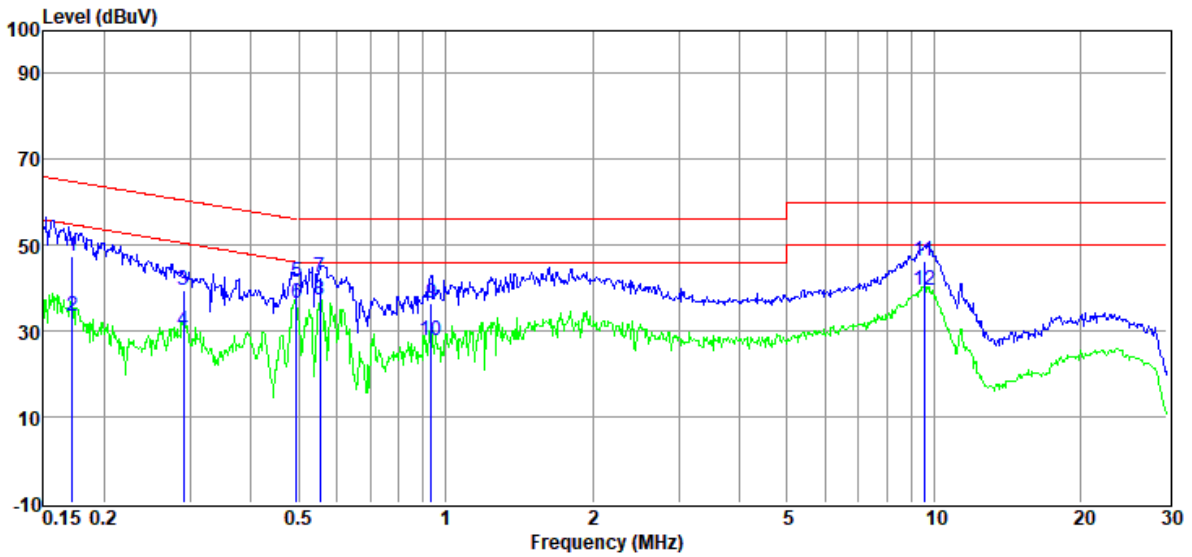

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	27.90	9.69	0.05	9.89	47.53	64.86	-17.33	QP	NEUTRAL
2	0.17	13.85	9.69	0.05	9.89	33.48	54.86	-21.38	Average	NEUTRAL
3	0.29	20.05	9.68	0.06	9.89	39.68	60.50	-20.82	QP	NEUTRAL
4	0.29	10.30	9.68	0.06	9.89	29.93	50.50	-20.57	Average	NEUTRAL
5	0.49	21.68	9.90	0.09	9.89	41.56	56.10	-14.54	QP	NEUTRAL
6	0.49	16.51	9.90	0.09	9.89	36.39	46.10	-9.71	Average	NEUTRAL
7	0.55	22.66	9.89	0.10	9.89	42.54	56.00	-13.46	QP	NEUTRAL
8	0.55	17.37	9.89	0.10	9.89	37.25	46.00	-8.75	Average	NEUTRAL
9	0.93	16.55	9.90	0.14	9.90	36.49	56.00	-19.51	QP	NEUTRAL
10	0.93	7.87	9.90	0.14	9.90	27.81	46.00	-18.19	Average	NEUTRAL
11	9.55	26.16	10.13	0.26	9.83	46.38	60.00	-13.62	QP	NEUTRAL
12	9.55	19.25	10.13	0.26	9.83	39.47	50.00	-10.53	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-1E\0904 CE.EM6**  
**Test Date** : 2025-09-04 **Tested By** : Li Xiongbín  
**EUT** : Bluetooth Speaker **Model Number** : BANDBOX TRIO  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx mode  
**Condition** : TEMP:22.1°C, RH:61.2% **LISN** : 2025 1# 216/LINE  
**Memo** : Sample Number: S25042508-019 (Battery model: FG4CELL21700GP)

Data: 24

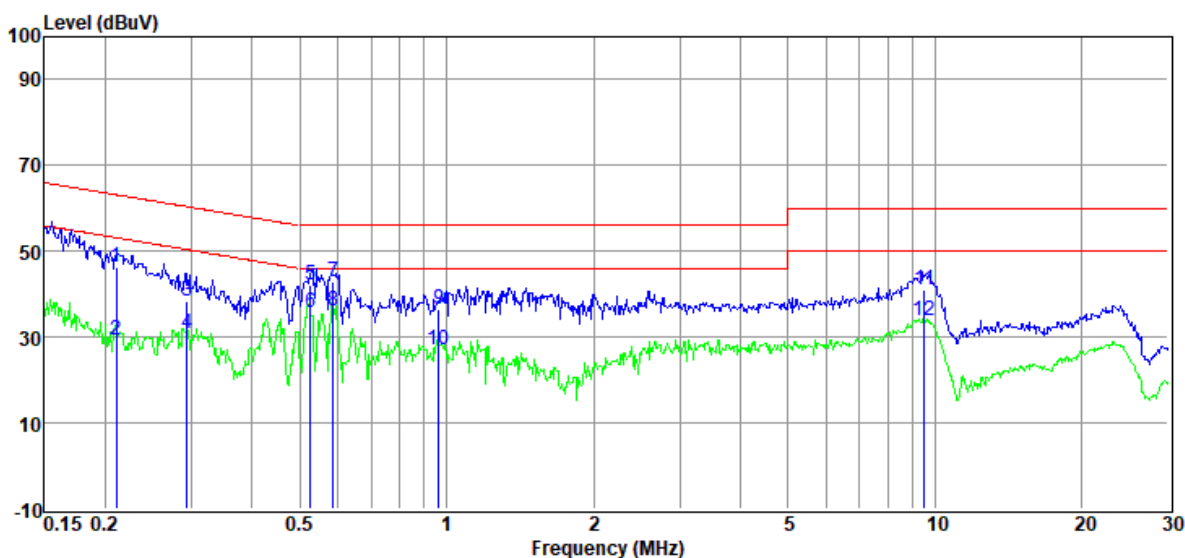



Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.21	26.46	9.82	0.06	9.89	46.23	63.18	-16.95	QP	LINE
2	0.21	9.63	9.82	0.06	9.89	29.40	53.18	-23.78	Average	LINE
3	0.29	18.58	9.71	0.06	9.89	38.24	60.41	-22.17	QP	LINE
4	0.29	11.03	9.71	0.06	9.89	30.69	50.41	-19.72	Average	LINE
5	0.53	22.26	9.82	0.09	9.89	42.06	56.00	-13.94	QP	LINE
6	0.53	16.08	9.82	0.09	9.89	35.88	46.00	-10.12	Average	LINE
7	0.59	23.02	9.92	0.10	9.89	42.93	56.00	-13.07	QP	LINE
8	0.59	16.32	9.92	0.10	9.89	36.23	46.00	-9.77	Average	LINE
9	0.96	16.37	9.93	0.15	9.90	36.35	56.00	-19.65	QP	LINE
10	0.96	7.16	9.93	0.15	9.90	27.14	46.00	-18.86	Average	LINE
11	9.50	20.66	10.16	0.25	9.83	40.90	60.00	-19.10	QP	LINE
12	9.50	13.59	10.16	0.25	9.83	33.83	50.00	-16.17	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



## 17. Test Setup Photograph

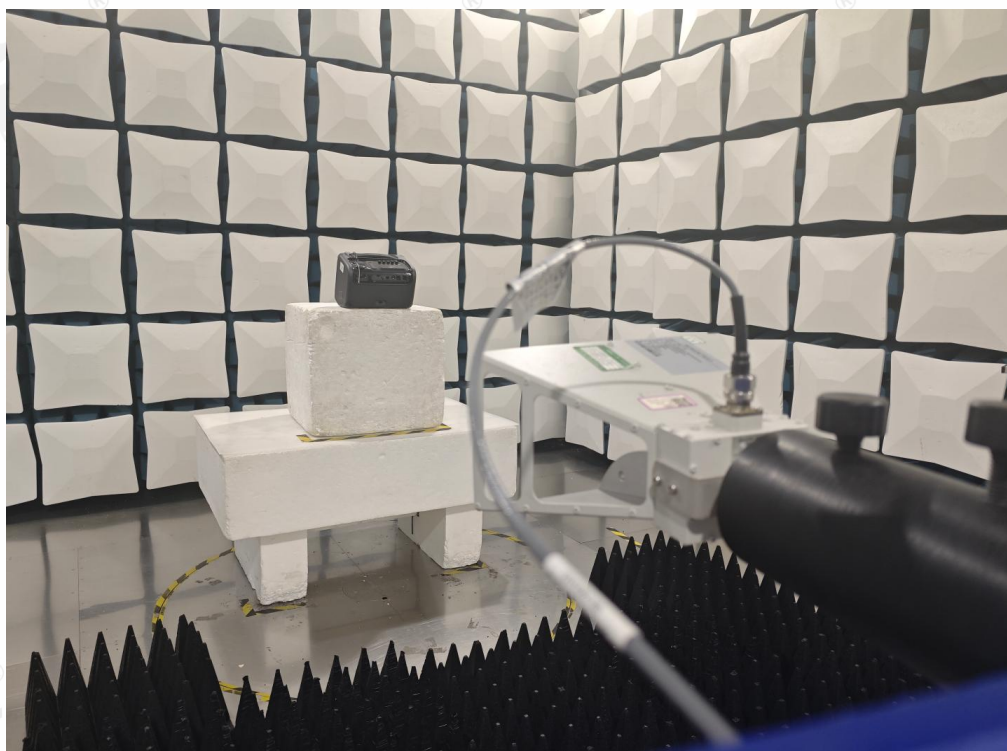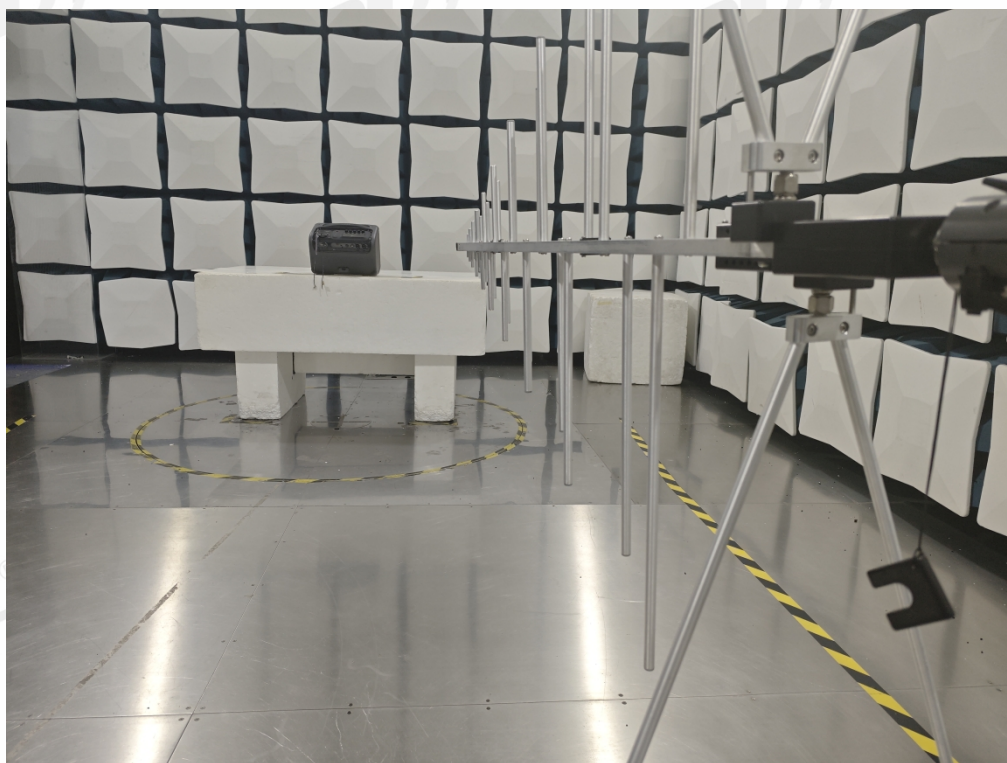





## 18. Photos of the EUT

Please refer to DDT-Q25042508-2E appendix I

-----End Report-----