



FCC AND ISCED SDoC TEST REPORT

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Bluetooth Speaker
Model No.	:	BANDBOX TRIO
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart B ANSI C63.4:2014 ANSI C63.4a-2017 ICES-003 Issue 7 ICES-GEN Issue 2
Report No.	:	DDT-RE25042508-2E01
Issue Date	:	2025/10/13
Issued By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents




1.	Summary of Test Results	5
2.	General Test Information.....	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	6
2.3.	Block diagram EUT configuration for test.....	7
2.4.	Decision of final test mode	13
2.5.	Deviations of test standard	14
2.6.	Test environment conditions	14
2.7.	Test laboratory	14
2.8.	Measurement uncertainty	15
3.	AC Power Port Conducted Emission.....	16
3.1.	Test equipment.....	16
3.2.	Block diagram of test setup	16
3.3.	Limits	17
3.4.	Assistant equipment used for test	18
3.5.	Test procedure	18
3.6.	Test result.....	19
3.7.	Test data	20
3.8.	Test photo	100
4.	Radiated Emissions Test.....	101
4.1.	Test equipment.....	101
4.2.	Block diagram of test setup	101
4.3.	Limits	104
4.4.	Assistant equipment used for test	105
4.5.	Test procedure	105
4.6.	Test result.....	106
4.7.	Test data	107
4.8.	Test photo	291
5.	Sample photos	293

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Bluetooth Speaker
Model No.	:	BANDBOX TRIO

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart B
ANSI C63.4:2014
ANSI C63.4a-2017
ICES-003 Issue 7
ICES-GEN Issue 2

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25042508-2E01		
Date of Receipt:	2025/06/06	Date of Test:	2025/06/06-2025/09/05
Created: Lori Mi	Reviewed: Caesar Peng	Approved: Damon Hu	
			
2025/09/19	2025/10/13	2025/10/13	

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/10/13	Damon Hu

1. Summary of Test Results

EMISSION (EMI)			
Description of Test Item	Standard	Result	Memo
AC Power Port Conducted Emission	FCC Rules and Regulations Part 15 Subpart B, ANSI C63.4:2014, ANSI C63.4a-2017, ICES-003 Issue 7, ICES-GEN Issue 2	PASS	/
Antenna Power Conduction Measurement for Antenna port of Receivers	FCC Rules and Regulations Part 15 Subpart B, ANSI C63.4:2014, ANSI C63.4a-2017, ICES-003 Issue 7, ICES-GEN Issue 2	N/A	Only for antenna port
Radiated Emissions Test	FCC Rules and Regulations Part 15 Subpart B, ANSI C63.4:2014, ANSI C63.4a-2017, ICES-003 Issue 7, ICES-GEN Issue 2	PASS	/

Note 1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: For the EMI measurements have made the EUT operated in a mode producing the highest emission level, and attempted to vary the configuration of the EUT radiated the highest emission. For the EMS measurements have made the EUT operated in the most sensitive mode.

2. General Test Information

2.1. Description of EUT

EUT* Name	: Bluetooth Speaker
Model Number	: BANDBOX TRIO
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC Input: AC 100-240V ~ 50/60Hz, 100W DC Input: DC 5V/12V/15V/20V 3.0A from external AC Adapter Internal battery: DC 7.2V 9444mAh Polymer Li-ion built-in battery
EUT Class (Only For EMI)	: Class B
Maximum Work Frequency	: 2483.5MHz
Sample Number	: S25042508-015

Note 1: EUT is the abbreviation of equipment under test.

Note 2: “☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

Note 3: Equipment meeting Class A requirements may not offer adequate protection to broadcast services within a residential environment; The Class B requirements for equipment are intended to offer adequate protection to broadcast services within the residential environment. Equipment compliant with the class A requirements should have a warning notice in the user manual stating that it could cause radio interference. For example, Warning: Operation of this equipment in a residential environment could cause radio interference.

Note 4: The accessories of this product are only power cables, and the length of other signal cables and control cables used during the test is less than 3 meters.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description	Remark
AC cable	Harman	N/A	Length: 2.0 m	N/A
Rechargeable Li-ion Battery Pack	Guangdong Pow-Tech New Power Co.,Ltd.	FG4CELL21201	Rated Capacity: 9444mAh Nominal Energy: 68 Wh Nominal Voltage: 7.2 V	Optional
Rechargeable Li-ion Battery Pack	GREAT POWER BATTERY CO., LTD	FG4CELL21700GP	Rated Capacity: 9444mAh Nominal Energy: 68 Wh Nominal Voltage: 7.2 V	Optional

Note:

The prototype has a mixed shipment of two cells, and this report takes First: FG4CELL21201 as the main test sample, and Second: FG4CELL21700GP as the report for verification, according to the engineering judgment, only a few poor modes need to be tested.

Test mode of FG4CELL21700GP:

Mode 1:Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode;

Mode 3:Charging + Aux in + Earphone + 5V/1A load + MIC*2 + Guitar mode;

Mode 4:Charging + Bluetooth + Earphone + TWS + 5V/1A load + MIC*2 + Guitar mode;


Mode 16:Charging + Bluetooth + TWS + 5V/1A load + MIC*2 + Guitar mode;

Mode 17:Adapter charging + Aux in + MIC*2 + Guitar mode


Mode 18:Adapter charging + Bluetooth + TWS + MIC*2 + Guitar mode

2.3. Block diagram EUT configuration for test


Mode 1:Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode

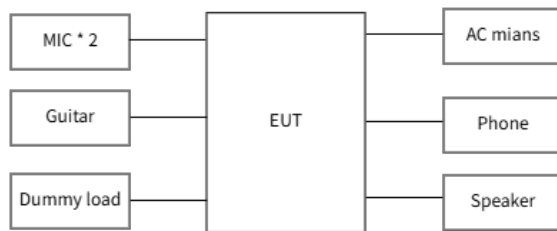


Mode 2:Bluetooth + TWS + 5V/1A load + MIC*2 + Guitar mode

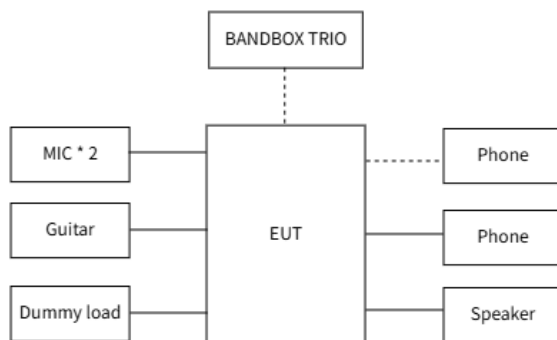


Mode 3:Charging + Aux in + Earphone + 5V/1A load + MIC*2 + Guitar mode

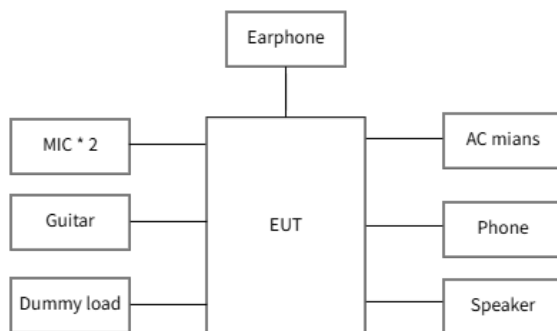


Mode 4:Charging + Bluetooth + Earphone + TWS + 5V/1A load + MIC*2 + Guitar mode

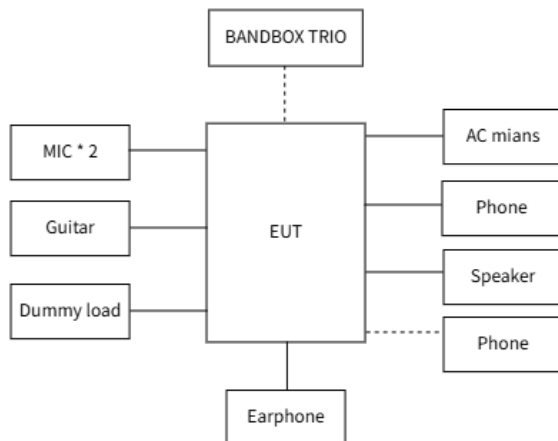


Mode 5:Charging + Laptop USB Audio + Earphone + MIC*2 + Guitar mode

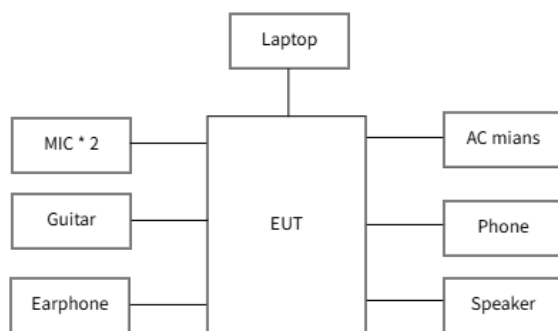


Mode 6:Charging + USB disk Audio + MIC*2 + Guitar mode

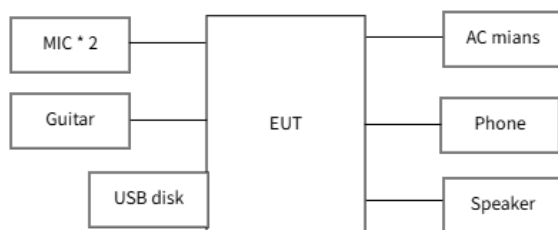


Mode 7:USB disk Audio + MIC*2 + Guitar mode

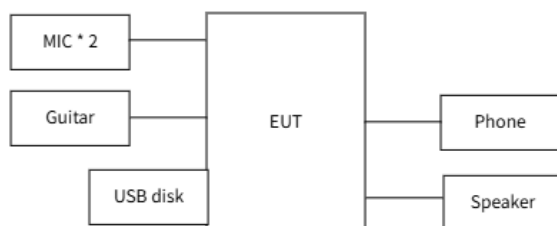


Mode 8:Charging + 5V/3A load + MIC*2 + Guitar mode

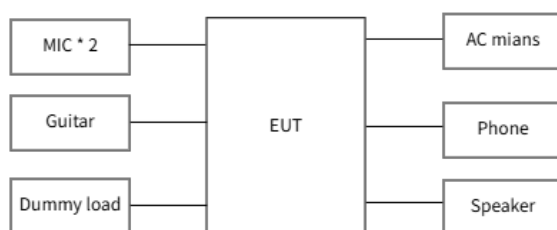


Mode 9:Aux in + 5V/1A load + MIC*2 + Guitar mode

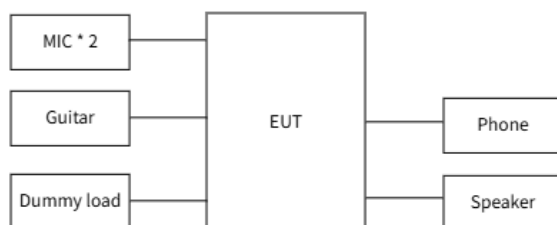


Mode 10:Charging + Bluetooth + 5V/1A load + MIC*2 + Guitar mode

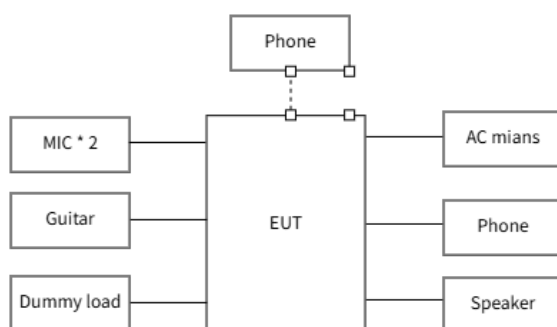


Mode 11:Bluetooth + 5V/1A load + MIC*2 + Guitar mode

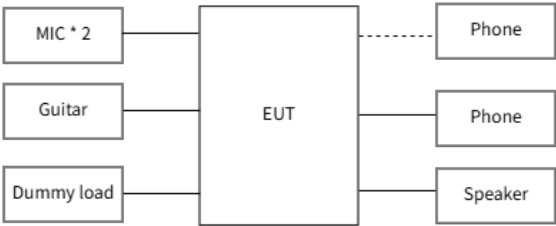


Mode 12:Charging + Phone USB Audio + MIC*2 + Guitar mode

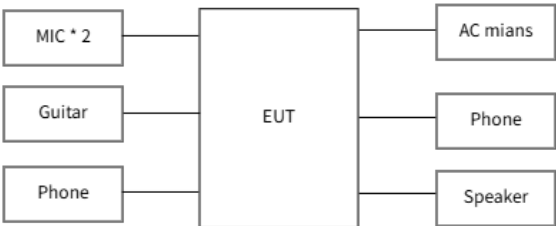


Mode 13:Phone USB Audio + MIC*2 + Guitar mode

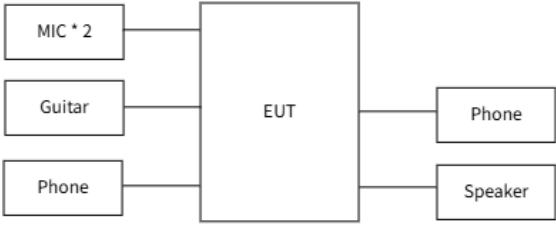


Mode 14:Charging + Laptop USB Audio + MIC*2 + Guitar mode

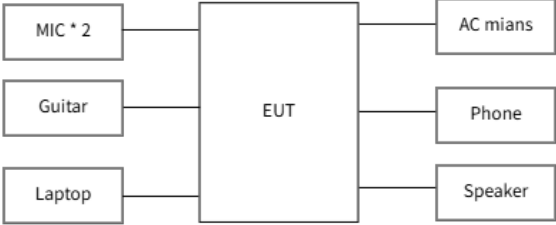


Mode 15:Laptop USB Audio + MIC*2 + Guitar mode

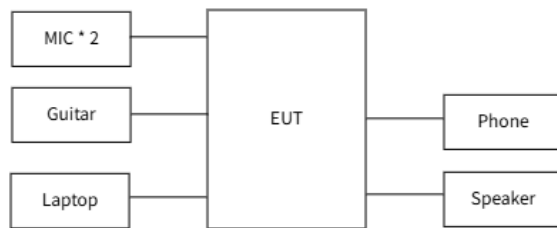


Mode 16:Charging + Bluetooth + TWS + 5V/1A load + MIC*2 + Guitar mode

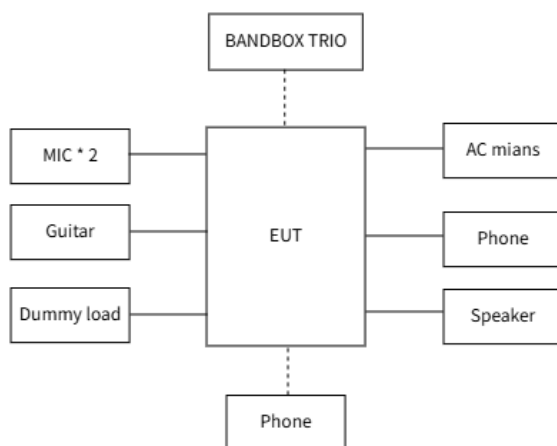


Mode 17:Adapter charging + Aux in + MIC*2 + Guitar mode

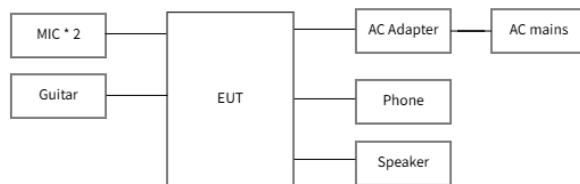


Mode 18: Adapter charging + Bluetooth + TWS + MIC*2 + Guitar mode

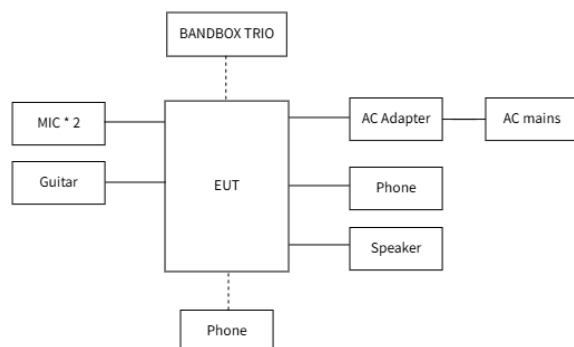

Mode 19: Adapter charging + Aux in + Earphone + MIC*2 + Guitar mode

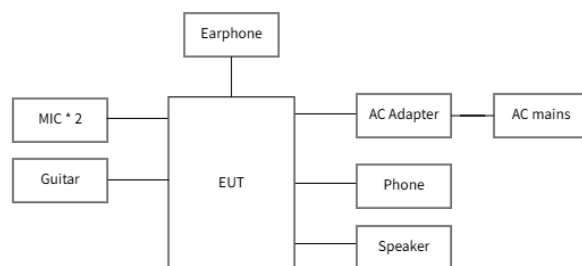

Mode 20: Adapter charging + Bluetooth + Earphone + TWS + MIC*2 + Guitar mode

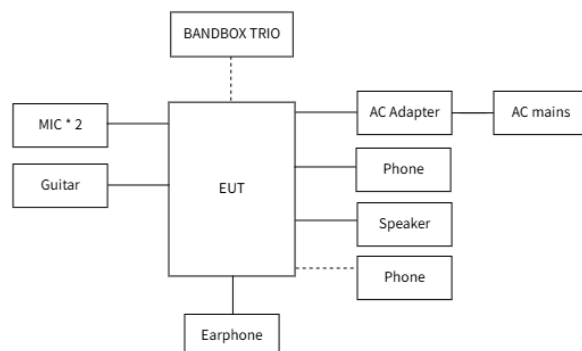

Test mode description: According to the manufacturer's requirements, Laptop, phone or USB disk playing 1kHz sine audio signal and input to EUT.

Note: According exploration test, adjust the volume of EUT radiated the maximum emissions.

After the pre-test, it was found that the guitar was worse than the MIC, so the final test was connected to the guitar for testing and the data was recorded in the report.

2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below.

Emission	AC Power Port Conducted Emission	<p>Mode 1: Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 3: Charging + Aux in + Earphone + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 4: Charging + Bluetooth + Earphone + TWS + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 5: Charging + Laptop USB Audio + Earphone + MIC*2 + Guitar mode</p> <p>Mode 6: Charging + USB disk Audio + MIC*2 + Guitar mode</p> <p>Mode 8: Charging + 5V/3A load + MIC*2 + Guitar mode</p> <p>Mode 10: Charging + Bluetooth + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 12: Charging + Phone USB Audio + MIC*2 + Guitar mode</p> <p>Mode 14: Charging + Laptop USB Audio + MIC*2 + Guitar mode</p> <p>Mode 16: Charging + Bluetooth + TWS + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 17: Adapter charging + Aux in + MIC*2 + Guitar mode</p> <p>Mode 18: Adapter charging + Bluetooth + TWS + MIC*2 + Guitar mode</p> <p>Mode 19: Adapter charging + Aux in + Earphone + MIC*2 + Guitar mode</p> <p>Mode 20: Adapter charging + Bluetooth + Earphone + TWS + MIC*2 + Guitar mode</p>
	Radiated Emissions Test	<p>Mode 1: Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 4: Charging + Bluetooth + Earphone + TWS + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 5: Charging + Laptop USB Audio + Earphone + MIC*2 + Guitar mode</p> <p>Mode 6: Charging + USB disk Audio + MIC*2 + Guitar mode</p> <p>Mode 7: USB disk Audio + MIC*2 + Guitar mode</p> <p>Mode 8: Charging + 5V/3A load + MIC*2 + Guitar mode</p> <p>Mode 9: Aux in + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 10: Charging + Bluetooth + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 11: Bluetooth + 5V/1A load + MIC*2 + Guitar mode</p> <p>Mode 12: Charging + Phone USB Audio + MIC*2 + Guitar mode</p>

		Mode 13: Phone USB Audio + MIC*2 + Guitar mode Mode 14: Charging + Laptop USB Audio + MIC*2 + Guitar mode Mode 15: Laptop USB Audio + MIC*2 + Guitar mode Mode 16: Charging + Bluetooth + TWS + 5V/1A load + MIC*2 + Guitar mode Mode 17: Adapter charging + Aux in + MIC*2 + Guitar mode Mode 18: Adapter charging + Bluetooth + TWS + MIC*2 + Guitar mode Mode 19: Adapter charging + Aux in + Earphone + MIC*2 + Guitar mode Mode 2: Bluetooth + TWS + 5V/1A load + MIC*2 + Guitar mode Mode 20: Adapter charging + Bluetooth + Earphone + TWS + MIC*2 + Guitar mode Mode 3: Charging + Aux in + Earphone + 5V/1A load + MIC*2 + Guitar mode
--	--	--

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	20-25°C
Humidity range:	40-75%
Pressure range:	86-106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118


2.8. Measurement uncertainty

Test Item	Uncertainty
Conducted disturbance at mains terminals	1#: 3.72dB (9 kHz to 150 kHz), 3.34dB (150 kHz to 30 MHz)
	2#: 3.75dB (9 kHz to 150 kHz), 3.39dB (150 kHz to 30 MHz)
	3#: 3.78dB (9 kHz to 150 kHz), 3.37dB (150 kHz to 30 MHz)
Uncertainty for telecommunication port conduction emission test	1#: AAN with aLCL = 55 ... 40 dBc: 3.64 dB AAN with aLCL = 65 ... 50 dBc: 4.08 dB AAN with aLCL = 75 ... 60 dBc: 4.56 dB
	2#: AAN with aLCL = 55 ... 40 dBc: 3.82 dB AAN with aLCL = 65 ... 50 dBc: 3.96 dB AAN with aLCL = 75 ... 60 dBc: 4.12 dB
Uncertainty for radiation emission test (30 MHz-1 GHz)	1#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	2#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	3#: 4.96 dB (Antenna Polarize: V) 4.98 dB (Antenna Polarize: H)
	10m: 4.48 dB (Antenna Polarize: V) 4.64 dB (Antenna Polarize: H)
Uncertainty for radiation disturbance test (1 GHz to 6 GHz)	1#: 4.10 dB (1-6 GHz)
	3#: 4.54 dB (1-6 GHz)
Uncertainty for Flicker test	0.2%
Uncertainty for Harmonic test	5%
Uncertainty for Electrostatic discharge	Rise time: 4% Peak current: 3.1% Current at 30 ns: 3.1% Current at 60 ns: 3.1%
Uncertainty for Surge	Peak of the open-circuit voltage impulse: 3% Front time of the open-circuit voltage impulse: 5% Width of the open-circuit voltage impulse: 5% Peak of the short-circuit current impulse: 2.7% Front time of the short-circuit current impulse: 5% Duration of the short-circuit current impulse: 3%
Uncertainty for Electrical fast transients	Voltage rise time: 3.7% Peak voltage value: 3.4% Voltage pulse width: 3.7%
Uncertainty for Continuous conducted disturbances	0.25dB
Uncertainty for Continuous radio frequency disturbances	1.12dB
Uncertainty for Power-frequency magnetic fields	10%
Uncertainty for Voltage dips and interruptions	3.7%
Temperature	0.4 °C
Humidity	2%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/


For floor standing equipment

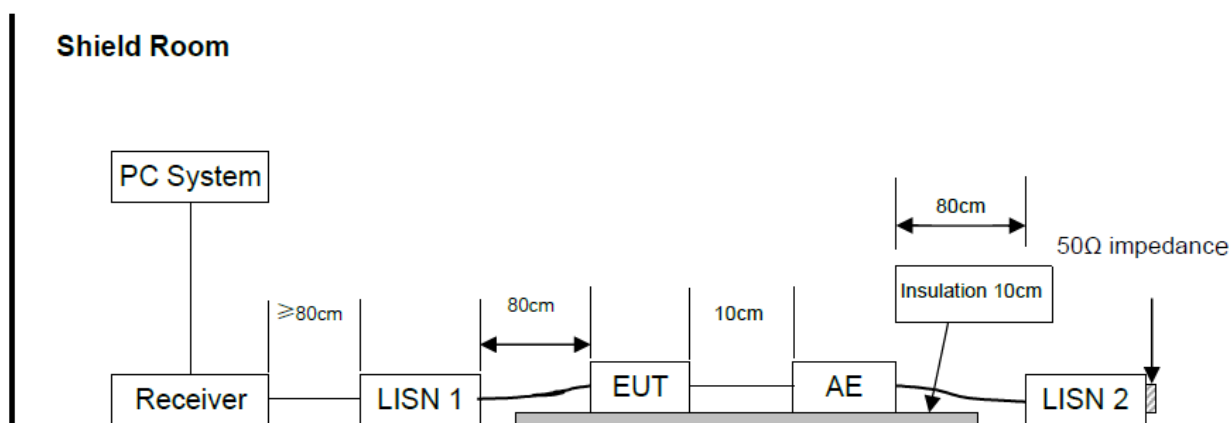

For combinations equipment

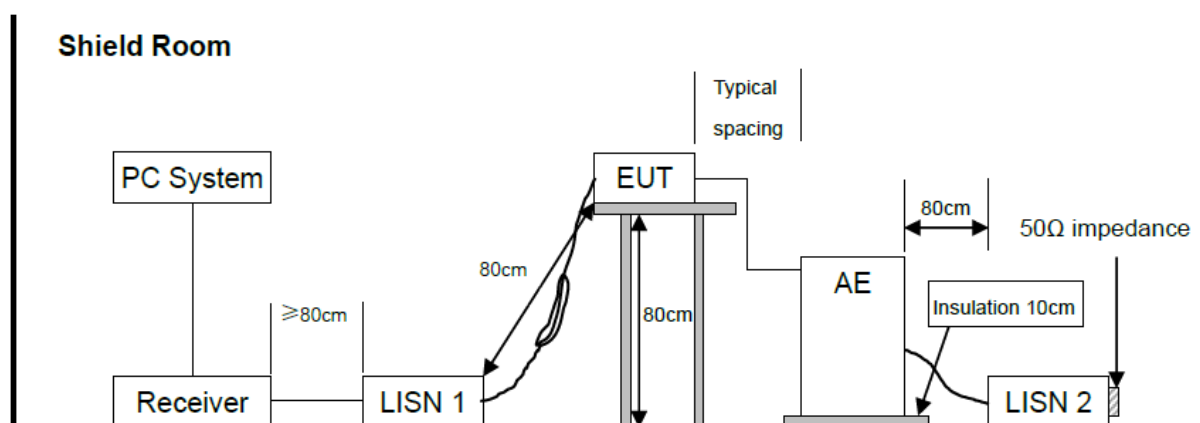

For table-top equipment

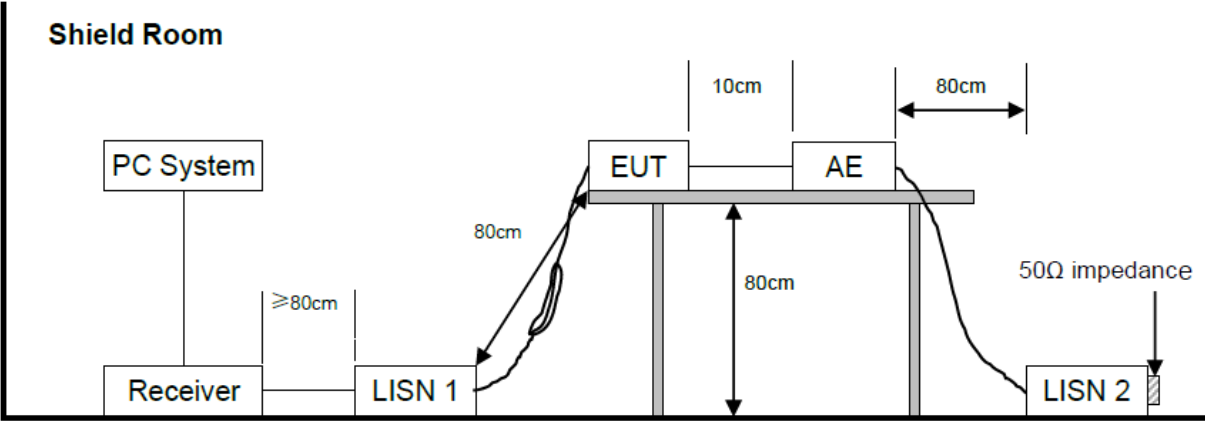

3.3. Limits

Class A		
Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	79	66
500 kHz~30 MHz	73	60
Class B		
Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Notes:

1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Mobile phone	HUAWEI	MATE 20	N/A	N/A
Mobile phone	Apple	iPhone 15	N/A	N/A
Guitar	Fender electric guitar	N/A	ICSH20027765	N/A
AUX IN cable	N/A	N/A	Length: 1.00m, unshielded, non-magnetic ring	N/A
USB Cable	N/A	N/A	Length: 1.00m, unshielded, non-magnetic ring	N/A
Load	N/A	N/A	1.66/5 Ω	N/A
USB Flash	Kingston	DT101 G2	N/A	N/A
Bluetooth Speaker	Harman	BANDBOX TRIO	N/A	N/A
MIC	N/A	N/A	N/A	N/A
Laptop	HP	HP ZHAN 66 Pro A 14 G5	HP notebooks	N/A
Earphone	N/A	N/A	N/A	N/A
Speaker	N/A	N/A	N/A	N/A
Adapter	HUAWEI	HW-100400C01 JB91L6L7S0403 1	N/A	N/A

3.5. Test procedure

The EUT and Support equipment placement requires reference to the test block diagram and is placed on a non-metallic table.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

3.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.


Note 2: "----" means Peak detection; "----" means Average detection.

3.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Test Date : 2025-08-21 Tested By : Alex Liu
EUT : Bluetooth Speaker Model Number : BANDBOX TRIO
Power Supply : AC 240V/50Hz Test Mode : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% LISN : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 2

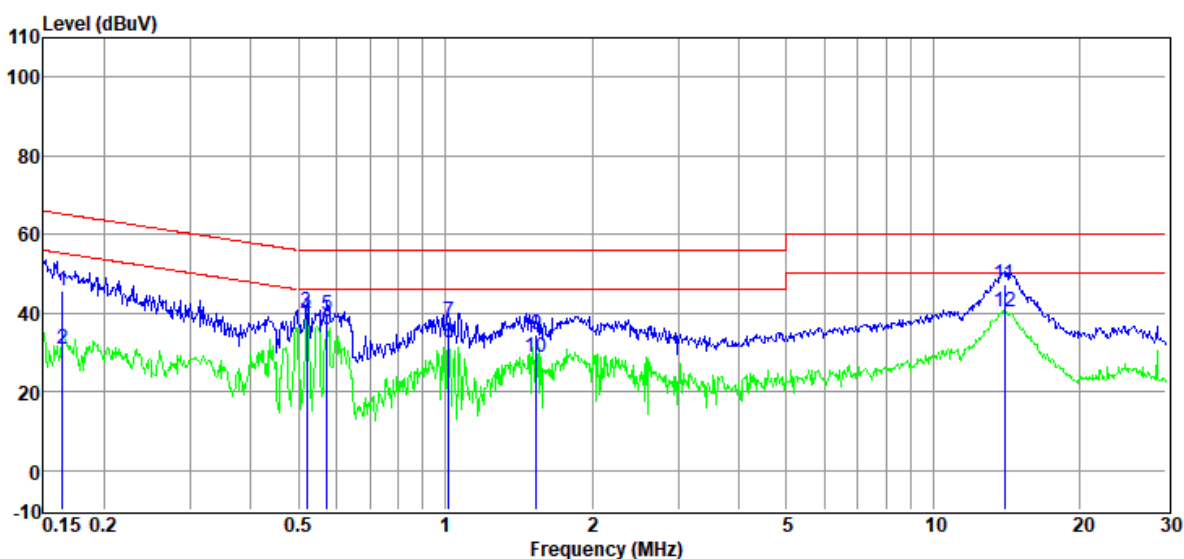

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	25.89	9.71	0.05	9.86	45.51	65.25	-19.74	QP	NEUTRAL
2	0.16	11.25	9.71	0.05	9.86	30.87	55.25	-24.38	Average	NEUTRAL
3	0.52	20.65	9.90	0.09	9.86	40.50	56.00	-15.50	QP	NEUTRAL
4	0.52	19.16	9.90	0.09	9.86	39.01	46.00	-6.99	Average	NEUTRAL
5	0.57	19.69	9.89	0.10	9.86	39.54	56.00	-16.46	QP	NEUTRAL
6	0.57	15.89	9.89	0.10	9.86	35.74	46.00	-10.26	Average	NEUTRAL
7	1.02	17.81	9.94	0.15	9.88	37.78	56.00	-18.22	QP	NEUTRAL
8	1.02	12.43	9.94	0.15	9.88	32.40	46.00	-13.60	Average	NEUTRAL
9	1.54	14.68	9.83	0.16	9.87	34.54	56.00	-21.46	QP	NEUTRAL
10	1.54	8.78	9.83	0.16	9.87	28.64	46.00	-17.36	Average	NEUTRAL
11	13.99	26.71	10.33	0.33	9.94	47.31	60.00	-12.69	QP	NEUTRAL
12	13.99	19.55	10.33	0.33	9.94	40.15	50.00	-9.85	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 4

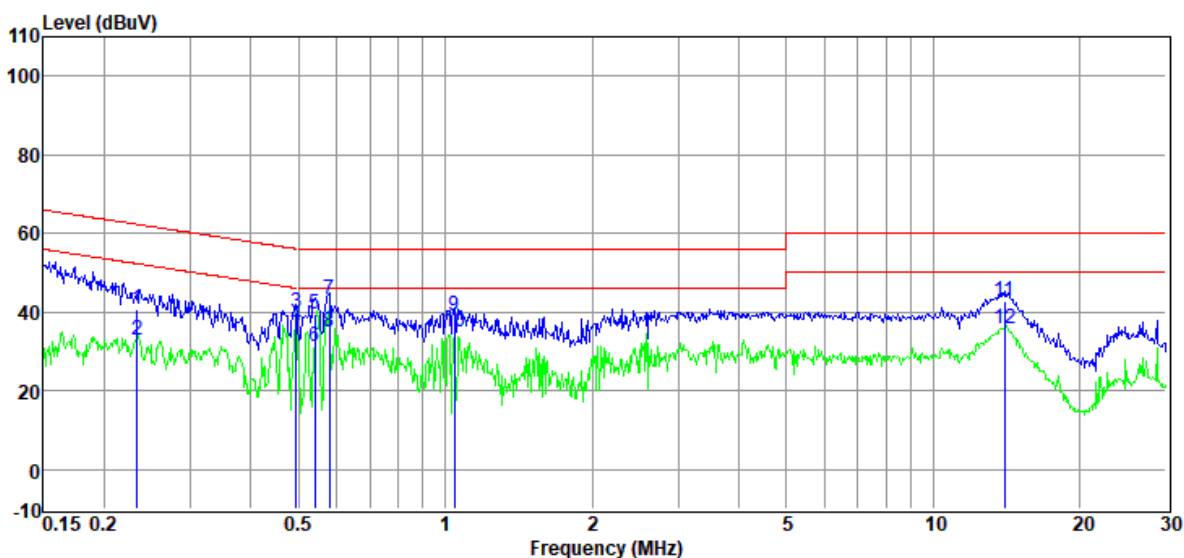

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.23	21.07	9.82	0.06	9.86	40.81	62.30	-21.49	QP	LINE
2	0.23	13.22	9.82	0.06	9.86	32.96	52.30	-19.34	Average	LINE
3	0.49	20.16	9.77	0.09	9.86	39.88	56.10	-16.22	QP	LINE
4	0.49	16.90	9.77	0.09	9.86	36.62	46.10	-9.48	Average	LINE
5	0.54	19.77	9.84	0.10	9.86	39.57	56.00	-16.43	QP	LINE
6	0.54	11.45	9.84	0.10	9.86	31.25	46.00	-14.75	Average	LINE
7	0.58	23.31	9.91	0.10	9.86	43.18	56.00	-12.82	QP	LINE
8	0.58	15.15	9.91	0.10	9.86	35.02	46.00	-10.98	Average	LINE
9	1.04	19.22	9.96	0.15	9.88	39.21	56.00	-16.79	QP	LINE
10	1.04	14.95	9.96	0.15	9.88	34.94	46.00	-11.06	Average	LINE
11	13.99	22.14	10.29	0.33	9.94	42.70	60.00	-17.30	QP	LINE
12	13.99	15.18	10.29	0.33	9.94	35.74	50.00	-14.26	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 6

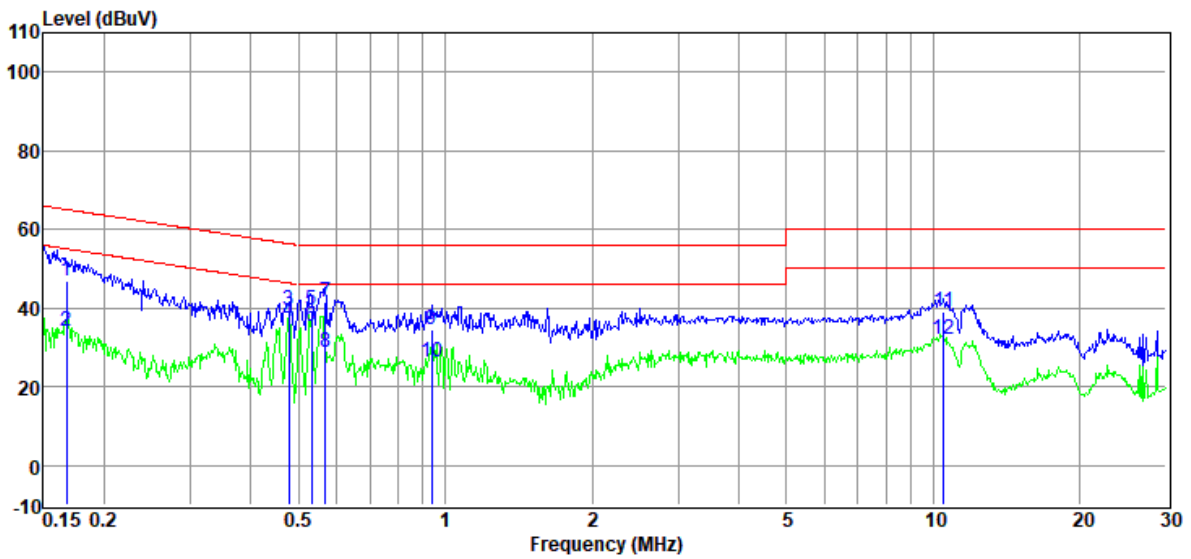

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	27.09	9.84	0.05	9.86	46.84	65.08	-18.24	QP	LINE
2	0.17	14.39	9.84	0.05	9.86	34.14	55.08	-20.94	Average	LINE
3	0.48	19.64	9.75	0.09	9.86	39.34	56.36	-17.02	QP	LINE
4	0.48	16.92	9.75	0.09	9.86	36.62	46.36	-9.74	Average	LINE
5	0.53	19.89	9.83	0.10	9.86	39.68	56.00	-16.32	QP	LINE
6	0.53	15.76	9.83	0.10	9.86	35.55	46.00	-10.45	Average	LINE
7	0.57	21.88	9.89	0.10	9.86	41.73	56.00	-14.27	QP	LINE
8	0.57	9.06	9.89	0.10	9.86	28.91	46.00	-17.09	Average	LINE
9	0.94	14.77	9.90	0.14	9.88	34.69	56.00	-21.31	QP	LINE
10	0.94	6.55	9.90	0.14	9.88	26.47	46.00	-19.53	Average	LINE
11	10.51	18.48	10.21	0.27	9.97	38.93	60.00	-21.07	QP	LINE
12	10.51	11.81	10.21	0.27	9.97	32.26	50.00	-17.74	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 8

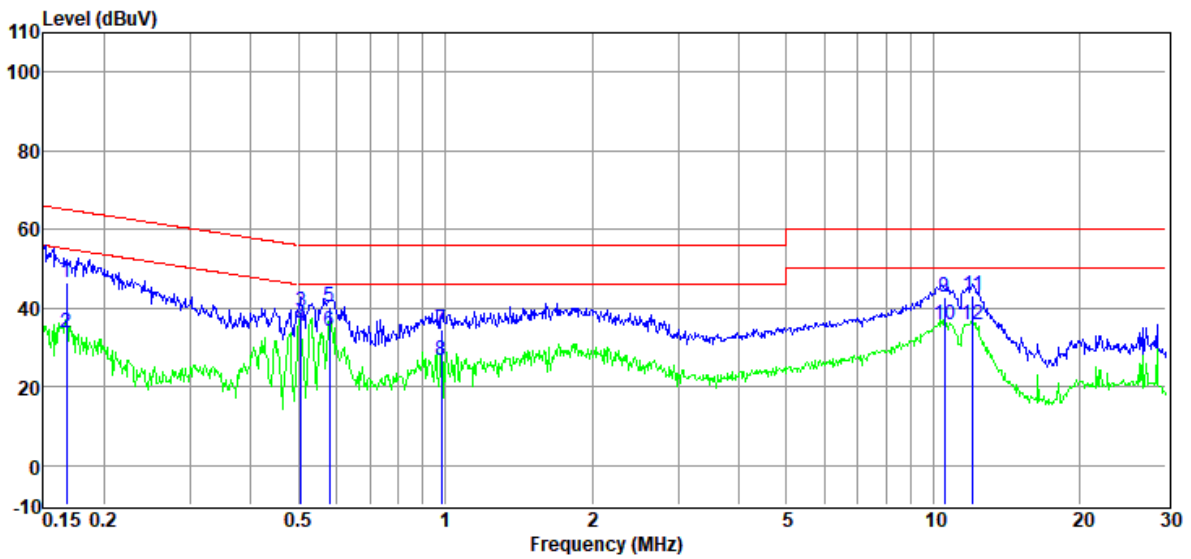

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	26.88	9.69	0.05	9.86	46.48	65.08	-18.60	QP	NEUTRAL
2	0.17	14.09	9.69	0.05	9.86	33.69	55.08	-21.39	Average	NEUTRAL
3	0.51	19.04	9.91	0.09	9.86	38.90	56.00	-17.10	QP	NEUTRAL
4	0.51	15.57	9.91	0.09	9.86	35.43	46.00	-10.57	Average	NEUTRAL
5	0.58	20.33	9.89	0.10	9.86	40.18	56.00	-15.82	QP	NEUTRAL
6	0.58	14.29	9.89	0.10	9.86	34.14	46.00	-11.86	Average	NEUTRAL
7	0.98	14.40	9.93	0.15	9.88	34.36	56.00	-21.64	QP	NEUTRAL
8	0.98	6.81	9.93	0.15	9.88	26.77	46.00	-19.23	Average	NEUTRAL
9	10.56	22.33	10.20	0.27	9.97	42.77	60.00	-17.23	QP	NEUTRAL
10	10.56	15.45	10.20	0.27	9.97	35.89	50.00	-14.11	Average	NEUTRAL
11	12.06	22.55	10.26	0.30	9.96	43.07	60.00	-16.93	QP	NEUTRAL
12	12.06	15.38	10.26	0.30	9.96	35.90	50.00	-14.10	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth speake **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 10

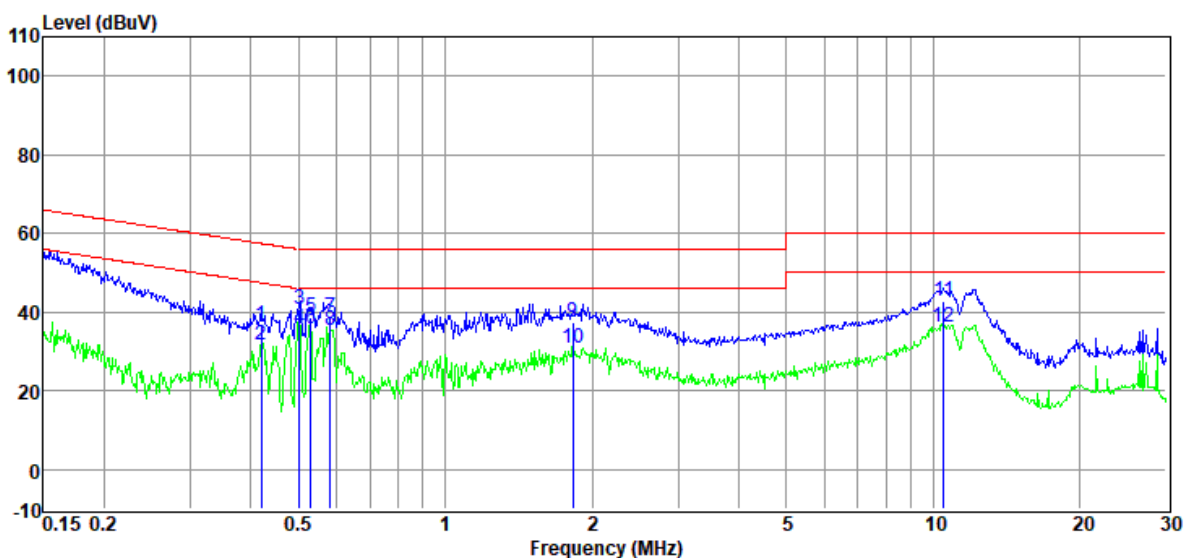

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.42	16.83	9.82	0.08	9.86	36.59	57.46	20.87	QP	NEUTRAL
2	0.42	11.93	9.82	0.08	9.86	31.69	47.46	15.77	Average	NEUTRAL
3	0.50	20.66	9.91	0.09	9.86	40.52	56.00	15.48	QP	NEUTRAL
4	0.50	15.96	9.91	0.09	9.86	35.82	46.00	10.18	Average	NEUTRAL
5	0.53	18.75	9.90	0.09	9.86	38.60	56.00	17.40	QP	NEUTRAL
6	0.53	15.85	9.90	0.09	9.86	35.70	46.00	10.30	Average	NEUTRAL
7	0.58	18.67	9.88	0.10	9.86	38.51	56.00	17.49	QP	NEUTRAL
8	0.58	15.68	9.88	0.10	9.86	35.52	46.00	10.48	Average	NEUTRAL
9	1.83	17.74	9.78	0.17	9.87	37.56	56.00	18.44	QP	NEUTRAL
10	1.83	10.84	9.78	0.17	9.87	30.66	46.00	15.34	Average	NEUTRAL
11	10.51	22.34	10.19	0.27	9.97	42.77	60.00	17.23	QP	NEUTRAL
12	10.51	15.69	10.19	0.27	9.97	36.12	50.00	13.88	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 12

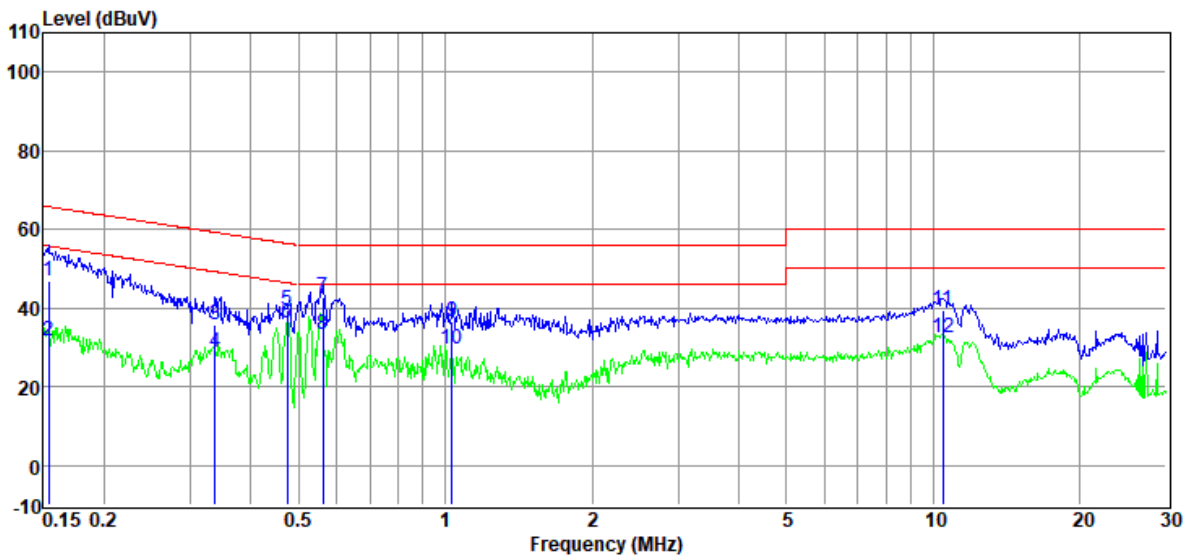

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	27.22	9.85	0.05	9.86	46.98	65.78	-18.80	QP	LINE
2	0.15	11.71	9.85	0.05	9.86	31.47	55.78	-24.31	Average	LINE
3	0.34	16.21	9.67	0.07	9.86	35.81	59.27	-23.46	QP	LINE
4	0.34	9.09	9.67	0.07	9.86	28.69	49.27	-20.58	Average	LINE
5	0.47	19.98	9.75	0.09	9.86	39.68	56.45	-16.77	QP	LINE
6	0.47	16.35	9.75	0.09	9.86	36.05	46.45	-10.40	Average	LINE
7	0.56	22.78	9.88	0.10	9.86	42.62	56.00	-13.38	QP	LINE
8	0.56	13.27	9.88	0.10	9.86	33.11	46.00	-12.89	Average	LINE
9	1.03	16.49	9.96	0.15	9.88	36.48	56.00	-19.52	QP	LINE
10	1.03	9.47	9.96	0.15	9.88	29.46	46.00	-16.54	Average	LINE
11	10.45	19.11	10.21	0.27	9.97	39.56	60.00	-20.44	QP	LINE
12	10.45	12.22	10.21	0.27	9.97	32.67	50.00	-17.33	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 14

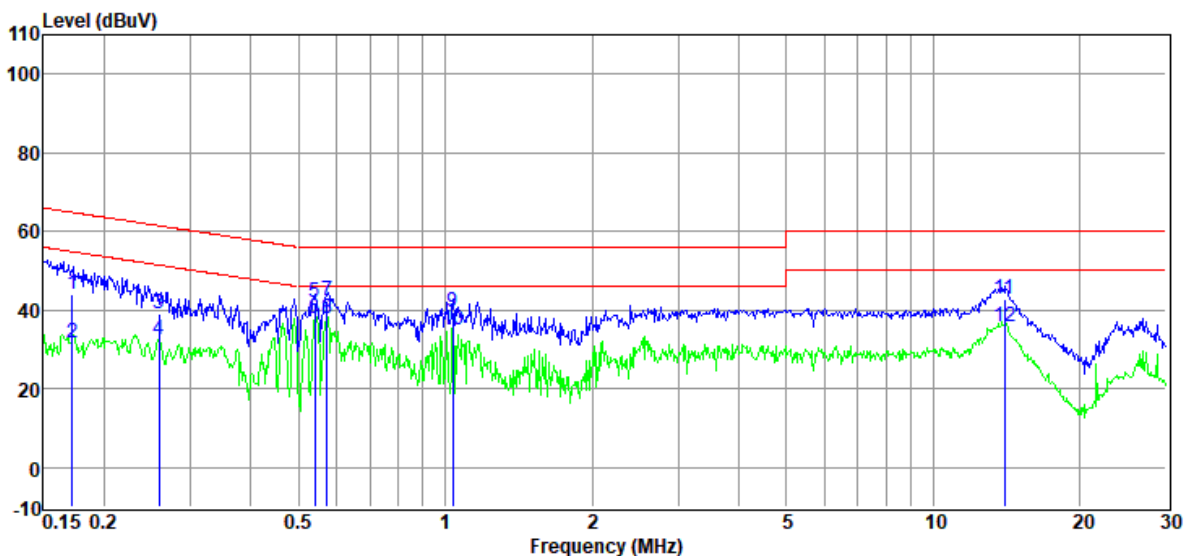

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	24.07	9.84	0.05	9.86	43.82	64.86	-21.04	QP	LINE
2	0.17	11.78	9.84	0.05	9.86	31.53	54.86	-23.33	Average	LINE
3	0.26	19.27	9.80	0.06	9.86	38.99	61.47	-22.48	QP	LINE
4	0.26	12.67	9.80	0.06	9.86	32.39	51.47	-19.08	Average	LINE
5	0.54	22.14	9.84	0.10	9.86	41.94	56.00	-14.06	QP	LINE
6	0.54	17.98	9.84	0.10	9.86	37.78	46.00	-8.22	Average	LINE
7	0.57	22.69	9.90	0.10	9.86	42.55	56.00	-13.45	QP	LINE
8	0.57	17.77	9.90	0.10	9.86	37.63	46.00	-8.37	Average	LINE
9	1.04	19.37	9.96	0.15	9.88	39.36	56.00	-16.64	QP	LINE
10	1.04	15.15	9.96	0.15	9.88	35.14	46.00	-10.86	Average	LINE
11	13.99	22.24	10.29	0.33	9.94	42.80	60.00	-17.20	QP	LINE
12	13.99	15.41	10.29	0.33	9.94	35.97	50.00	-14.03	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 16

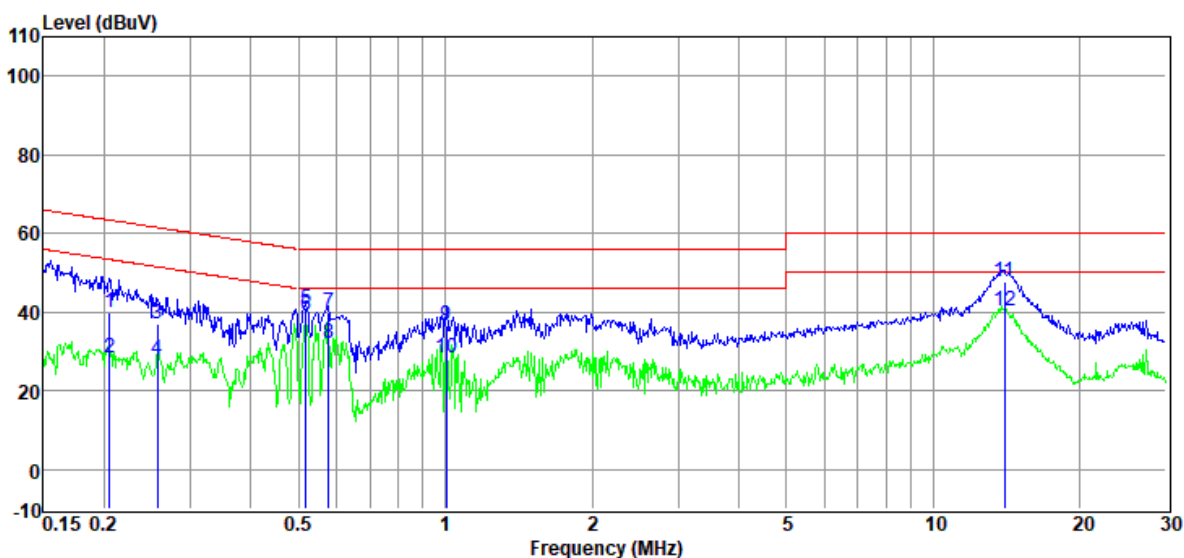

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.21	20.26	9.83	0.06	9.86	40.01	63.40	-23.39	QP	NEUTRAL
2	0.21	8.46	9.83	0.06	9.86	28.21	53.40	-25.19	Average	NEUTRAL
3	0.26	17.46	9.81	0.06	9.86	37.19	61.51	-24.32	QP	NEUTRAL
4	0.26	8.25	9.81	0.06	9.86	27.98	51.51	-23.53	Average	NEUTRAL
5	0.52	20.94	9.90	0.09	9.86	40.79	56.00	-15.21	QP	NEUTRAL
6	0.52	19.19	9.90	0.09	9.86	39.04	46.00	-6.96	Average	NEUTRAL
7	0.58	20.13	9.89	0.10	9.86	39.98	56.00	-16.02	QP	NEUTRAL
8	0.58	12.12	9.89	0.10	9.86	31.97	46.00	-14.03	Average	NEUTRAL
9	1.01	16.80	9.94	0.15	9.88	36.77	56.00	-19.23	QP	NEUTRAL
10	1.01	8.51	9.94	0.15	9.88	28.48	46.00	-17.52	Average	NEUTRAL
11	13.99	27.08	10.33	0.33	9.94	47.68	60.00	-12.32	QP	NEUTRAL
12	13.99	19.65	10.33	0.33	9.94	40.25	50.00	-9.75	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Phone USB Audio + MIC*2
+ Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 18

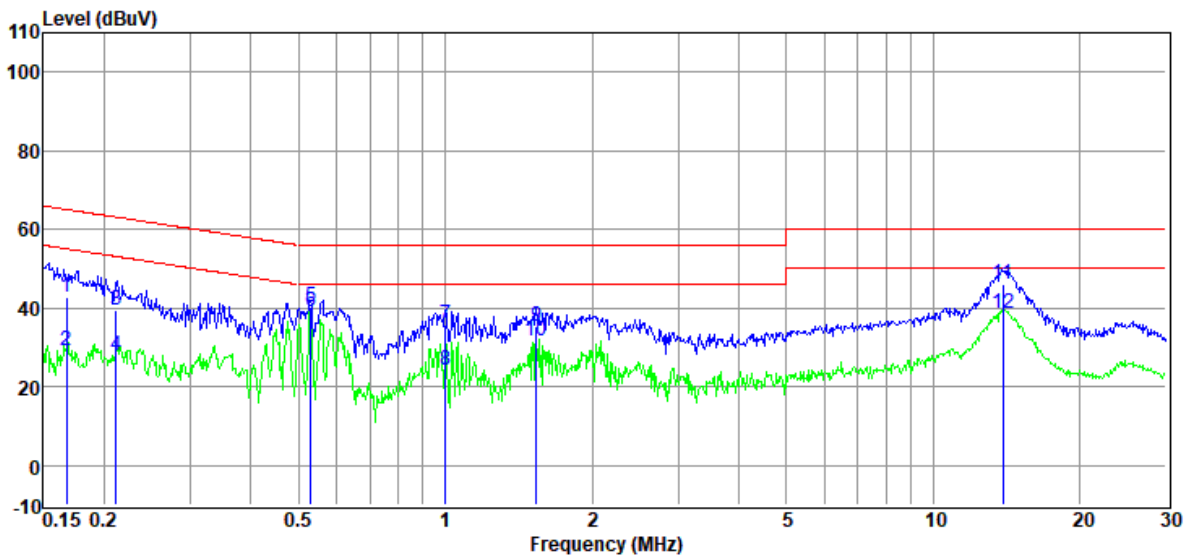

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	23.09	9.69	0.05	9.86	42.69	65.08	-22.39	QP	NEUTRAL
2	0.17	9.77	9.69	0.05	9.86	29.37	55.08	-25.71	Average	NEUTRAL
3	0.21	19.54	9.83	0.06	9.86	39.29	63.14	-23.85	QP	NEUTRAL
4	0.21	8.39	9.83	0.06	9.86	28.14	53.14	-25.00	Average	NEUTRAL
5	0.53	20.50	9.90	0.09	9.86	40.35	56.00	-15.65	QP	NEUTRAL
6	0.53	19.34	9.90	0.09	9.86	39.19	46.00	-6.81	Average	NEUTRAL
7	1.00	15.75	9.94	0.15	9.88	35.72	56.00	-20.28	QP	NEUTRAL
8	1.00	4.22	9.94	0.15	9.88	24.19	46.00	-21.81	Average	NEUTRAL
9	1.54	15.63	9.83	0.16	9.87	35.49	56.00	-20.51	QP	NEUTRAL
10	1.54	11.64	9.83	0.16	9.87	31.50	46.00	-14.50	Average	NEUTRAL
11	13.92	25.59	10.33	0.33	9.94	46.19	60.00	-13.81	QP	NEUTRAL
12	13.92	18.21	10.33	0.33	9.94	38.81	50.00	-11.19	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Phone USB Audio + MIC*2
+ Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 20

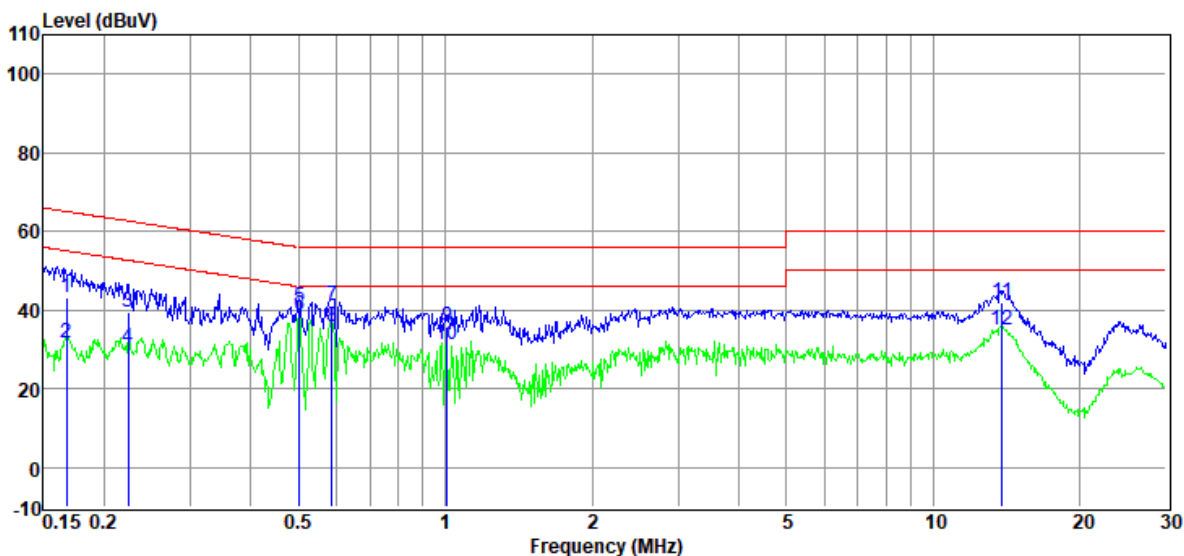

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	23.30	9.84	0.05	9.86	43.05	65.08	-22.03	QP	LINE
2	0.17	11.91	9.84	0.05	9.86	31.66	55.08	-23.42	Average	LINE
3	0.22	19.58	9.82	0.06	9.86	39.32	62.66	-23.34	QP	LINE
4	0.22	10.57	9.82	0.06	9.86	30.31	52.66	-22.35	Average	LINE
5	0.50	21.11	9.77	0.09	9.86	40.83	56.00	-15.17	QP	LINE
6	0.50	19.13	9.77	0.09	9.86	38.85	46.00	-7.15	Average	LINE
7	0.59	21.43	9.92	0.10	9.86	41.31	56.00	-14.69	QP	LINE
8	0.59	15.74	9.92	0.10	9.86	35.62	46.00	-10.38	Average	LINE
9	1.01	15.95	9.97	0.15	9.88	35.95	56.00	-20.05	QP	LINE
10	1.01	11.38	9.97	0.15	9.88	31.38	46.00	-14.62	Average	LINE
11	13.84	21.21	10.29	0.33	9.94	41.77	60.00	-18.23	QP	LINE
12	13.84	14.41	10.29	0.33	9.94	34.97	50.00	-15.03	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Phone USB Audio + MIC*2
+ Guitar mode
LISN : 2025 1# 216/LINE

Data: 22

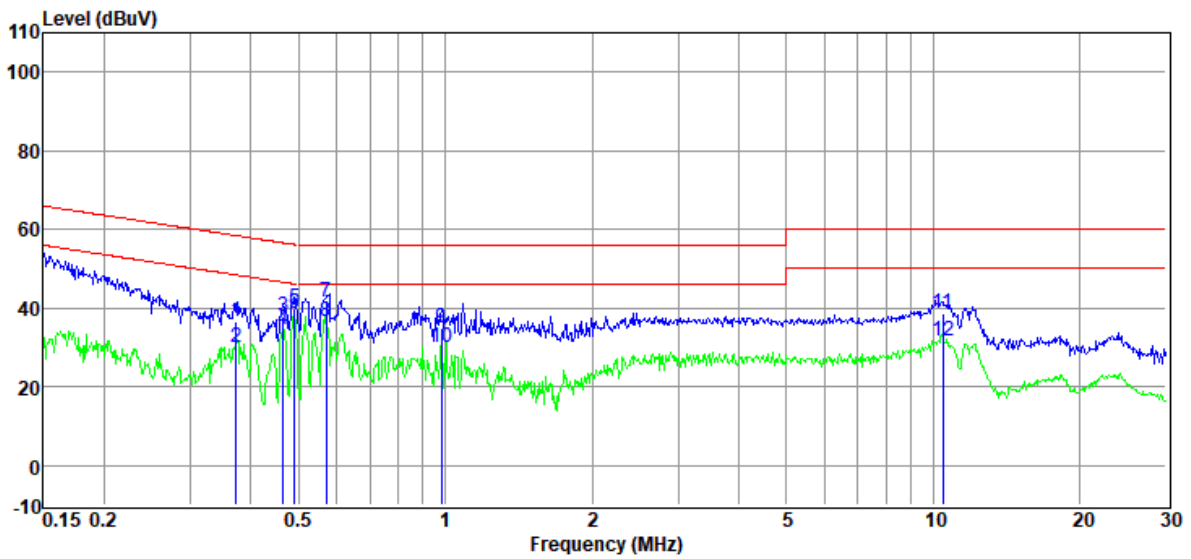

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.37	17.08	9.67	0.07	9.86	36.68	58.43	-21.75	QP	LINE
2	0.37	10.42	9.67	0.07	9.86	30.02	48.43	-18.41	Average	LINE
3	0.47	18.25	9.74	0.09	9.86	37.94	56.58	-18.64	QP	LINE
4	0.47	15.02	9.74	0.09	9.86	34.71	46.58	-11.87	Average	LINE
5	0.49	20.28	9.76	0.09	9.86	39.99	56.14	-16.15	QP	LINE
6	0.49	18.86	9.76	0.09	9.86	38.57	46.14	-7.57	Average	LINE
7	0.57	21.64	9.89	0.10	9.86	41.49	56.00	-14.51	QP	LINE
8	0.57	16.88	9.89	0.10	9.86	36.73	46.00	-9.27	Average	LINE
9	0.98	15.08	9.95	0.15	9.88	35.06	56.00	-20.94	QP	LINE
10	0.98	10.19	9.95	0.15	9.88	30.17	46.00	-15.83	Average	LINE
11	10.45	18.22	10.21	0.27	9.97	38.67	60.00	-21.33	QP	LINE
12	10.45	11.30	10.21	0.27	9.97	31.75	50.00	-18.25	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Phone USB Audio + MIC*2
+ Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 24

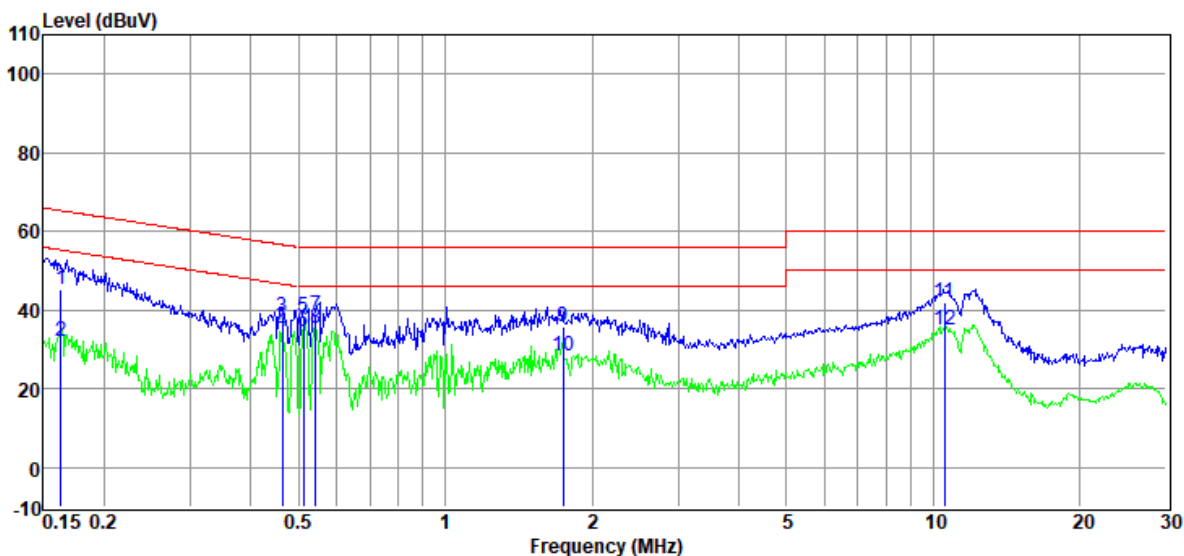

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	25.83	9.71	0.05	9.86	45.45	65.30	-19.85	QP	NEUTRAL
2	0.16	12.33	9.71	0.05	9.86	31.95	55.30	-23.35	Average	NEUTRAL
3	0.46	18.47	9.87	0.09	9.86	38.29	56.63	-18.34	QP	NEUTRAL
4	0.46	14.79	9.87	0.09	9.86	34.61	46.63	-12.02	Average	NEUTRAL
5	0.51	18.42	9.91	0.09	9.86	38.28	56.00	-17.72	QP	NEUTRAL
6	0.51	14.56	9.91	0.09	9.86	34.42	46.00	-11.58	Average	NEUTRAL
7	0.54	18.96	9.90	0.10	9.86	38.82	56.00	-17.18	QP	NEUTRAL
8	0.54	15.37	9.90	0.10	9.86	35.23	46.00	-10.77	Average	NEUTRAL
9	1.74	16.15	9.80	0.16	9.87	35.98	56.00	-20.02	QP	NEUTRAL
10	1.74	8.32	9.80	0.16	9.87	28.15	46.00	-17.85	Average	NEUTRAL
11	10.56	21.64	10.20	0.27	9.97	42.08	60.00	-17.92	QP	NEUTRAL
12	10.56	14.65	10.20	0.27	9.97	35.09	50.00	-14.91	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Laptop USB Audio + MIC*2
+ Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 26

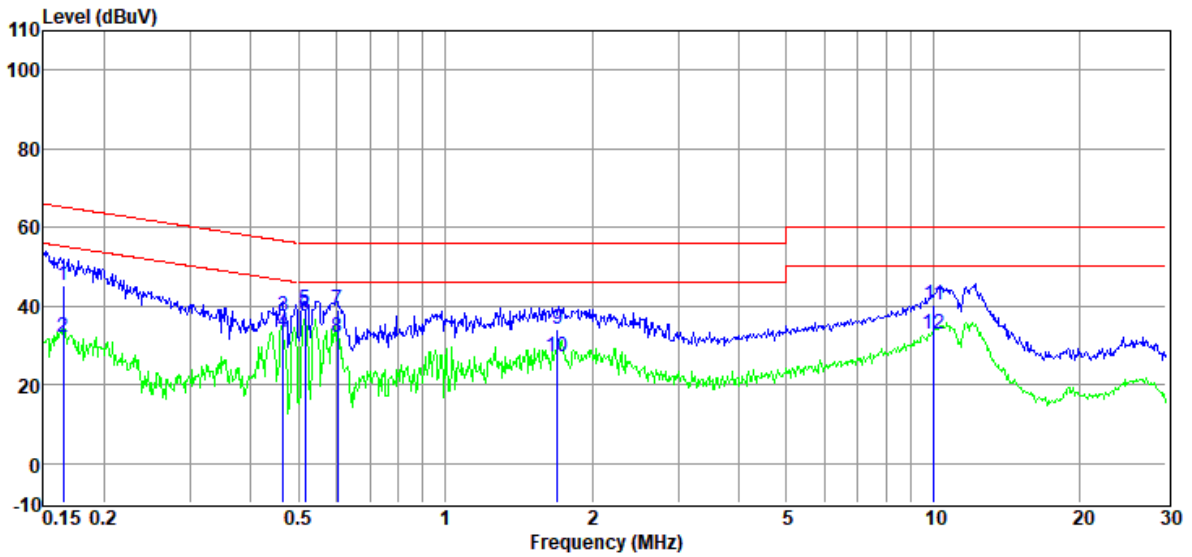

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	25.51	9.70	0.05	9.86	45.12	65.21	-20.09	QP	NEUTRAL
2	0.17	12.32	9.70	0.05	9.86	31.93	55.21	-23.28	Average	NEUTRAL
3	0.47	17.79	9.88	0.09	9.86	37.62	56.58	-18.96	QP	NEUTRAL
4	0.47	13.50	9.88	0.09	9.86	33.33	46.58	-13.25	Average	NEUTRAL
5	0.52	19.07	9.90	0.09	9.86	38.92	56.00	-17.08	QP	NEUTRAL
6	0.52	17.39	9.90	0.09	9.86	37.24	46.00	-8.76	Average	NEUTRAL
7	0.60	19.14	9.88	0.11	9.87	39.00	56.00	-17.00	QP	NEUTRAL
8	0.60	12.07	9.88	0.11	9.87	31.93	46.00	-14.07	Average	NEUTRAL
9	1.70	14.47	9.80	0.16	9.87	34.30	56.00	-21.70	QP	NEUTRAL
10	1.70	7.31	9.80	0.16	9.87	27.14	46.00	-18.86	Average	NEUTRAL
11	10.02	19.97	10.17	0.26	9.98	40.38	60.00	-19.62	QP	NEUTRAL
12	10.02	12.36	10.17	0.26	9.98	32.77	50.00	-17.23	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Laptop USB Audio + MIC*2
+ Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 28

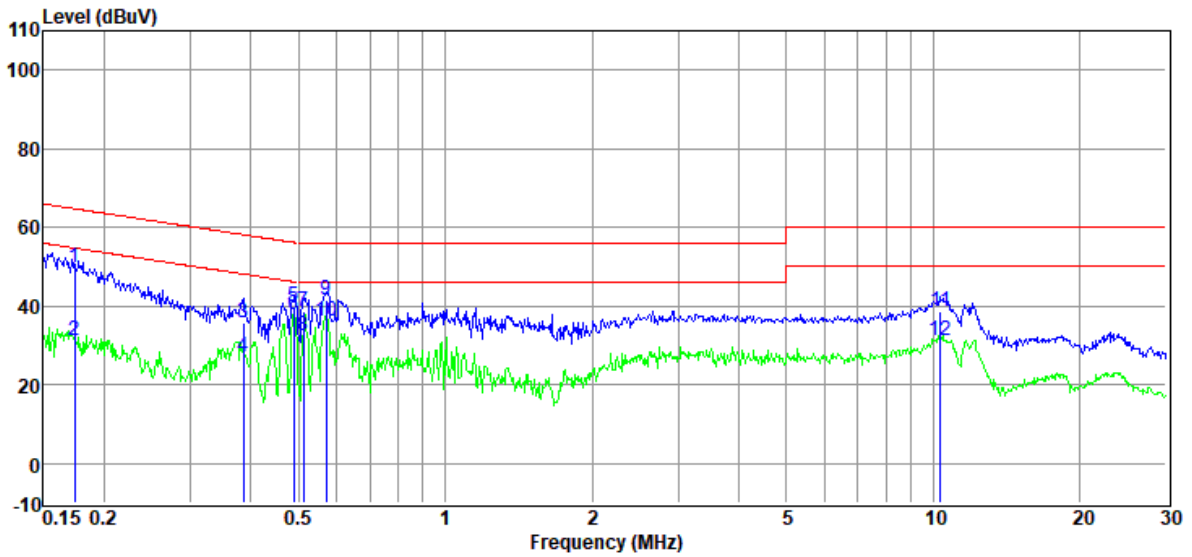

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	30.20	9.84	0.06	9.86	49.96	64.77	-14.81	QP	LINE
2	0.17	11.47	9.84	0.06	9.86	31.23	54.77	-23.54	Average	LINE
3	0.39	16.28	9.68	0.07	9.86	35.89	58.17	-22.28	QP	LINE
4	0.39	7.35	9.68	0.07	9.86	26.96	48.17	-21.21	Average	LINE
5	0.49	20.24	9.76	0.09	9.86	39.95	56.19	-16.24	QP	LINE
6	0.49	18.16	9.76	0.09	9.86	37.87	46.19	-8.32	Average	LINE
7	0.51	19.05	9.79	0.09	9.86	38.79	56.00	-17.21	QP	LINE
8	0.51	12.57	9.79	0.09	9.86	32.31	46.00	-13.69	Average	LINE
9	0.57	21.59	9.89	0.10	9.86	41.44	56.00	-14.56	QP	LINE
10	0.57	16.51	9.89	0.10	9.86	36.36	46.00	-9.64	Average	LINE
11	10.34	18.40	10.21	0.27	9.98	38.86	60.00	-21.14	QP	LINE
12	10.34	10.95	10.21	0.27	9.98	31.41	50.00	-18.59	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Laptop USB Audio + MIC*2
+ Guitar mode
LISN : 2025 1# 216/LINE

Data: 30

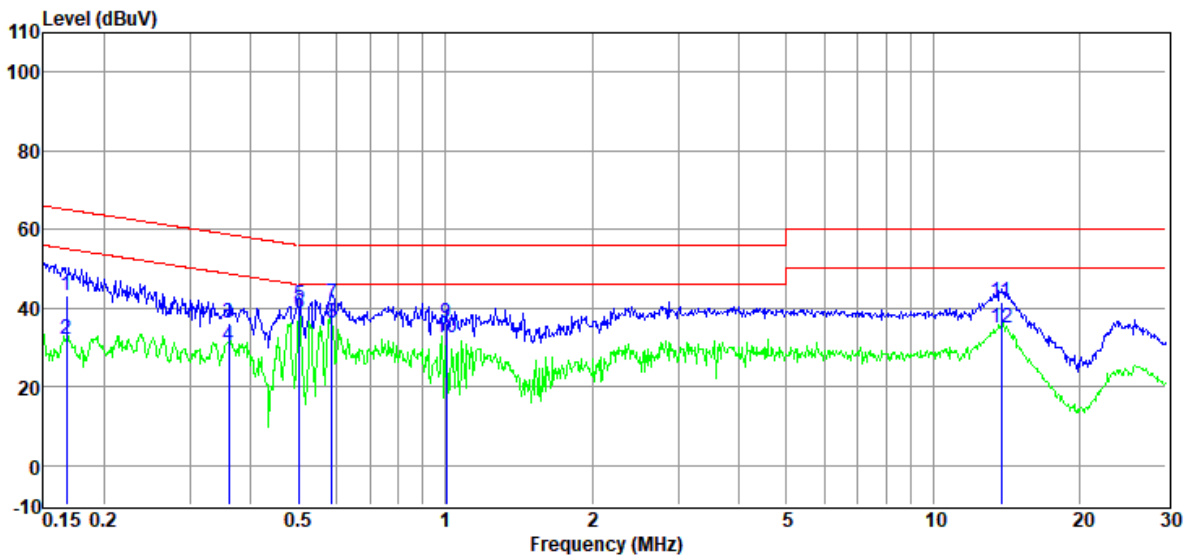

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	23.47	9.84	0.05	9.86	43.22	65.08	-21.86	QP	LINE
2	0.17	12.42	9.84	0.05	9.86	32.17	55.08	-22.91	Average	LINE
3	0.36	16.66	9.67	0.07	9.86	36.26	58.74	-22.48	QP	LINE
4	0.36	10.96	9.67	0.07	9.86	30.56	48.74	-18.18	Average	LINE
5	0.50	21.05	9.77	0.09	9.86	40.77	56.00	-15.23	QP	LINE
6	0.50	19.00	9.77	0.09	9.86	38.72	46.00	-7.28	Average	LINE
7	0.59	21.45	9.92	0.10	9.86	41.33	56.00	-14.67	QP	LINE
8	0.59	16.44	9.92	0.10	9.86	36.32	46.00	-9.68	Average	LINE
9	1.01	16.34	9.97	0.15	9.88	36.34	56.00	-19.66	QP	LINE
10	1.01	12.58	9.97	0.15	9.88	32.58	46.00	-13.42	Average	LINE
11	13.77	20.92	10.29	0.33	9.94	41.48	60.00	-18.52	QP	LINE
12	13.77	14.23	10.29	0.33	9.94	34.79	50.00	-15.21	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Laptop USB Audio + MIC*2
+ Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 32

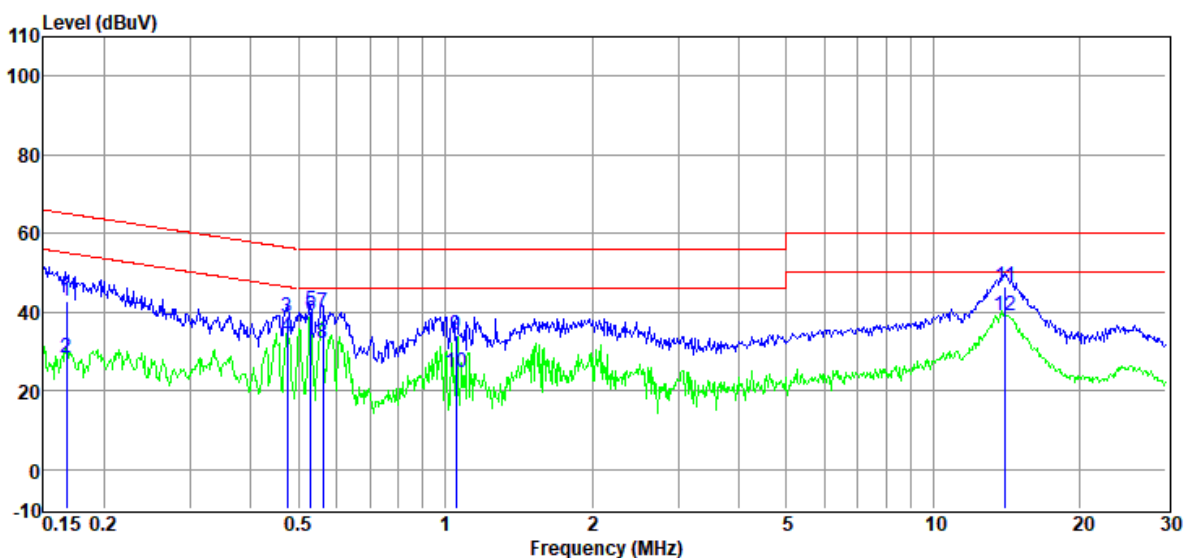

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	23.29	9.69	0.05	9.86	42.89	65.08	-22.19	QP	NEUTRAL
2	0.17	8.95	9.69	0.05	9.86	28.55	55.08	-26.53	Average	NEUTRAL
3	0.47	18.88	9.88	0.09	9.86	38.71	56.45	-17.74	QP	NEUTRAL
4	0.47	13.87	9.88	0.09	9.86	33.70	46.45	-12.75	Average	NEUTRAL
5	0.53	20.54	9.90	0.09	9.86	40.39	56.00	-15.61	QP	NEUTRAL
6	0.53	19.41	9.90	0.09	9.86	39.26	46.00	-6.74	Average	NEUTRAL
7	0.56	20.17	9.89	0.10	9.86	40.02	56.00	-15.98	QP	NEUTRAL
8	0.56	12.42	9.89	0.10	9.86	32.27	46.00	-13.73	Average	NEUTRAL
9	1.05	14.14	9.93	0.15	9.88	34.10	56.00	-21.90	QP	NEUTRAL
10	1.05	4.67	9.93	0.15	9.88	24.63	46.00	-21.37	Average	NEUTRAL
11	14.06	25.84	10.33	0.33	9.94	46.44	60.00	-13.56	QP	NEUTRAL
12	14.06	18.44	10.33	0.33	9.94	39.04	50.00	-10.96	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 34

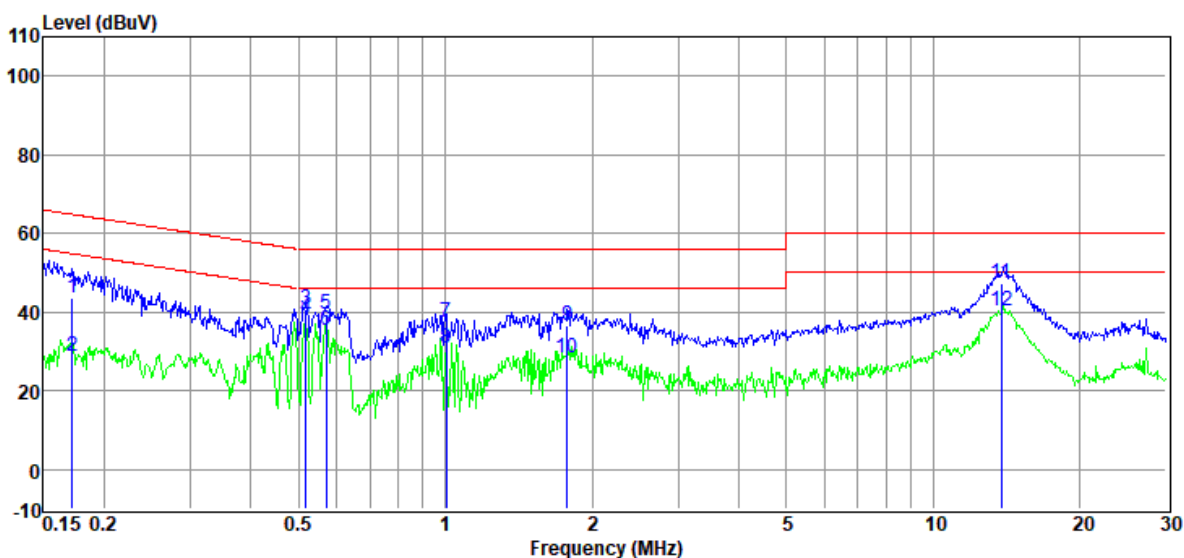

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	24.11	9.69	0.05	9.86	43.71	64.86	-21.15	QP	NEUTRAL
2	0.17	9.26	9.69	0.05	9.86	28.86	54.86	-26.00	Average	NEUTRAL
3	0.52	20.83	9.90	0.09	9.86	40.68	56.00	-15.32	QP	NEUTRAL
4	0.52	18.78	9.90	0.09	9.86	38.63	46.00	-7.37	Average	NEUTRAL
5	0.57	19.65	9.89	0.10	9.86	39.50	56.00	-16.50	QP	NEUTRAL
6	0.57	15.62	9.89	0.10	9.86	35.47	46.00	-10.53	Average	NEUTRAL
7	1.01	17.55	9.94	0.15	9.88	37.52	56.00	-18.48	QP	NEUTRAL
8	1.01	10.83	9.94	0.15	9.88	30.80	46.00	-15.20	Average	NEUTRAL
9	1.78	16.85	9.79	0.16	9.87	36.67	56.00	-19.33	QP	NEUTRAL
10	1.78	8.37	9.79	0.16	9.87	28.19	46.00	-17.81	Average	NEUTRAL
11	13.77	26.56	10.32	0.33	9.94	47.15	60.00	-12.85	QP	NEUTRAL
12	13.77	19.57	10.32	0.33	9.94	40.16	50.00	-9.84	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 36

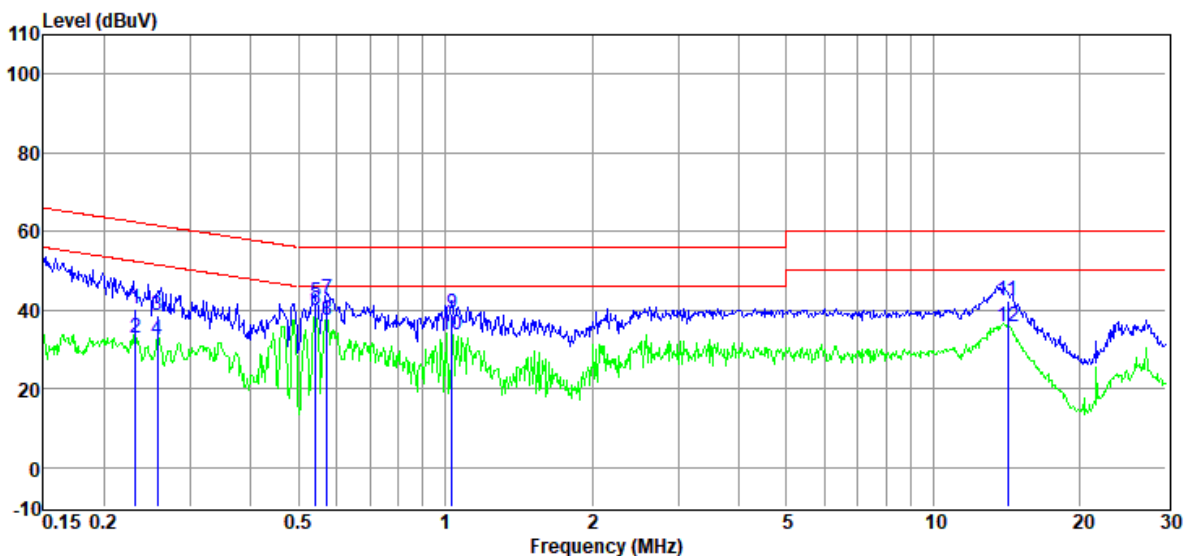

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.23	20.55	9.82	0.06	9.86	40.29	62.39	-22.10	QP	LINE
2	0.23	13.23	9.82	0.06	9.86	32.97	52.39	-19.42	Average	LINE
3	0.26	18.99	9.80	0.06	9.86	38.71	61.51	-22.80	QP	LINE
4	0.26	12.80	9.80	0.06	9.86	32.52	51.51	-18.99	Average	LINE
5	0.54	22.11	9.85	0.10	9.86	41.92	56.00	-14.08	QP	LINE
6	0.54	20.10	9.85	0.10	9.86	39.91	46.00	-6.09	Average	LINE
7	0.57	22.73	9.90	0.10	9.86	42.59	56.00	-13.41	QP	LINE
8	0.57	17.38	9.90	0.10	9.86	37.24	46.00	-8.76	Average	LINE
9	1.03	18.94	9.96	0.15	9.88	38.93	56.00	-17.07	QP	LINE
10	1.03	13.82	9.96	0.15	9.88	33.81	46.00	-12.19	Average	LINE
11	14.21	21.62	10.30	0.34	9.94	42.20	60.00	-17.80	QP	LINE
12	14.21	15.09	10.30	0.34	9.94	35.67	50.00	-14.33	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 38

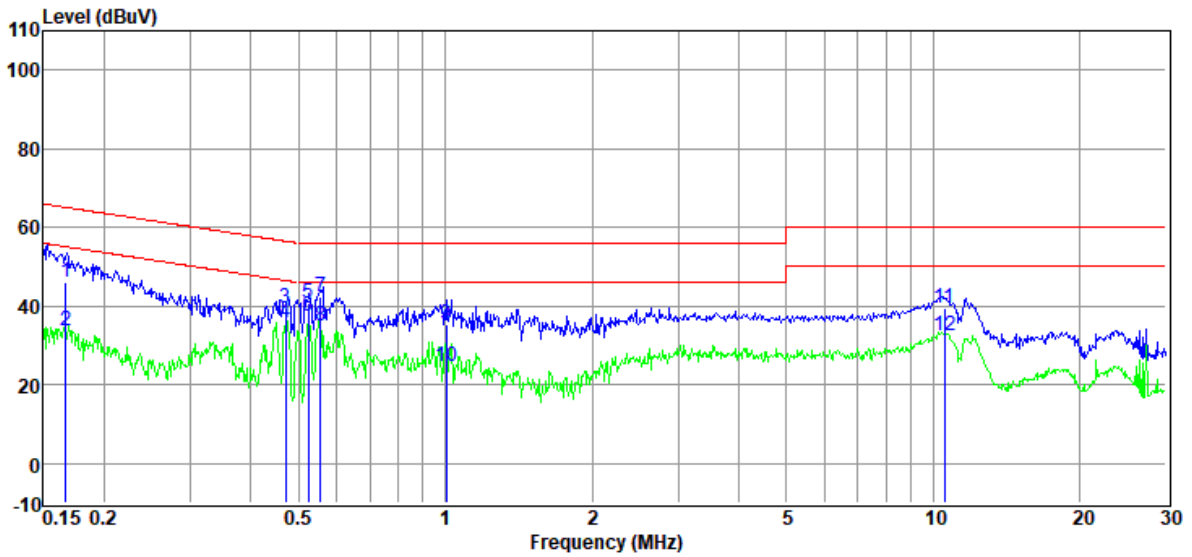

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	26.20	9.84	0.05	9.86	45.95	65.12	-19.17	QP	LINE
2	0.17	14.01	9.84	0.05	9.86	33.76	55.12	-21.36	Average	LINE
3	0.47	19.74	9.75	0.09	9.86	39.44	56.49	-17.05	QP	LINE
4	0.47	16.25	9.75	0.09	9.86	35.95	46.49	-10.54	Average	LINE
5	0.52	21.02	9.81	0.09	9.86	40.78	56.00	-15.22	QP	LINE
6	0.52	17.72	9.81	0.09	9.86	37.48	46.00	-8.52	Average	LINE
7	0.56	22.55	9.87	0.10	9.86	42.38	56.00	-13.62	QP	LINE
8	0.56	15.19	9.87	0.10	9.86	35.02	46.00	-10.98	Average	LINE
9	1.01	15.42	9.97	0.15	9.88	35.42	56.00	-20.58	QP	LINE
10	1.01	4.74	9.97	0.15	9.88	24.74	46.00	-21.26	Average	LINE
11	10.56	19.03	10.22	0.27	9.97	39.49	60.00	-20.51	QP	LINE
12	10.56	11.95	10.22	0.27	9.97	32.41	50.00	-17.59	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 40

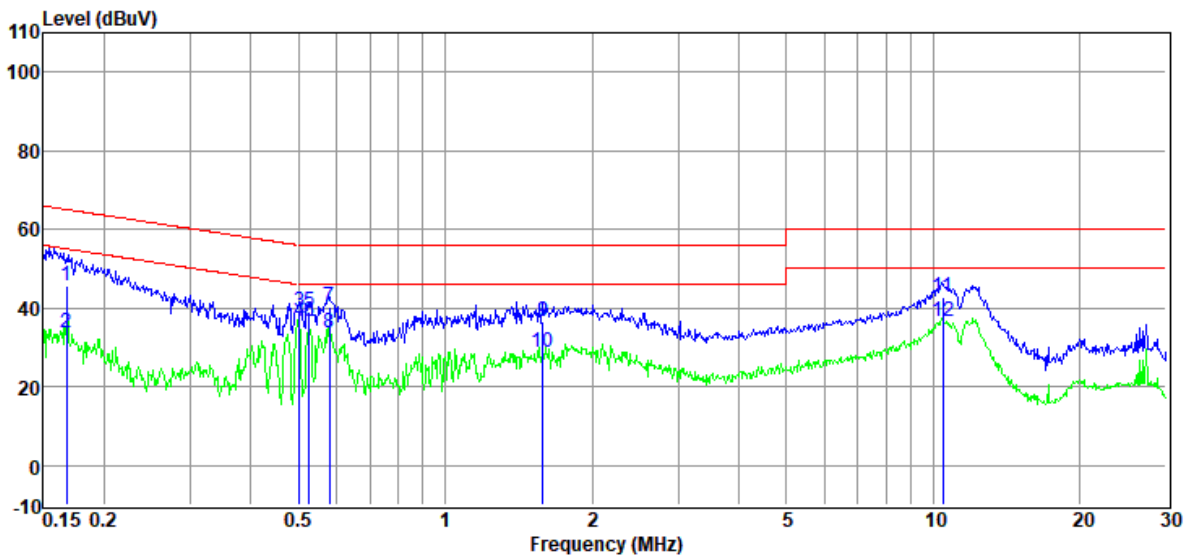

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	26.05	9.69	0.05	9.86	45.65	65.08	-19.43	QP	NEUTRAL
2	0.17	14.00	9.69	0.05	9.86	33.60	55.08	-21.48	Average	NEUTRAL
3	0.50	19.02	9.91	0.09	9.86	38.88	56.00	-17.12	QP	NEUTRAL
4	0.50	16.64	9.91	0.09	9.86	36.50	46.00	-9.50	Average	NEUTRAL
5	0.53	19.37	9.90	0.09	9.86	39.22	56.00	-16.78	QP	NEUTRAL
6	0.53	16.65	9.90	0.09	9.86	36.50	46.00	-9.50	Average	NEUTRAL
7	0.58	20.36	9.89	0.10	9.86	40.21	56.00	-15.79	QP	NEUTRAL
8	0.58	14.00	9.89	0.10	9.86	33.85	46.00	-12.15	Average	NEUTRAL
9	1.59	16.76	9.82	0.16	9.87	36.61	56.00	-19.39	QP	NEUTRAL
10	1.59	9.06	9.82	0.16	9.87	28.91	46.00	-17.09	Average	NEUTRAL
11	10.45	22.53	10.19	0.27	9.97	42.96	60.00	-17.04	QP	NEUTRAL
12	10.45	16.03	10.19	0.27	9.97	36.46	50.00	-13.54	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 42

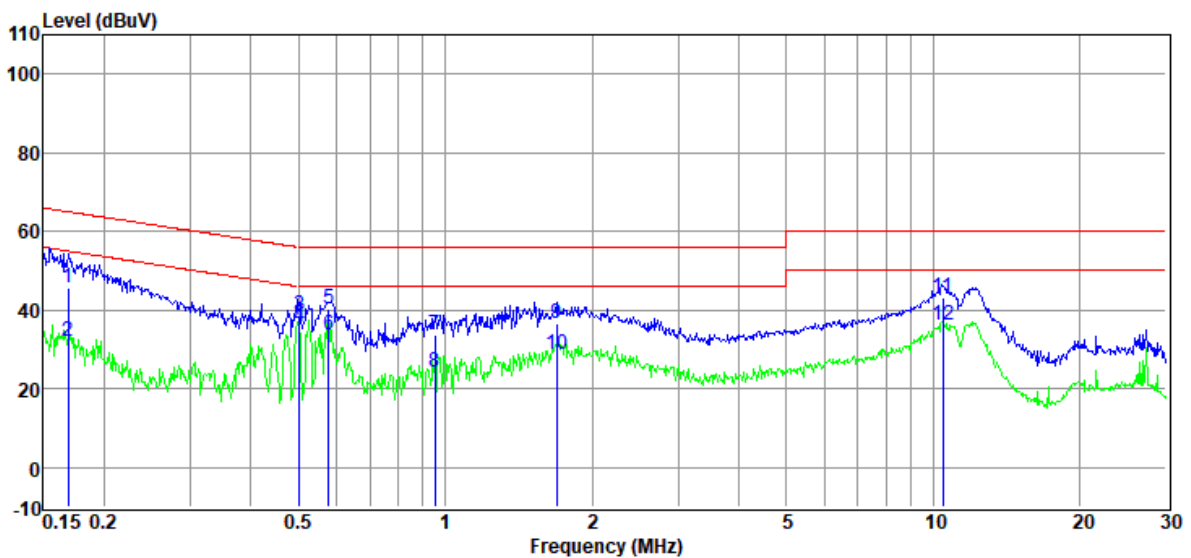

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	26.04	9.69	0.05	9.86	45.64	65.03	-19.39	QP	NEUTRAL
2	0.17	12.26	9.69	0.05	9.86	31.86	55.03	-23.17	Average	NEUTRAL
3	0.50	18.96	9.91	0.09	9.86	38.82	56.00	-17.18	QP	NEUTRAL
4	0.50	15.87	9.91	0.09	9.86	35.73	46.00	-10.27	Average	NEUTRAL
5	0.58	20.36	9.89	0.10	9.86	40.21	56.00	-15.79	QP	NEUTRAL
6	0.58	13.95	9.89	0.10	9.86	33.80	46.00	-12.20	Average	NEUTRAL
7	0.95	13.74	9.91	0.15	9.88	33.68	56.00	-22.32	QP	NEUTRAL
8	0.95	4.28	9.91	0.15	9.88	24.22	46.00	-21.78	Average	NEUTRAL
9	1.69	16.86	9.80	0.16	9.87	36.69	56.00	-19.31	QP	NEUTRAL
10	1.69	9.04	9.80	0.16	9.87	28.87	46.00	-17.13	Average	NEUTRAL
11	10.45	22.72	10.19	0.27	9.97	43.15	60.00	-16.85	QP	NEUTRAL
12	10.45	15.72	10.19	0.27	9.97	36.15	50.00	-13.85	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 44

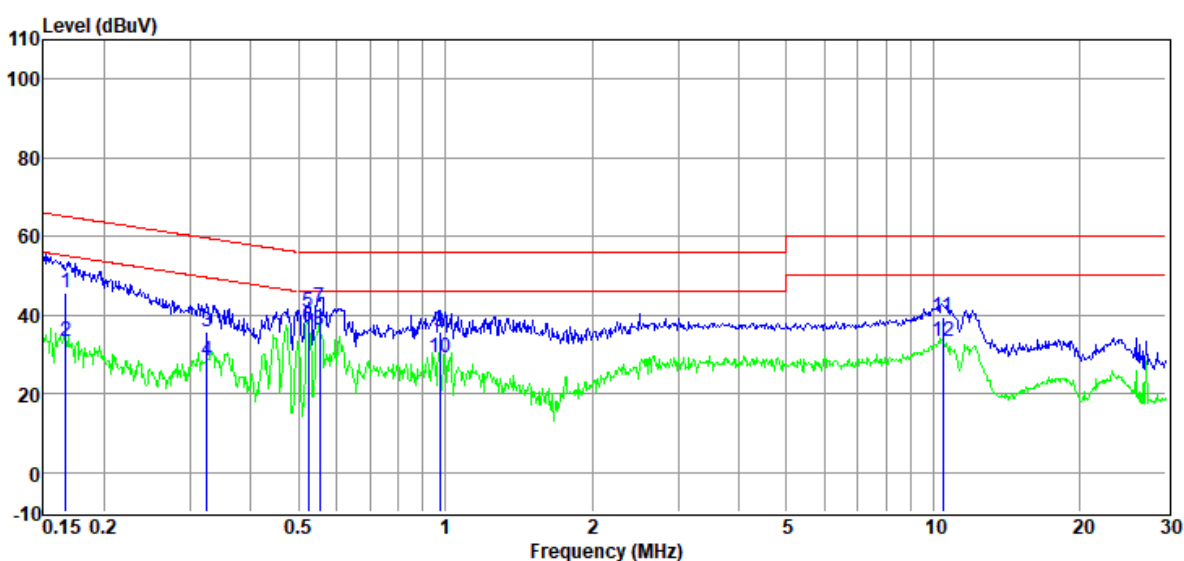

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	26.11	9.84	0.05	9.86	45.86	65.12	-19.26	QP	LINE
2	0.17	13.38	9.84	0.05	9.86	33.13	55.12	-21.99	Average	LINE
3	0.33	16.19	9.68	0.06	9.86	35.79	59.57	-23.78	QP	LINE
4	0.33	8.61	9.68	0.06	9.86	28.21	49.57	-21.36	Average	LINE
5	0.52	20.95	9.81	0.09	9.86	40.71	56.00	-15.29	QP	LINE
6	0.52	17.35	9.81	0.09	9.86	37.11	46.00	-8.89	Average	LINE
7	0.55	22.19	9.86	0.10	9.86	42.01	56.00	-13.99	QP	LINE
8	0.55	16.43	9.86	0.10	9.86	36.25	46.00	-9.75	Average	LINE
9	0.97	15.90	9.94	0.15	9.88	35.87	56.00	-20.13	QP	LINE
10	0.97	9.11	9.94	0.15	9.88	29.08	46.00	-16.92	Average	LINE
11	10.45	19.08	10.21	0.27	9.97	39.53	60.00	-20.47	QP	LINE
12	10.45	12.66	10.21	0.27	9.97	33.11	50.00	-16.89	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 46

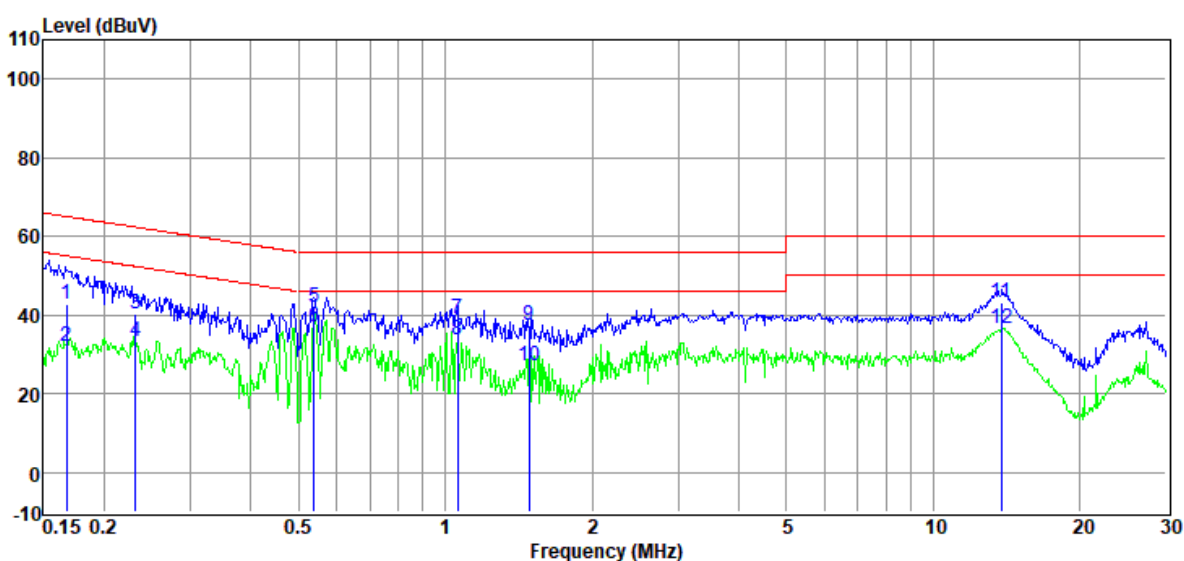

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	23.21	9.84	0.05	9.86	42.96	65.08	-22.12	QP	LINE
2	0.17	12.14	9.84	0.05	9.86	31.89	55.08	-23.19	Average	LINE
3	0.23	20.44	9.82	0.06	9.86	40.18	62.39	-22.21	QP	LINE
4	0.23	13.48	9.82	0.06	9.86	33.22	52.39	-19.17	Average	LINE
5	0.54	22.09	9.84	0.10	9.86	41.89	56.00	-14.11	QP	LINE
6	0.54	17.10	9.84	0.10	9.86	36.90	46.00	-9.10	Average	LINE
7	1.06	18.91	9.95	0.15	9.88	38.89	56.00	-17.11	QP	LINE
8	1.06	13.63	9.95	0.15	9.88	33.61	46.00	-12.39	Average	LINE
9	1.49	17.60	9.87	0.16	9.87	37.50	56.00	-18.50	QP	LINE
10	1.49	7.37	9.87	0.16	9.87	27.27	46.00	-18.73	Average	LINE
11	13.77	22.45	10.29	0.33	9.94	43.01	60.00	-16.99	QP	LINE
12	13.77	15.97	10.29	0.33	9.94	36.53	50.00	-13.47	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 48

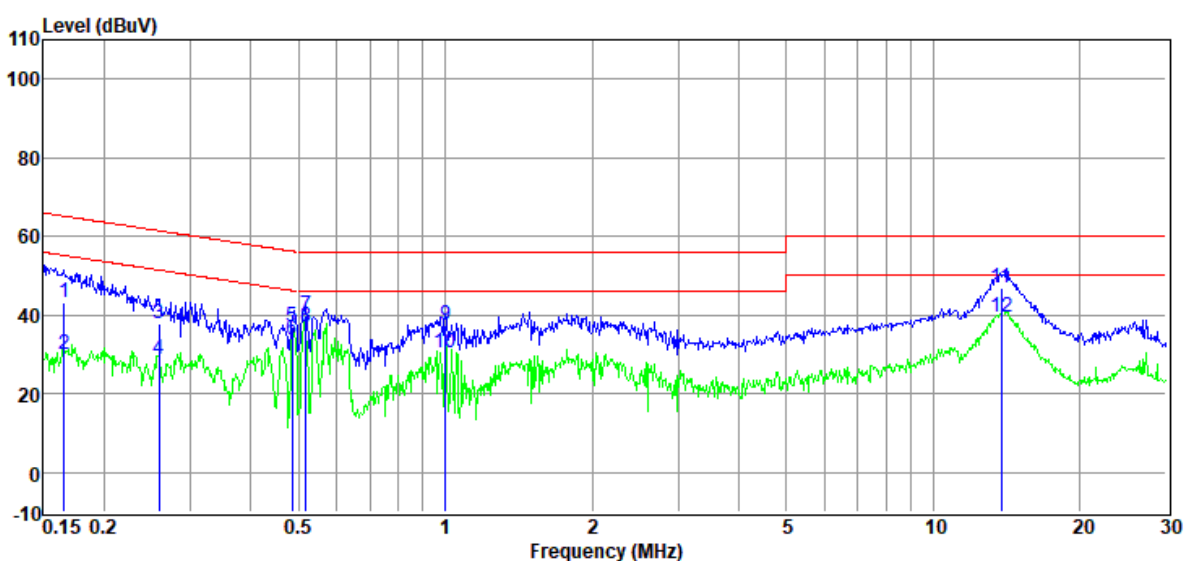

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	23.65	9.70	0.05	9.86	43.26	65.16	-21.90	QP	NEUTRAL
2	0.17	10.59	9.70	0.05	9.86	30.20	55.16	-24.96	Average	NEUTRAL
3	0.26	17.91	9.80	0.06	9.86	37.63	61.47	-23.84	QP	NEUTRAL
4	0.26	8.93	9.80	0.06	9.86	28.65	51.47	-22.82	Average	NEUTRAL
5	0.49	17.04	9.90	0.09	9.86	36.89	56.23	-19.34	QP	NEUTRAL
6	0.49	13.94	9.90	0.09	9.86	33.79	46.23	-12.44	Average	NEUTRAL
7	0.52	20.20	9.90	0.09	9.86	40.05	56.00	-15.95	QP	NEUTRAL
8	0.52	17.16	9.90	0.09	9.86	37.01	46.00	-8.99	Average	NEUTRAL
9	1.00	17.64	9.94	0.15	9.88	37.61	56.00	-18.39	QP	NEUTRAL
10	1.00	10.59	9.94	0.15	9.88	30.56	46.00	-15.44	Average	NEUTRAL
11	13.77	26.41	10.32	0.33	9.94	47.00	60.00	-13.00	QP	NEUTRAL
12	13.77	18.96	10.32	0.33	9.94	39.55	50.00	-10.45	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 50

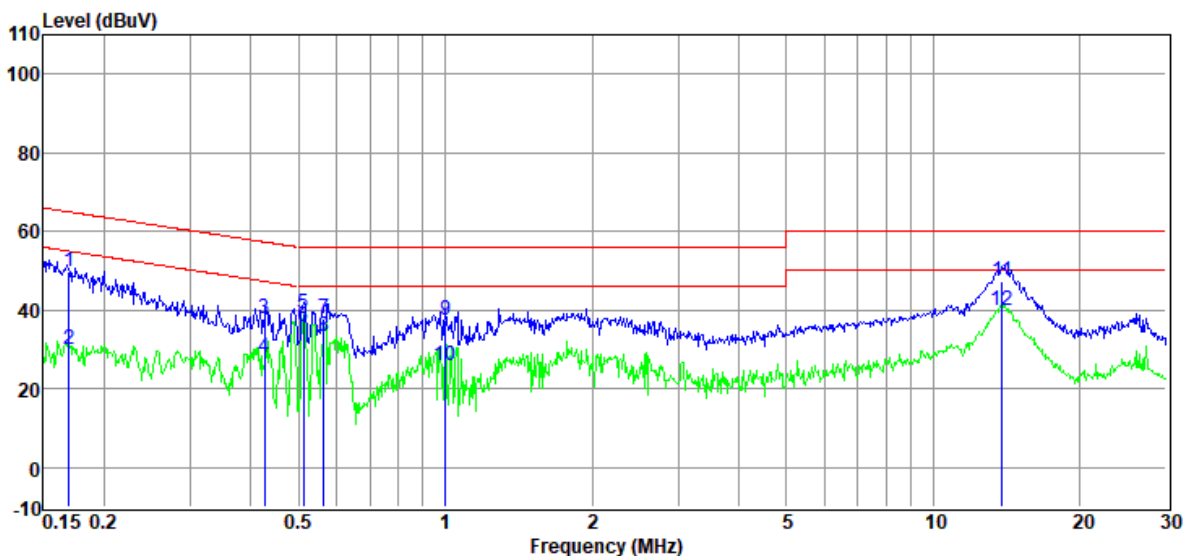

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	30.41	9.68	0.05	9.86	50.00	64.99	-14.99	QP	NEUTRAL
2	0.17	10.41	9.68	0.05	9.86	30.00	54.99	-24.99	Average	NEUTRAL
3	0.43	17.99	9.83	0.08	9.86	37.76	57.33	-19.57	QP	NEUTRAL
4	0.43	8.16	9.83	0.08	9.86	27.93	47.33	-19.40	Average	NEUTRAL
5	0.51	19.38	9.91	0.09	9.86	39.24	56.00	-16.76	QP	NEUTRAL
6	0.51	16.04	9.91	0.09	9.86	35.90	46.00	-10.10	Average	NEUTRAL
7	0.56	18.16	9.89	0.10	9.86	38.01	56.00	-17.99	QP	NEUTRAL
8	0.56	13.60	9.89	0.10	9.86	33.45	46.00	-12.55	Average	NEUTRAL
9	1.00	17.40	9.94	0.15	9.88	37.37	56.00	-18.63	QP	NEUTRAL
10	1.00	5.88	9.94	0.15	9.88	25.85	46.00	-20.15	Average	NEUTRAL
11	13.84	26.89	10.32	0.33	9.94	47.48	60.00	-12.52	QP	NEUTRAL
12	13.84	19.22	10.32	0.33	9.94	39.81	50.00	-10.19	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 52

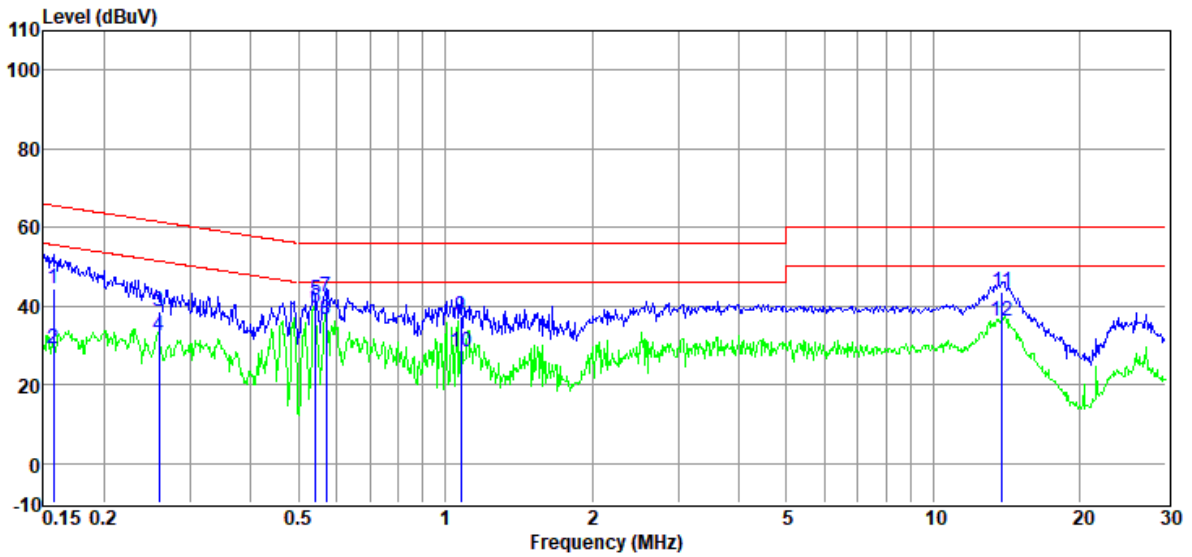

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	24.67	9.85	0.05	9.86	44.43	65.60	-21.17	QP	LINE
2	0.16	9.23	9.85	0.05	9.86	28.99	55.60	-26.61	Average	LINE
3	0.26	19.08	9.80	0.06	9.86	38.80	61.47	-22.67	QP	LINE
4	0.26	12.60	9.80	0.06	9.86	32.32	51.47	-19.15	Average	LINE
5	0.54	21.69	9.85	0.10	9.86	41.50	56.00	-14.50	QP	LINE
6	0.54	19.60	9.85	0.10	9.86	39.41	46.00	-6.59	Average	LINE
7	0.57	22.62	9.89	0.10	9.86	42.47	56.00	-13.53	QP	LINE
8	0.57	16.68	9.89	0.10	9.86	36.53	46.00	-9.47	Average	LINE
9	1.08	17.29	9.95	0.15	9.88	37.27	56.00	-18.73	QP	LINE
10	1.08	8.48	9.95	0.15	9.88	28.46	46.00	-17.54	Average	LINE
11	13.84	22.91	10.29	0.33	9.94	43.47	60.00	-16.53	QP	LINE
12	13.84	15.56	10.29	0.33	9.94	36.12	50.00	-13.88	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 54

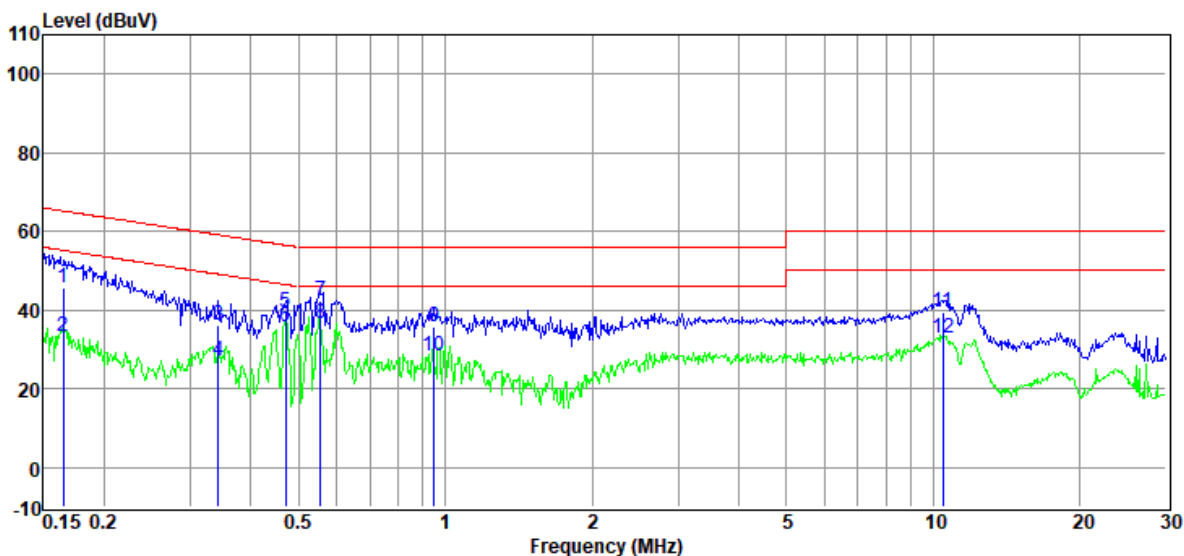

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	25.75	9.84	0.05	9.86	45.50	65.21	-19.71	QP	LINE
2	0.17	13.72	9.84	0.05	9.86	33.47	55.21	-21.74	Average	LINE
3	0.34	16.52	9.67	0.07	9.86	36.12	59.13	-23.01	QP	LINE
4	0.34	7.51	9.67	0.07	9.86	27.11	49.13	-22.02	Average	LINE
5	0.47	19.87	9.75	0.09	9.86	39.57	56.49	-16.92	QP	LINE
6	0.47	15.95	9.75	0.09	9.86	35.65	46.49	-10.84	Average	LINE
7	0.56	22.56	9.87	0.10	9.86	42.39	56.00	-13.61	QP	LINE
8	0.56	16.59	9.87	0.10	9.86	36.42	46.00	-9.58	Average	LINE
9	0.95	15.79	9.91	0.15	9.88	35.73	56.00	-20.27	QP	LINE
10	0.95	8.56	9.91	0.15	9.88	28.50	46.00	-17.50	Average	LINE
11	10.45	19.00	10.21	0.27	9.97	39.45	60.00	-20.55	QP	LINE
12	10.45	12.42	10.21	0.27	9.97	32.87	50.00	-17.13	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 56

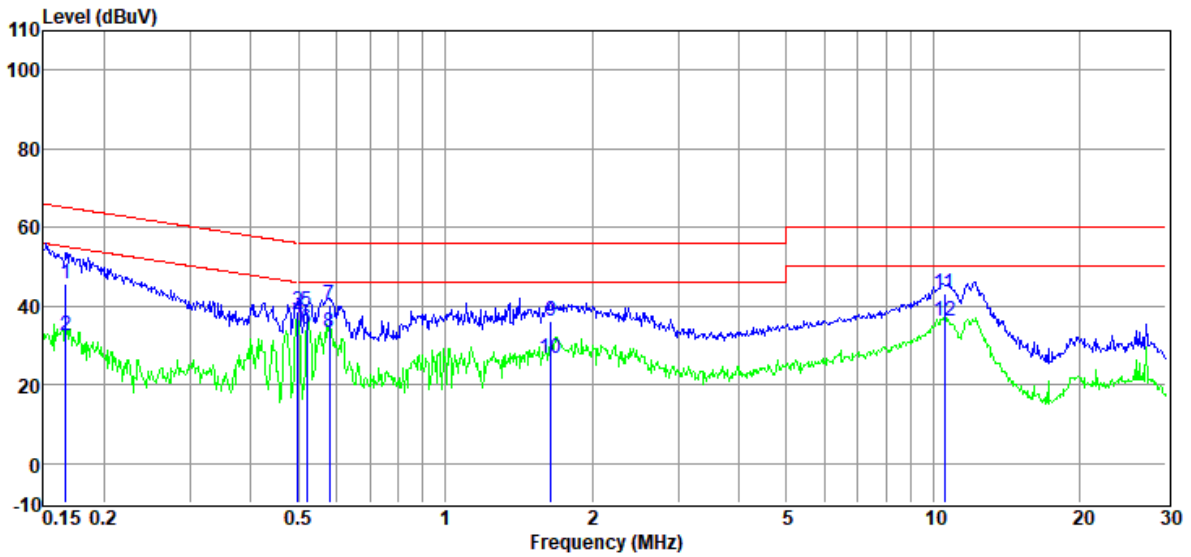

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	26.09	9.69	0.05	9.86	45.69	65.12	-19.43	QP	NEUTRAL
2	0.17	12.73	9.69	0.05	9.86	32.33	55.12	-22.79	Average	NEUTRAL
3	0.50	18.86	9.91	0.09	9.86	38.72	56.01	-17.29	QP	NEUTRAL
4	0.50	17.24	9.91	0.09	9.86	37.10	46.01	-8.91	Average	NEUTRAL
5	0.52	18.79	9.90	0.09	9.86	38.64	56.00	-17.36	QP	NEUTRAL
6	0.52	14.14	9.90	0.09	9.86	33.99	46.00	-12.01	Average	NEUTRAL
7	0.58	20.30	9.89	0.10	9.86	40.15	56.00	-15.85	QP	NEUTRAL
8	0.58	13.36	9.89	0.10	9.86	33.21	46.00	-12.79	Average	NEUTRAL
9	1.65	16.44	9.81	0.16	9.87	36.28	56.00	-19.72	QP	NEUTRAL
10	1.65	7.05	9.81	0.16	9.87	26.89	46.00	-19.11	Average	NEUTRAL
11	10.56	22.56	10.20	0.27	9.97	43.00	60.00	-17.00	QP	NEUTRAL
12	10.56	15.85	10.20	0.27	9.97	36.29	50.00	-13.71	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 58

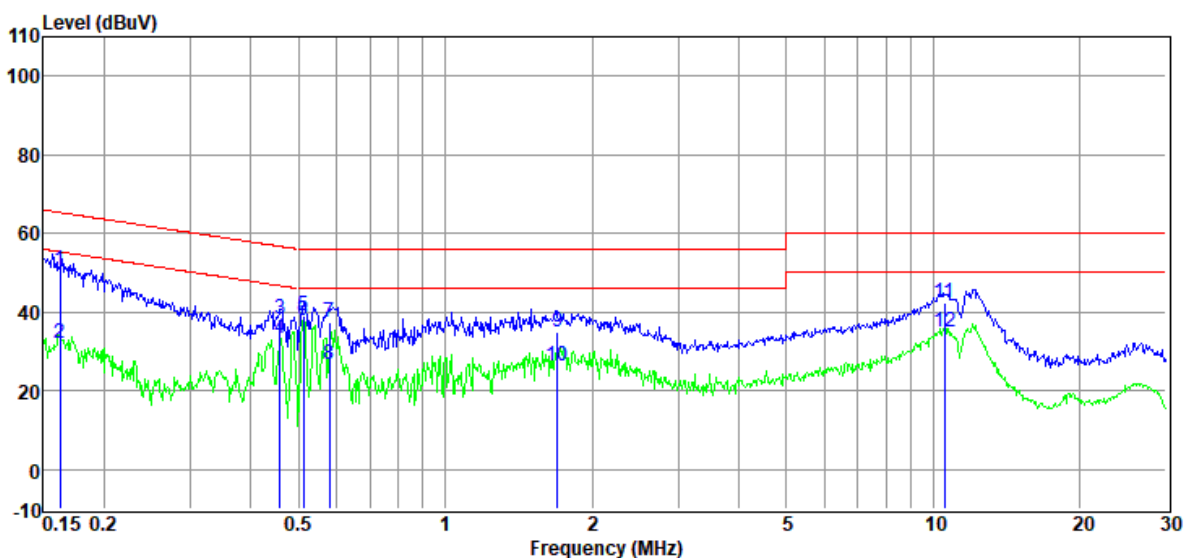

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	30.79	9.71	0.05	9.86	50.41	65.34	-14.93	QP	NEUTRAL
2	0.16	12.46	9.71	0.05	9.86	32.08	55.34	-23.26	Average	NEUTRAL
3	0.46	18.44	9.87	0.08	9.86	38.25	56.71	-18.46	QP	NEUTRAL
4	0.46	13.52	9.87	0.08	9.86	33.33	46.71	-13.38	Average	NEUTRAL
5	0.51	19.18	9.91	0.09	9.86	39.04	56.00	-16.96	QP	NEUTRAL
6	0.51	17.82	9.91	0.09	9.86	37.68	46.00	-8.32	Average	NEUTRAL
7	0.58	17.70	9.89	0.10	9.86	37.55	56.00	-18.45	QP	NEUTRAL
8	0.58	6.79	9.89	0.10	9.86	26.64	46.00	-19.36	Average	NEUTRAL
9	1.70	15.24	9.80	0.16	9.87	35.07	56.00	-20.93	QP	NEUTRAL
10	1.70	6.65	9.80	0.16	9.87	26.48	46.00	-19.52	Average	NEUTRAL
11	10.56	21.81	10.20	0.27	9.97	42.25	60.00	-17.75	QP	NEUTRAL
12	10.56	14.43	10.20	0.27	9.97	34.87	50.00	-15.13	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 60

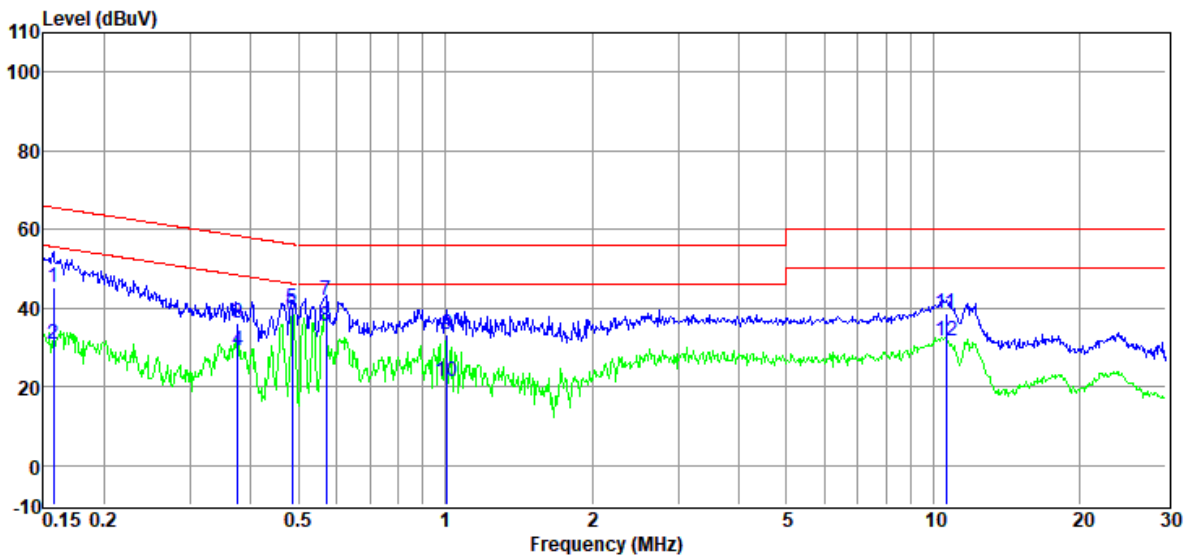

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	25.41	9.85	0.05	9.86	45.17	65.60	-20.43	QP	LINE
2	0.16	10.93	9.85	0.05	9.86	30.69	55.60	-24.91	Average	LINE
3	0.38	16.68	9.68	0.07	9.86	36.29	58.39	-22.10	QP	LINE
4	0.38	9.56	9.68	0.07	9.86	29.17	48.39	-19.22	Average	LINE
5	0.49	20.30	9.76	0.09	9.86	40.01	56.23	-16.22	QP	LINE
6	0.49	18.51	9.76	0.09	9.86	38.22	46.23	-8.01	Average	LINE
7	0.57	21.99	9.89	0.10	9.86	41.84	56.00	-14.16	QP	LINE
8	0.57	15.40	9.89	0.10	9.86	35.25	46.00	-10.75	Average	LINE
9	1.01	13.50	9.97	0.15	9.88	33.50	56.00	-22.50	QP	LINE
10	1.01	1.55	9.97	0.15	9.88	21.55	46.00	-24.45	Average	LINE
11	10.62	18.37	10.22	0.27	9.97	38.83	60.00	-21.17	QP	LINE
12	10.62	11.20	10.22	0.27	9.97	31.66	50.00	-18.34	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 62

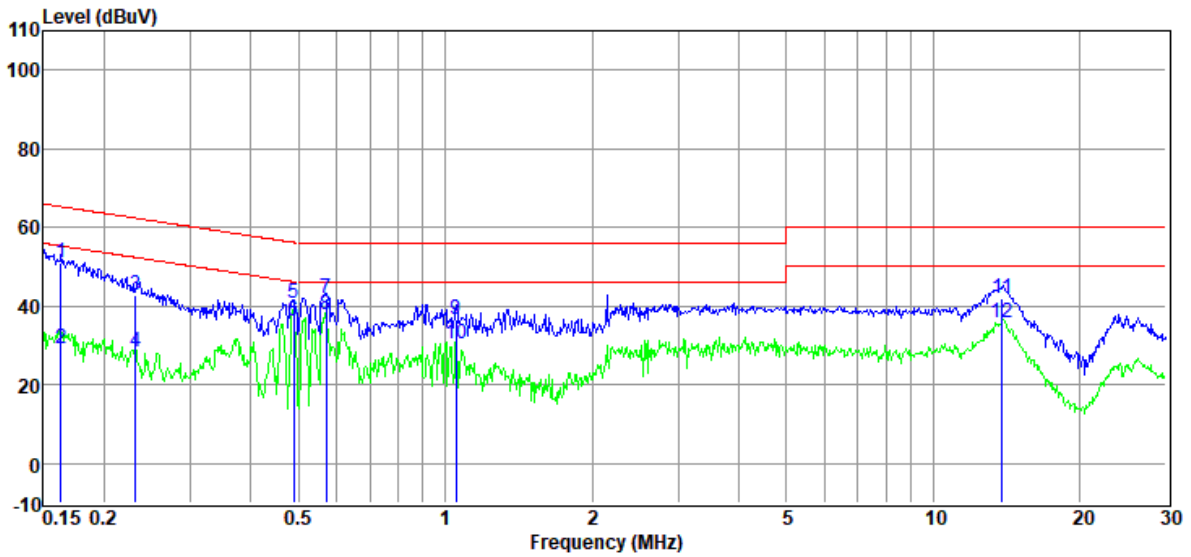

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.16	31.17	9.84	0.05	9.86	50.92	65.30	-14.38	QP	LINE
2	0.16	9.45	9.84	0.05	9.86	29.20	55.30	-26.10	Average	LINE
3	0.23	22.90	9.82	0.06	9.86	42.64	62.39	-19.75	QP	LINE
4	0.23	8.71	9.82	0.06	9.86	28.45	52.39	-23.94	Average	LINE
5	0.49	21.18	9.76	0.09	9.86	40.89	56.19	-15.30	QP	LINE
6	0.49	16.61	9.76	0.09	9.86	36.32	46.19	-9.87	Average	LINE
7	0.57	21.97	9.89	0.10	9.86	41.82	56.00	-14.18	QP	LINE
8	0.57	17.78	9.89	0.10	9.86	37.63	46.00	-8.37	Average	LINE
9	1.05	16.60	9.96	0.15	9.88	36.59	56.00	-19.41	QP	LINE
10	1.05	10.41	9.96	0.15	9.88	30.40	46.00	-15.60	Average	LINE
11	13.84	21.55	10.29	0.33	9.94	42.11	60.00	-17.89	QP	LINE
12	13.84	15.28	10.29	0.33	9.94	35.84	50.00	-14.16	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 64

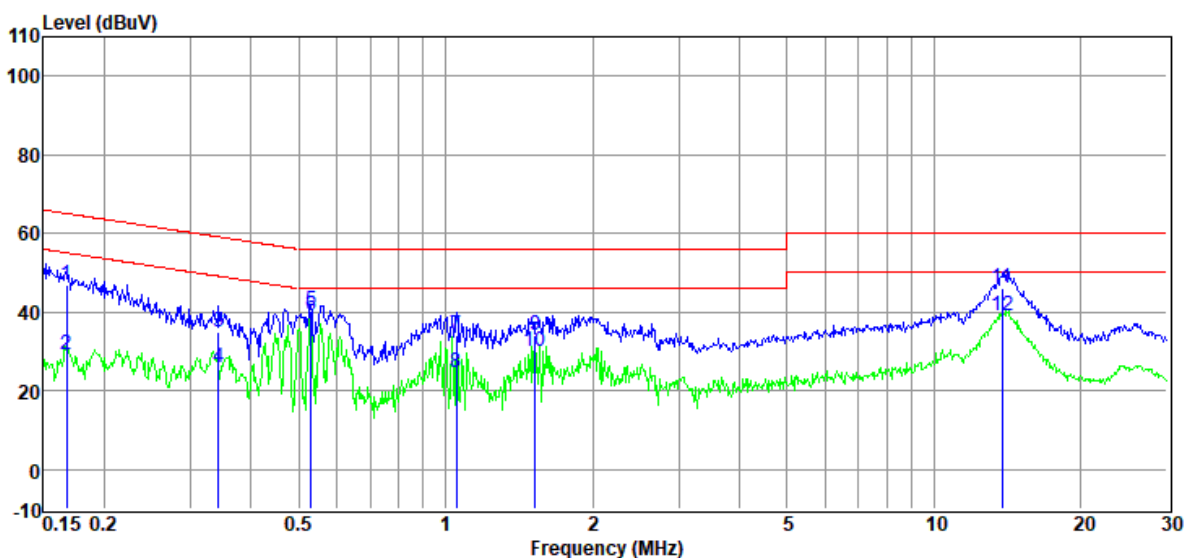

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	27.50	9.69	0.05	9.86	47.10	65.08	-17.98	QP	NEUTRAL
2	0.17	9.69	9.69	0.05	9.86	29.29	55.08	-25.79	Average	NEUTRAL
3	0.34	15.23	9.88	0.07	9.86	35.04	59.13	-24.09	QP	NEUTRAL
4	0.34	5.90	9.88	0.07	9.86	25.71	49.13	-23.42	Average	NEUTRAL
5	0.53	20.49	9.90	0.09	9.86	40.34	56.00	-15.66	QP	NEUTRAL
6	0.53	19.23	9.90	0.09	9.86	39.08	46.00	-6.92	Average	NEUTRAL
7	1.05	14.22	9.93	0.15	9.88	34.18	56.00	-21.82	QP	NEUTRAL
8	1.05	4.62	9.93	0.15	9.88	24.58	46.00	-21.42	Average	NEUTRAL
9	1.53	14.30	9.83	0.16	9.87	34.16	56.00	-21.84	QP	NEUTRAL
10	1.53	10.27	9.83	0.16	9.87	30.13	46.00	-15.87	Average	NEUTRAL
11	13.77	25.41	10.32	0.33	9.94	46.00	60.00	-14.00	QP	NEUTRAL
12	13.77	18.51	10.32	0.33	9.94	39.10	50.00	-10.90	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + USB disk Audio + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 66

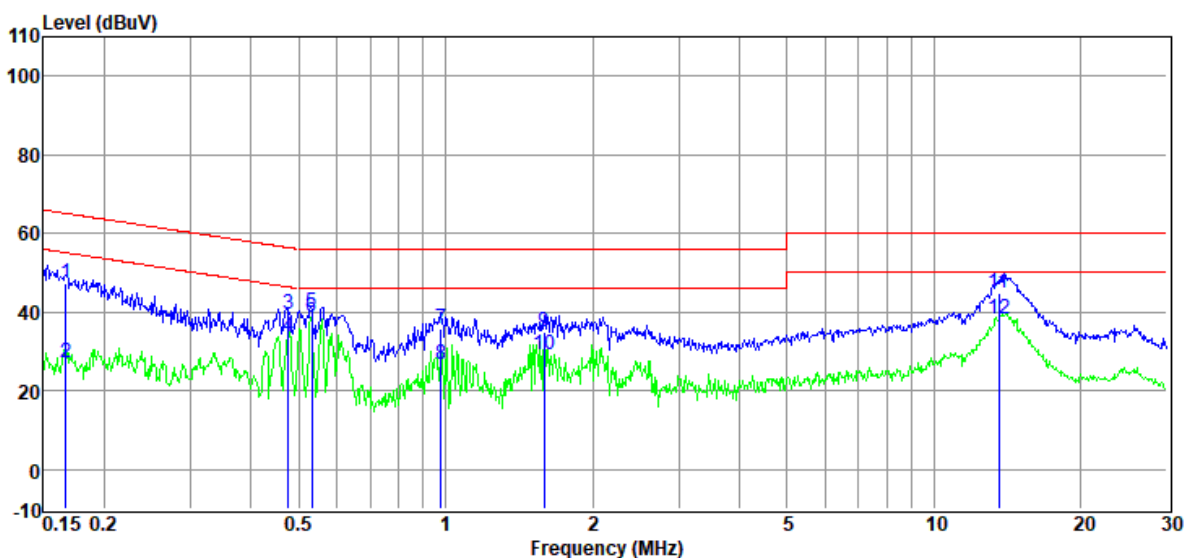

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	27.91	9.69	0.05	9.86	47.51	65.12	-17.61	QP	NEUTRAL
2	0.17	7.56	9.69	0.05	9.86	27.16	55.12	-27.96	Average	NEUTRAL
3	0.48	19.48	9.89	0.09	9.86	39.32	56.41	-17.09	QP	NEUTRAL
4	0.48	13.90	9.89	0.09	9.86	33.74	46.41	-12.67	Average	NEUTRAL
5	0.53	20.17	9.90	0.10	9.86	40.03	56.00	-15.97	QP	NEUTRAL
6	0.53	18.79	9.90	0.10	9.86	38.65	46.00	-7.35	Average	NEUTRAL
7	0.98	15.65	9.93	0.15	9.88	35.61	56.00	-20.39	QP	NEUTRAL
8	0.98	6.85	9.93	0.15	9.88	26.81	46.00	-19.19	Average	NEUTRAL
9	1.59	15.23	9.82	0.16	9.87	35.08	56.00	-20.92	QP	NEUTRAL
10	1.59	9.29	9.82	0.16	9.87	29.14	46.00	-16.86	Average	NEUTRAL
11	13.55	24.31	10.31	0.33	9.94	44.89	60.00	-15.11	QP	NEUTRAL
12	13.55	17.50	10.31	0.33	9.94	38.08	50.00	-11.92	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + USB disk Audio + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 68

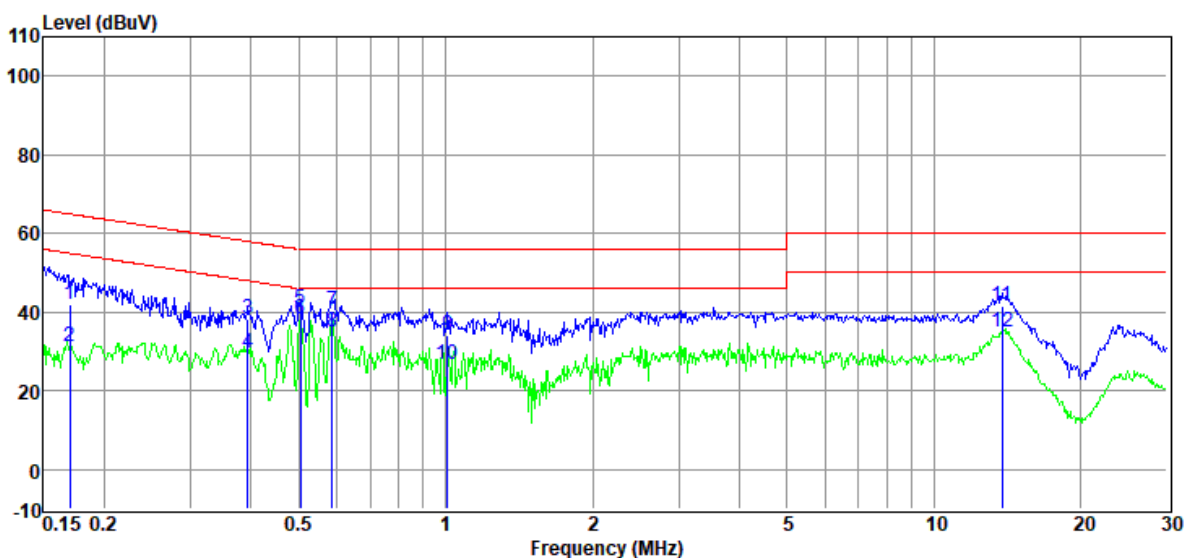

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	22.27	9.84	0.05	9.86	42.02	64.94	-22.92	QP	LINE
2	0.17	11.38	9.84	0.05	9.86	31.13	54.94	-23.81	Average	LINE
3	0.39	18.78	9.69	0.08	9.86	38.41	57.99	-19.58	QP	LINE
4	0.39	9.80	9.69	0.08	9.86	29.43	47.99	-18.56	Average	LINE
5	0.50	20.97	9.78	0.09	9.86	40.70	56.00	-15.30	QP	LINE
6	0.50	18.66	9.78	0.09	9.86	38.39	46.00	-7.61	Average	LINE
7	0.59	20.32	9.92	0.10	9.86	40.20	56.00	-15.80	QP	LINE
8	0.59	15.27	9.92	0.10	9.86	35.15	46.00	-10.85	Average	LINE
9	1.01	14.15	9.97	0.15	9.88	34.15	56.00	-21.85	QP	LINE
10	1.01	6.65	9.97	0.15	9.88	26.65	46.00	-19.35	Average	LINE
11	13.77	20.80	10.29	0.33	9.94	41.36	60.00	-18.64	QP	LINE
12	13.77	14.33	10.29	0.33	9.94	34.89	50.00	-15.11	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + USB disk Audio + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 70

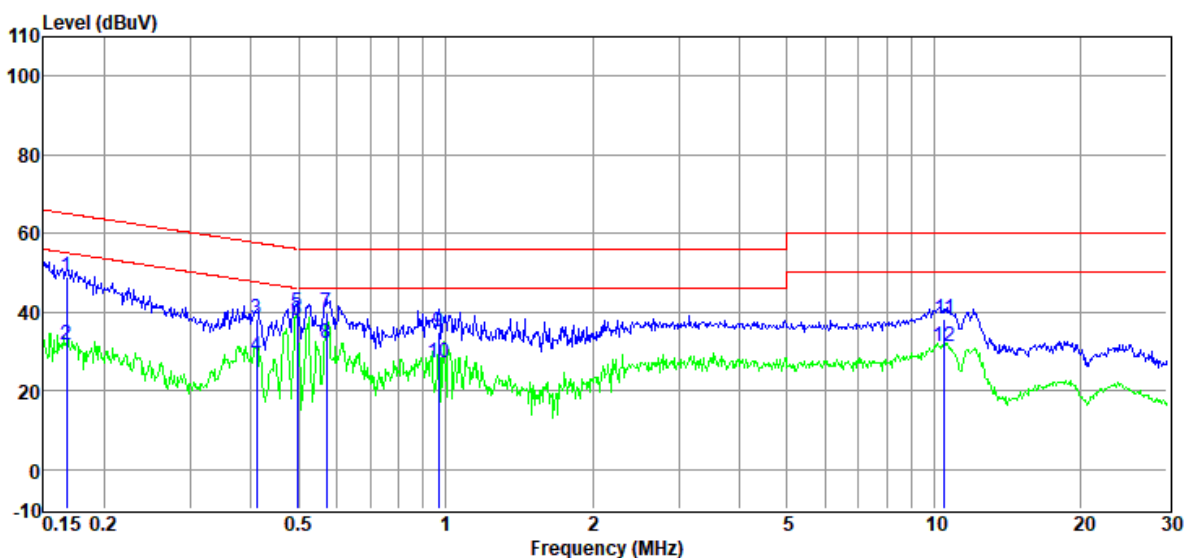

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	29.14	9.84	0.05	9.86	48.89	65.08	-16.19	QP	LINE
2	0.17	11.80	9.84	0.05	9.86	31.55	55.08	-23.53	Average	LINE
3	0.41	18.42	9.70	0.08	9.86	38.06	57.64	-19.58	QP	LINE
4	0.41	9.17	9.70	0.08	9.86	28.81	47.64	-18.83	Average	LINE
5	0.50	20.25	9.77	0.09	9.86	39.97	56.05	-16.08	QP	LINE
6	0.50	18.15	9.77	0.09	9.86	37.87	46.05	-8.18	Average	LINE
7	0.57	19.95	9.89	0.10	9.86	39.80	56.00	-16.20	QP	LINE
8	0.57	12.30	9.89	0.10	9.86	32.15	46.00	-13.85	Average	LINE
9	0.97	15.05	9.93	0.15	9.88	35.01	56.00	-20.99	QP	LINE
10	0.97	7.30	9.93	0.15	9.88	27.26	46.00	-18.74	Average	LINE
11	10.51	17.69	10.21	0.27	9.97	38.14	60.00	-21.86	QP	LINE
12	10.51	10.60	10.21	0.27	9.97	31.05	50.00	-18.95	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + USB disk Audio + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 72

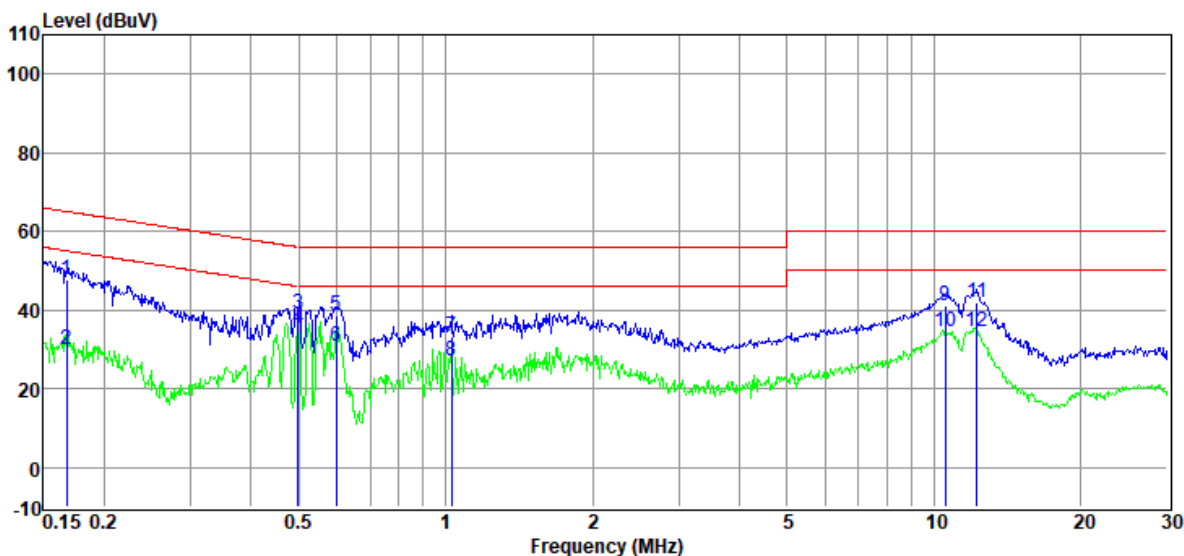

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	28.00	9.69	0.05	9.86	47.60	65.08	-17.48	QP	NEUTRAL
2	0.17	10.47	9.69	0.05	9.86	30.07	55.08	-25.01	Average	NEUTRAL
3	0.50	19.28	9.91	0.09	9.86	39.14	56.01	-16.87	QP	NEUTRAL
4	0.50	15.63	9.91	0.09	9.86	35.49	46.01	-10.52	Average	NEUTRAL
5	0.60	18.78	9.88	0.11	9.87	38.64	56.00	-17.36	QP	NEUTRAL
6	0.60	10.97	9.88	0.11	9.87	30.83	46.00	-15.17	Average	NEUTRAL
7	1.03	13.26	9.93	0.15	9.88	33.22	56.00	-22.78	QP	NEUTRAL
8	1.03	7.02	9.93	0.15	9.88	26.98	46.00	-19.02	Average	NEUTRAL
9	10.56	20.87	10.20	0.27	9.97	41.31	60.00	-18.69	QP	NEUTRAL
10	10.56	14.01	10.20	0.27	9.97	34.45	50.00	-15.55	Average	NEUTRAL
11	12.25	21.43	10.27	0.30	9.95	41.95	60.00	-18.05	QP	NEUTRAL
12	12.25	14.21	10.27	0.30	9.95	34.73	50.00	-15.27	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + 5V/3A load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 74

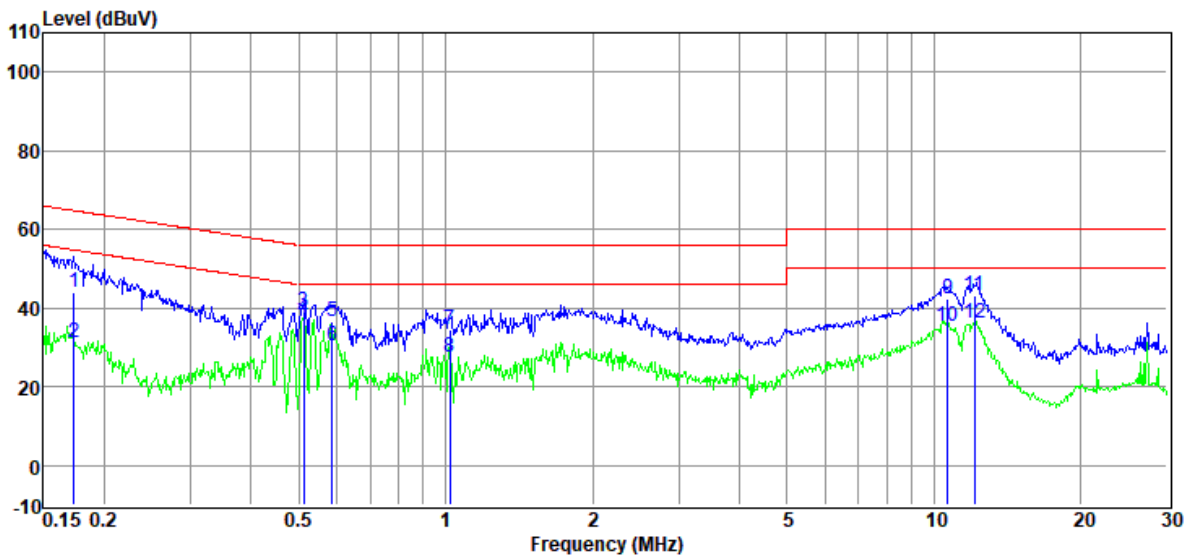

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)		
1	0.17	24.29	9.70	0.05	9.86	43.90	64.81	-20.91	QP	NEUTRAL
2	0.17	11.79	9.70	0.05	9.86	31.40	54.81	-23.41	Average	NEUTRAL
3	0.51	19.19	9.91	0.09	9.86	39.05	56.00	-16.95	QP	NEUTRAL
4	0.51	17.40	9.91	0.09	9.86	37.26	46.00	-8.74	Average	NEUTRAL
5	0.59	16.66	9.88	0.10	9.86	36.50	56.00	-19.50	QP	NEUTRAL
6	0.59	10.59	9.88	0.10	9.86	30.43	46.00	-15.57	Average	NEUTRAL
7	1.02	14.59	9.93	0.15	9.88	34.55	56.00	-21.45	QP	NEUTRAL
8	1.02	7.45	9.93	0.15	9.88	27.41	46.00	-18.59	Average	NEUTRAL
9	10.68	21.86	10.20	0.27	9.97	42.30	60.00	-17.70	QP	NEUTRAL
10	10.68	14.87	10.20	0.27	9.97	35.31	50.00	-14.69	Average	NEUTRAL
11	12.12	22.50	10.26	0.30	9.96	43.02	60.00	-16.98	QP	NEUTRAL
12	12.12	15.73	10.26	0.30	9.96	36.25	50.00	-13.75	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + 5V/3A load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 76

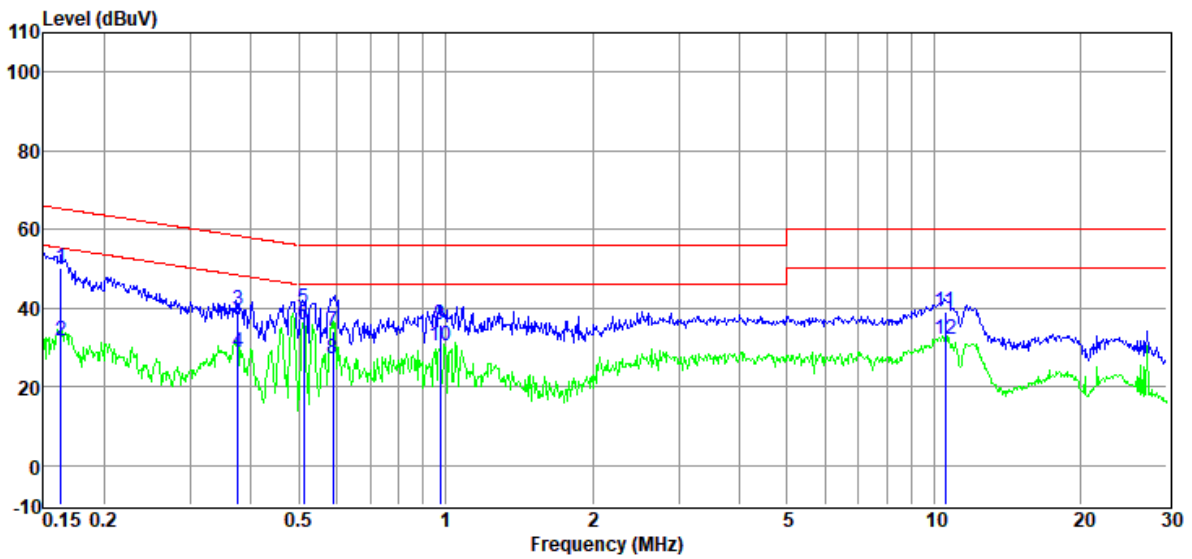

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	30.65	9.84	0.05	9.86	50.40	65.30	-14.90	QP	LINE
2	0.16	11.92	9.84	0.05	9.86	31.67	55.30	-23.63	Average	LINE
3	0.38	19.89	9.68	0.07	9.86	39.50	58.39	-18.89	QP	LINE
4	0.38	9.12	9.68	0.07	9.86	28.73	48.39	-19.66	Average	LINE
5	0.51	20.30	9.79	0.09	9.86	40.04	56.00	-15.96	QP	LINE
6	0.51	15.93	9.79	0.09	9.86	35.67	46.00	-10.33	Average	LINE
7	0.59	14.06	9.92	0.10	9.86	33.94	56.00	-22.06	QP	LINE
8	0.59	7.41	9.92	0.10	9.86	27.29	46.00	-18.71	Average	LINE
9	0.97	15.96	9.94	0.15	9.88	35.93	56.00	-20.07	QP	LINE
10	0.97	10.33	9.94	0.15	9.88	30.30	46.00	-15.70	Average	LINE
11	10.56	18.49	10.22	0.27	9.97	38.95	60.00	-21.05	QP	LINE
12	10.56	11.57	10.22	0.27	9.97	32.03	50.00	-17.97	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + 5V/3A load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 78

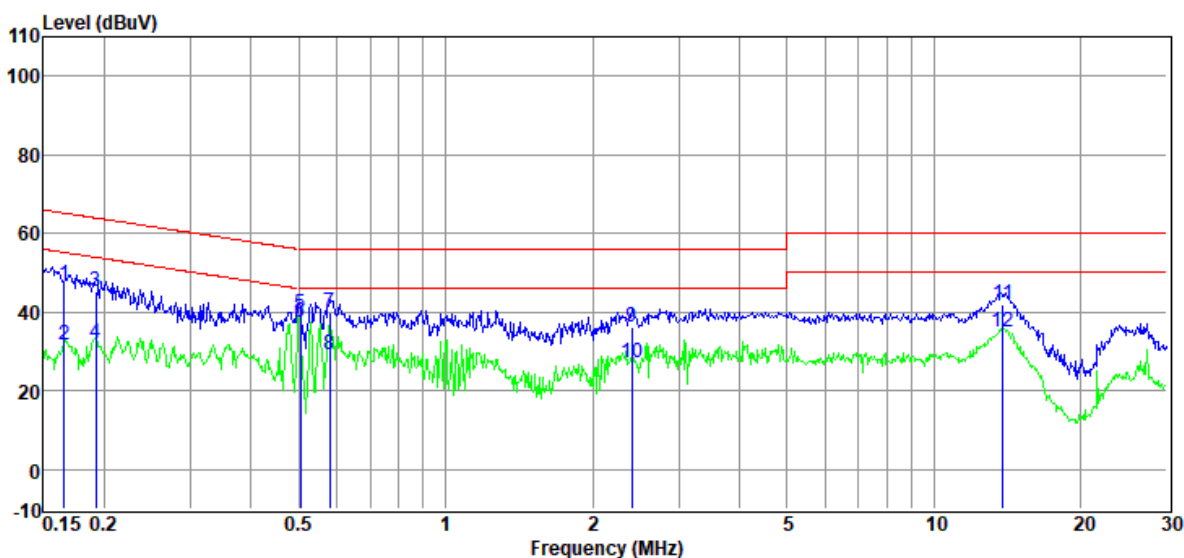

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	27.00	9.84	0.05	9.86	46.75	65.16	-18.41	QP	LINE
2	0.17	12.04	9.84	0.05	9.86	31.79	55.16	-23.37	Average	LINE
3	0.19	25.48	9.82	0.06	9.86	45.22	63.93	-18.71	QP	LINE
4	0.19	12.20	9.82	0.06	9.86	31.94	53.93	-21.99	Average	LINE
5	0.50	19.63	9.78	0.09	9.86	39.36	56.00	-16.64	QP	LINE
6	0.50	17.72	9.78	0.09	9.86	37.45	46.00	-8.55	Average	LINE
7	0.58	20.19	9.91	0.10	9.86	40.06	56.00	-15.94	QP	LINE
8	0.58	9.37	9.91	0.10	9.86	29.24	46.00	-16.76	Average	LINE
9	2.41	16.33	9.85	0.17	9.87	36.22	56.00	-19.78	QP	LINE
10	2.41	7.10	9.85	0.17	9.87	26.99	46.00	-19.01	Average	LINE
11	13.84	21.41	10.29	0.33	9.94	41.97	60.00	-18.03	QP	LINE
12	13.84	14.22	10.29	0.33	9.94	34.78	50.00	-15.22	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + 5V/3A load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 80

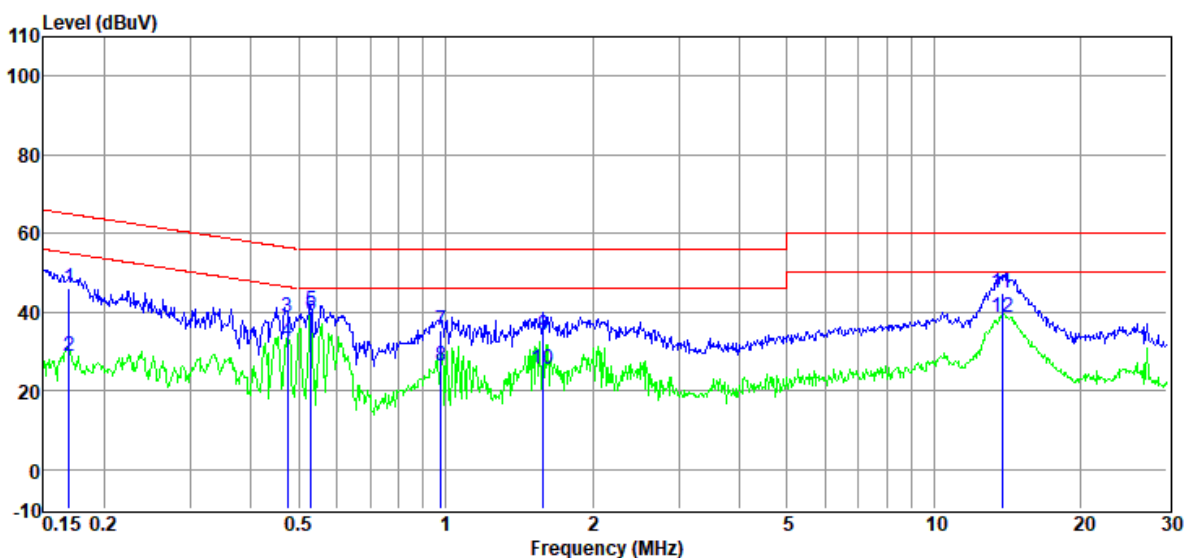

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	26.55	9.68	0.05	9.86	46.14	64.99	-18.85	QP	NEUTRAL
2	0.17	9.23	9.68	0.05	9.86	28.82	54.99	-26.17	Average	NEUTRAL
3	0.47	18.92	9.88	0.09	9.86	38.75	56.45	-17.70	QP	NEUTRAL
4	0.47	12.45	9.88	0.09	9.86	32.28	46.45	-14.17	Average	NEUTRAL
5	0.53	20.36	9.90	0.09	9.86	40.21	56.00	-15.79	QP	NEUTRAL
6	0.53	19.16	9.90	0.09	9.86	39.01	46.00	-6.99	Average	NEUTRAL
7	0.98	15.29	9.93	0.15	9.88	35.25	56.00	-20.75	QP	NEUTRAL
8	0.98	6.45	9.93	0.15	9.88	26.41	46.00	-19.59	Average	NEUTRAL
9	1.59	14.19	9.82	0.16	9.87	34.04	56.00	-21.96	QP	NEUTRAL
10	1.59	5.67	9.82	0.16	9.87	25.52	46.00	-20.48	Average	NEUTRAL
11	13.77	24.16	10.32	0.33	9.94	44.75	60.00	-15.25	QP	NEUTRAL
12	13.77	18.16	10.32	0.33	9.94	38.75	50.00	-11.25	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 82

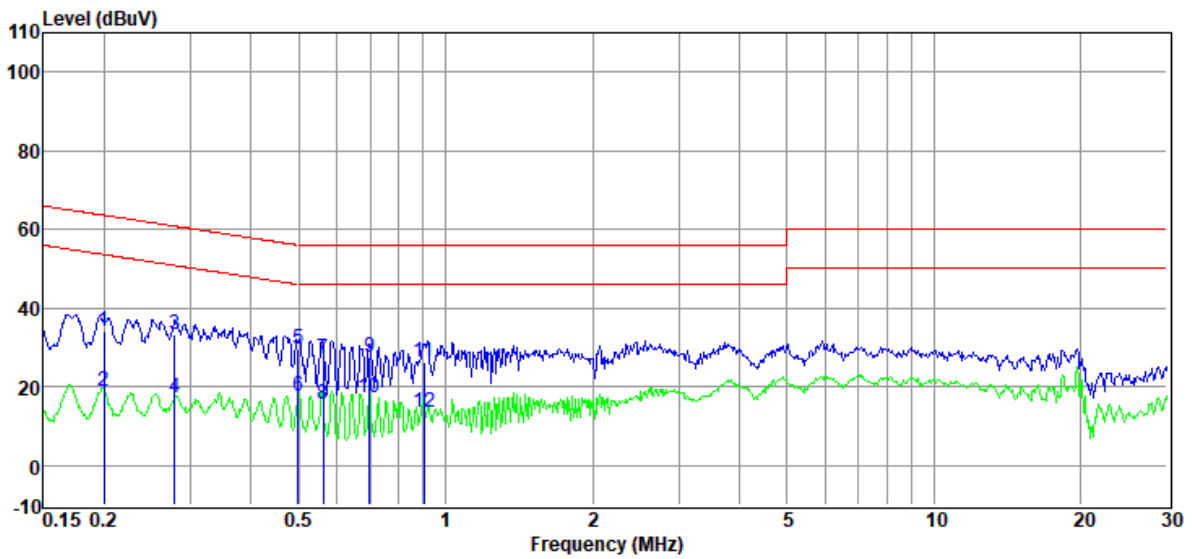

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.20	14.38	9.83	0.06	9.86	34.13	63.62	-29.49	QP	NEUTRAL
2	0.20	-0.76	9.83	0.06	9.86	18.99	53.62	-34.63	Average	NEUTRAL
3	0.28	13.46	9.73	0.06	9.86	33.11	60.85	-27.74	QP	NEUTRAL
4	0.28	-2.60	9.73	0.06	9.86	17.05	50.85	-33.80	Average	NEUTRAL
5	0.50	9.56	9.91	0.09	9.86	29.42	56.01	-26.59	QP	NEUTRAL
6	0.50	-2.11	9.91	0.09	9.86	17.75	46.01	-28.26	Average	NEUTRAL
7	0.56	7.20	9.89	0.10	9.86	27.05	56.00	-28.95	QP	NEUTRAL
8	0.56	-4.08	9.89	0.10	9.86	15.77	46.00	-30.23	Average	NEUTRAL
9	0.70	7.62	9.93	0.12	9.87	27.54	56.00	-28.46	QP	NEUTRAL
10	0.70	-2.56	9.93	0.12	9.87	17.36	46.00	-28.64	Average	NEUTRAL
11	0.90	6.40	9.88	0.14	9.88	26.30	56.00	-29.70	QP	NEUTRAL
12	0.90	-6.29	9.88	0.14	9.88	13.61	46.00	-32.39	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 84

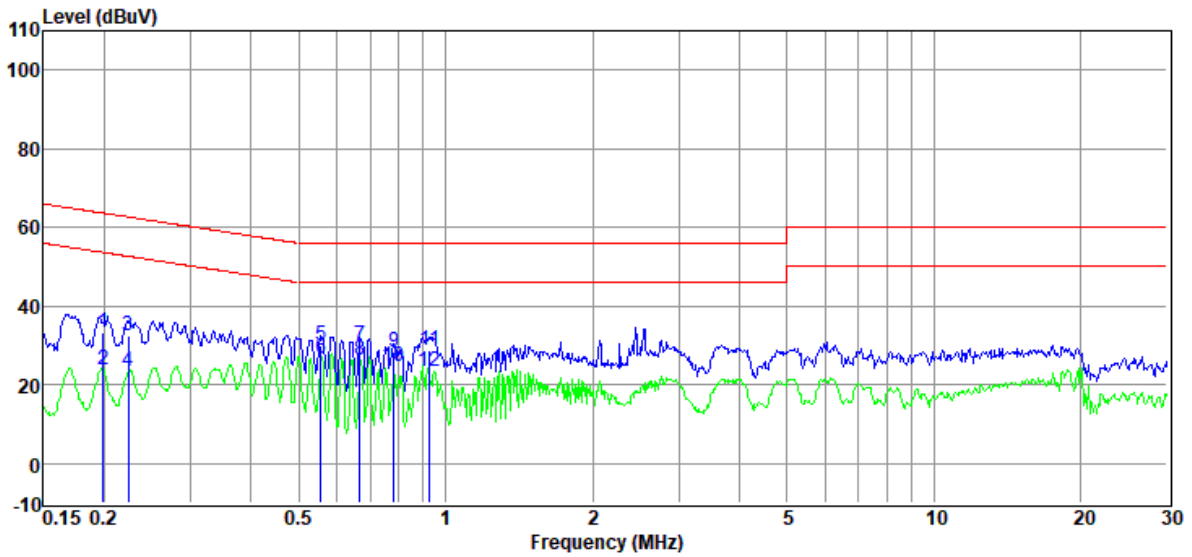

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.20	13.53	9.82	0.06	9.86	33.27	63.67	-30.40	QP	LINE
2	0.20	4.18	9.82	0.06	9.86	23.92	53.67	-29.75	Average	LINE
3	0.22	12.83	9.82	0.06	9.86	32.57	62.66	-30.09	QP	LINE
4	0.22	3.51	9.82	0.06	9.86	23.25	52.66	-29.41	Average	LINE
5	0.56	10.19	9.87	0.10	9.86	30.02	56.00	-25.98	QP	LINE
6	0.56	6.74	9.87	0.10	9.86	26.57	46.00	-19.43	Average	LINE
7	0.67	9.88	9.95	0.11	9.87	29.81	56.00	-26.19	QP	LINE
8	0.67	6.29	9.95	0.11	9.87	26.22	46.00	-19.78	Average	LINE
9	0.78	8.70	9.76	0.13	9.87	28.46	56.00	-27.54	QP	LINE
10	0.78	5.02	9.76	0.13	9.87	24.78	46.00	-21.22	Average	LINE
11	0.93	8.75	9.89	0.14	9.88	28.66	56.00	-27.34	QP	LINE
12	0.93	3.36	9.89	0.14	9.88	23.27	46.00	-22.73	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Aux in + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 86

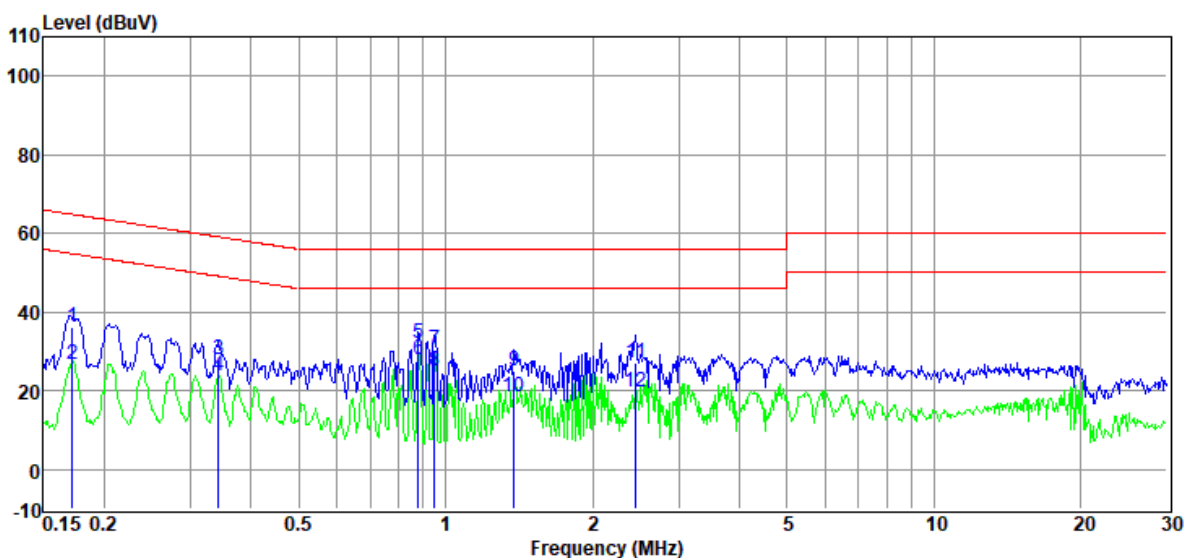

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	16.42	9.84	0.05	9.86	36.17	64.86	-28.69	QP	LINE
2	0.17	6.84	9.84	0.05	9.86	26.59	54.86	-28.27	Average	LINE
3	0.34	8.20	9.67	0.07	9.86	27.80	59.13	-31.33	QP	LINE
4	0.34	4.24	9.67	0.07	9.86	23.84	49.13	-25.29	Average	LINE
5	0.88	12.38	9.83	0.14	9.88	32.23	56.00	-23.77	QP	LINE
6	0.88	7.96	9.83	0.14	9.88	27.81	46.00	-18.19	Average	LINE
7	0.95	10.59	9.91	0.15	9.88	30.53	56.00	-25.47	QP	LINE
8	0.95	5.04	9.91	0.15	9.88	24.98	46.00	-21.02	Average	LINE
9	1.38	5.12	9.89	0.16	9.88	25.05	56.00	-30.95	QP	LINE
10	1.38	-1.52	9.89	0.16	9.88	18.41	46.00	-27.59	Average	LINE
11	2.45	7.31	9.85	0.17	9.87	27.20	56.00	-28.80	QP	LINE
12	2.45	-0.09	9.85	0.17	9.87	19.80	46.00	-26.20	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 88

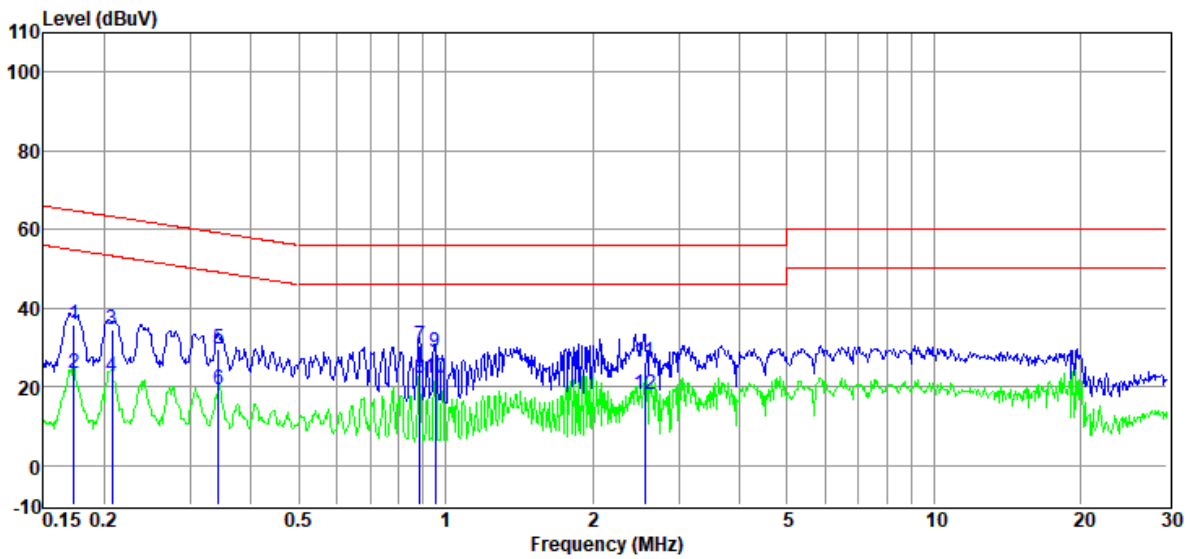

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	16.28	9.70	0.05	9.86	35.89	64.81	-28.92	QP	NEUTRAL
2	0.17	3.76	9.70	0.05	9.86	23.37	54.81	-31.44	Average	NEUTRAL
3	0.21	14.92	9.83	0.06	9.86	34.67	63.32	-28.65	QP	NEUTRAL
4	0.21	2.81	9.83	0.06	9.86	22.56	53.32	-30.76	Average	NEUTRAL
5	0.34	9.67	9.88	0.07	9.86	29.48	59.13	-29.65	QP	NEUTRAL
6	0.34	-0.46	9.88	0.07	9.86	19.35	49.13	-29.78	Average	NEUTRAL
7	0.88	10.50	9.86	0.14	9.88	30.38	56.00	-25.62	QP	NEUTRAL
8	0.88	2.42	9.86	0.14	9.88	22.30	46.00	-23.70	Average	NEUTRAL
9	0.95	8.89	9.91	0.15	9.88	28.83	56.00	-27.17	QP	NEUTRAL
10	0.95	2.12	9.91	0.15	9.88	22.06	46.00	-23.94	Average	NEUTRAL
11	2.55	6.38	9.80	0.17	9.86	26.21	56.00	-29.79	QP	NEUTRAL
12	2.55	-1.85	9.80	0.17	9.86	17.98	46.00	-28.02	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 90

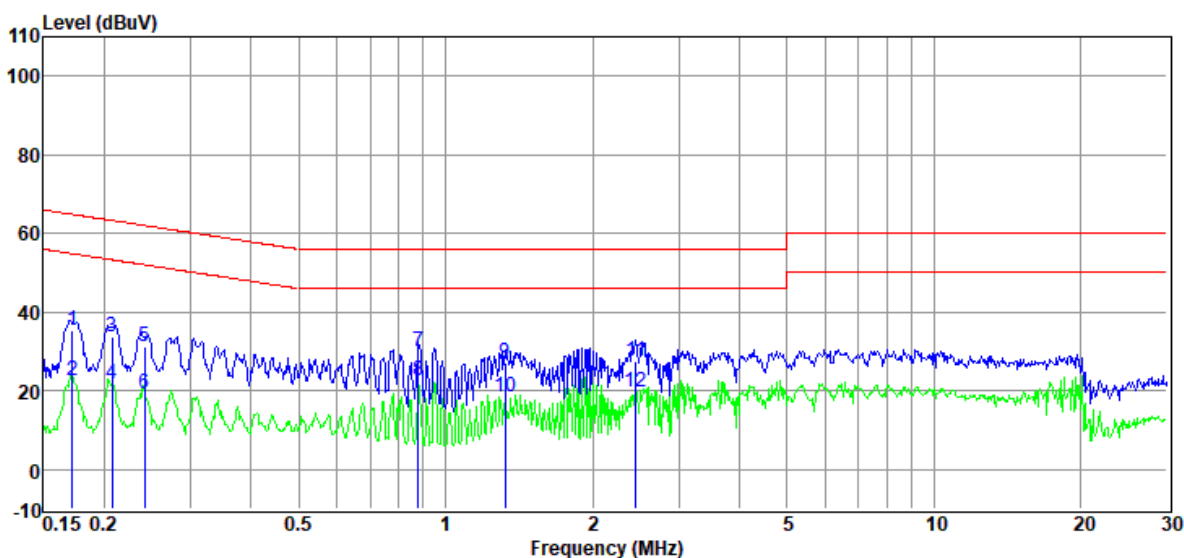

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	15.56	9.69	0.05	9.86	35.16	64.86	-29.70	QP	NEUTRAL
2	0.17	3.11	9.69	0.05	9.86	22.71	54.86	-32.15	Average	NEUTRAL
3	0.21	13.97	9.83	0.06	9.86	33.72	63.32	-29.60	QP	NEUTRAL
4	0.21	1.94	9.83	0.06	9.86	21.69	53.32	-31.63	Average	NEUTRAL
5	0.24	11.30	9.84	0.06	9.86	31.06	62.04	-30.98	QP	NEUTRAL
6	0.24	-0.37	9.84	0.06	9.86	19.39	52.04	-32.65	Average	NEUTRAL
7	0.88	10.05	9.86	0.14	9.88	29.93	56.00	-26.07	QP	NEUTRAL
8	0.88	2.56	9.86	0.14	9.88	22.44	46.00	-23.56	Average	NEUTRAL
9	1.32	7.17	9.87	0.16	9.88	27.08	56.00	-28.92	QP	NEUTRAL
10	1.32	-1.65	9.87	0.16	9.88	18.26	46.00	-27.74	Average	NEUTRAL
11	2.45	7.89	9.79	0.17	9.87	27.72	56.00	-28.28	QP	NEUTRAL
12	2.45	-0.26	9.79	0.17	9.87	19.57	46.00	-26.43	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 92

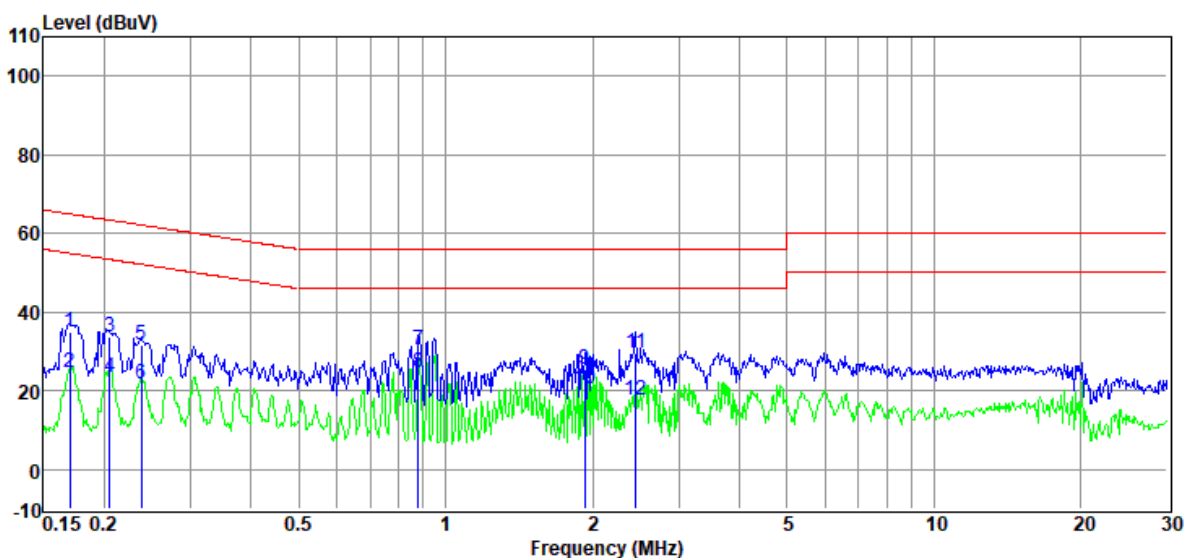

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	15.20	9.84	0.05	9.86	34.95	64.94	-29.99	QP	LINE
2	0.17	5.06	9.84	0.05	9.86	24.81	54.94	-30.13	Average	LINE
3	0.21	13.87	9.82	0.06	9.86	33.61	63.40	-29.79	QP	LINE
4	0.21	3.81	9.82	0.06	9.86	23.55	53.40	-29.85	Average	LINE
5	0.24	11.81	9.82	0.06	9.86	31.55	62.17	-30.62	QP	LINE
6	0.24	2.15	9.82	0.06	9.86	21.89	52.17	-30.28	Average	LINE
7	0.88	10.72	9.83	0.14	9.88	30.57	56.00	-25.43	QP	LINE
8	0.88	4.91	9.83	0.14	9.88	24.76	46.00	-21.24	Average	LINE
9	1.93	5.63	9.80	0.17	9.87	25.47	56.00	-30.53	QP	LINE
10	1.93	0.70	9.80	0.17	9.87	20.54	46.00	-25.46	Average	LINE
11	2.45	9.54	9.85	0.17	9.87	29.43	56.00	-26.57	QP	LINE
12	2.45	-2.12	9.85	0.17	9.87	17.77	46.00	-28.23	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 94

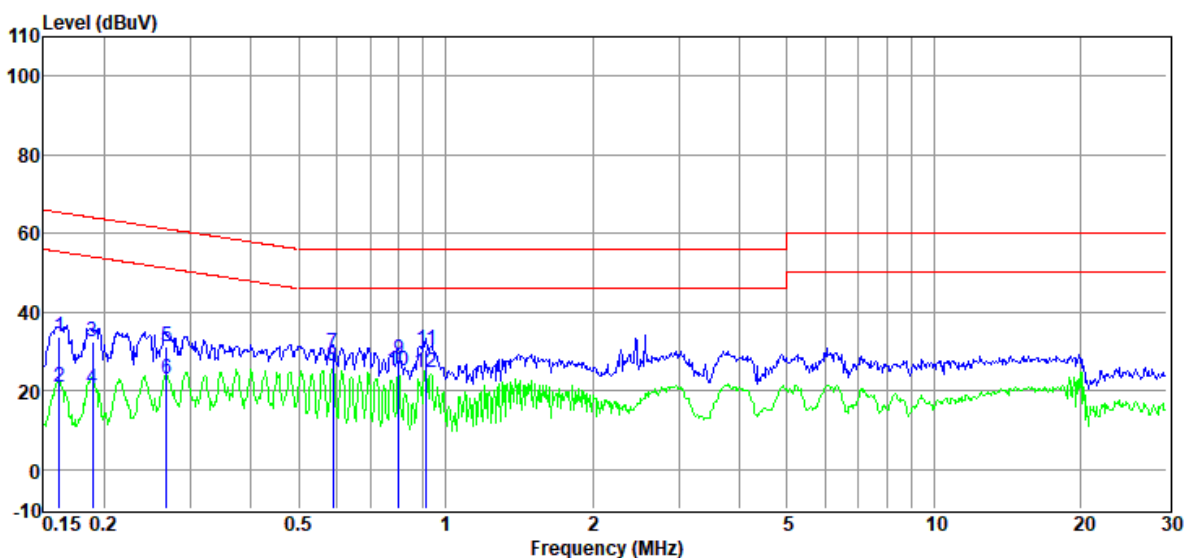

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	13.83	9.84	0.05	9.86	33.58	65.38	-31.80	QP	LINE
2	0.16	1.15	9.84	0.05	9.86	20.90	55.38	-34.48	Average	LINE
3	0.19	12.71	9.83	0.06	9.86	32.46	64.06	-31.60	QP	LINE
4	0.19	0.94	9.83	0.06	9.86	20.69	54.06	-33.37	Average	LINE
5	0.27	11.46	9.77	0.06	9.86	31.15	61.16	-30.01	QP	LINE
6	0.27	3.23	9.77	0.06	9.86	22.92	51.16	-28.24	Average	LINE
7	0.59	9.89	9.92	0.10	9.86	29.77	56.00	-26.23	QP	LINE
8	0.59	6.25	9.92	0.10	9.86	26.13	46.00	-19.87	Average	LINE
9	0.80	8.41	9.72	0.13	9.87	28.13	56.00	-27.87	QP	LINE
10	0.80	5.14	9.72	0.13	9.87	24.86	46.00	-21.14	Average	LINE
11	0.91	10.71	9.87	0.14	9.88	30.60	56.00	-25.40	QP	LINE
12	0.91	4.85	9.87	0.14	9.88	24.74	46.00	-21.26	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 96

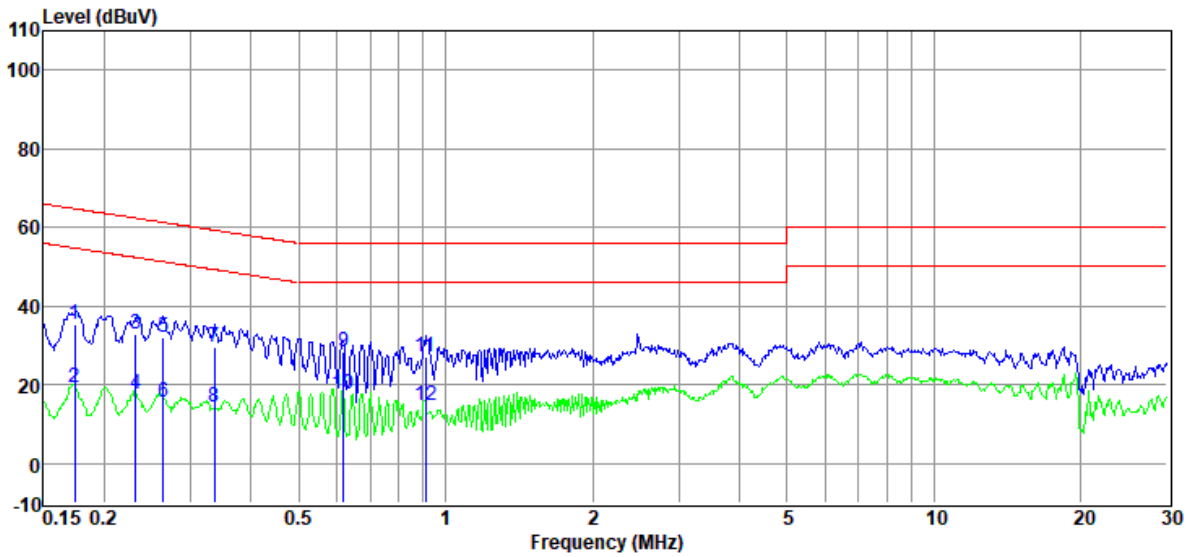

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	15.74	9.70	0.06	9.86	35.36	64.77	-29.41	QP	NEUTRAL
2	0.17	-0.20	9.70	0.06	9.86	19.42	54.77	-35.35	Average	NEUTRAL
3	0.23	12.93	9.84	0.06	9.86	32.69	62.39	-29.70	QP	NEUTRAL
4	0.23	-2.23	9.84	0.06	9.86	17.53	52.39	-34.86	Average	NEUTRAL
5	0.26	12.22	9.78	0.06	9.86	31.92	61.29	-29.37	QP	NEUTRAL
6	0.26	-3.98	9.78	0.06	9.86	15.72	51.29	-35.57	Average	NEUTRAL
7	0.34	9.61	9.85	0.07	9.86	29.39	59.31	-29.92	QP	NEUTRAL
8	0.34	-5.57	9.85	0.07	9.86	14.21	49.31	-35.10	Average	NEUTRAL
9	0.62	8.30	9.89	0.11	9.87	28.17	56.00	-27.83	QP	NEUTRAL
10	0.62	-2.27	9.89	0.11	9.87	17.60	46.00	-28.40	Average	NEUTRAL
11	0.91	7.30	9.88	0.14	9.88	27.20	56.00	-28.80	QP	NEUTRAL
12	0.91	-5.10	9.88	0.14	9.88	14.80	46.00	-31.20	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 98

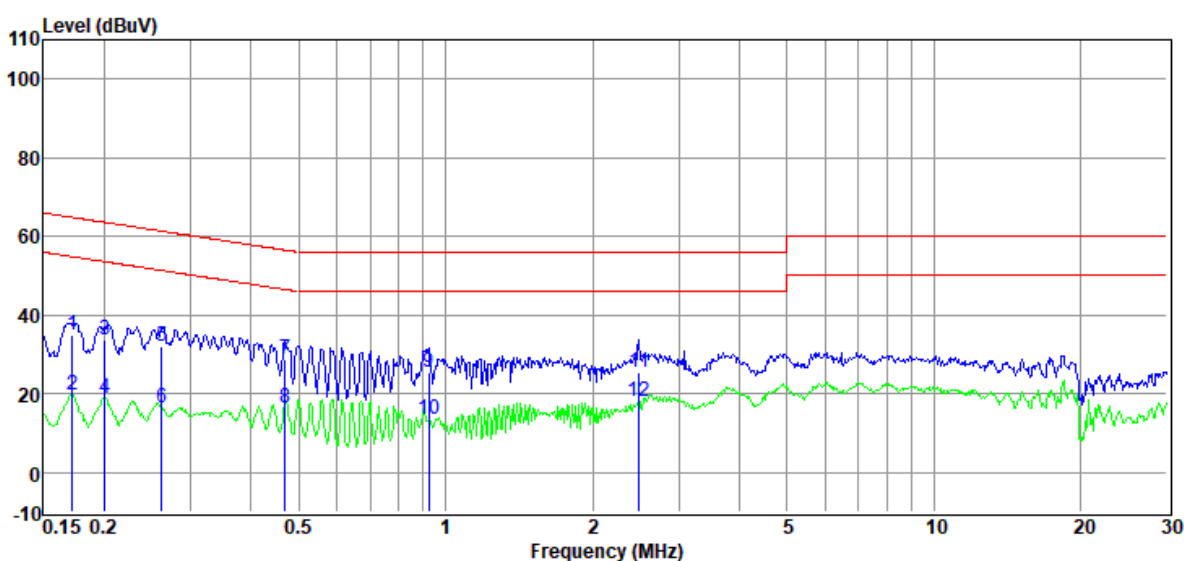

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	15.39	9.69	0.05	9.86	34.99	64.86	-29.87	QP	NEUTRAL
2	0.17	0.07	9.69	0.05	9.86	19.67	54.86	-35.19	Average	NEUTRAL
3	0.20	14.06	9.83	0.06	9.86	33.81	63.58	-29.77	QP	NEUTRAL
4	0.20	-0.95	9.83	0.06	9.86	18.80	53.58	-34.78	Average	NEUTRAL
5	0.26	12.46	9.79	0.06	9.86	32.17	61.38	-29.21	QP	NEUTRAL
6	0.26	-3.42	9.79	0.06	9.86	16.29	51.38	-35.09	Average	NEUTRAL
7	0.47	9.12	9.88	0.09	9.86	28.95	56.54	-27.59	QP	NEUTRAL
8	0.47	-3.26	9.88	0.09	9.86	16.57	46.54	-29.97	Average	NEUTRAL
9	0.92	5.47	9.89	0.14	9.88	25.38	56.00	-30.62	QP	NEUTRAL
10	0.92	-6.43	9.89	0.14	9.88	13.48	46.00	-32.52	Average	NEUTRAL
11	2.49	5.74	9.79	0.17	9.87	25.57	56.00	-30.43	QP	NEUTRAL
12	2.49	-1.97	9.79	0.17	9.87	17.86	46.00	-28.14	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 100

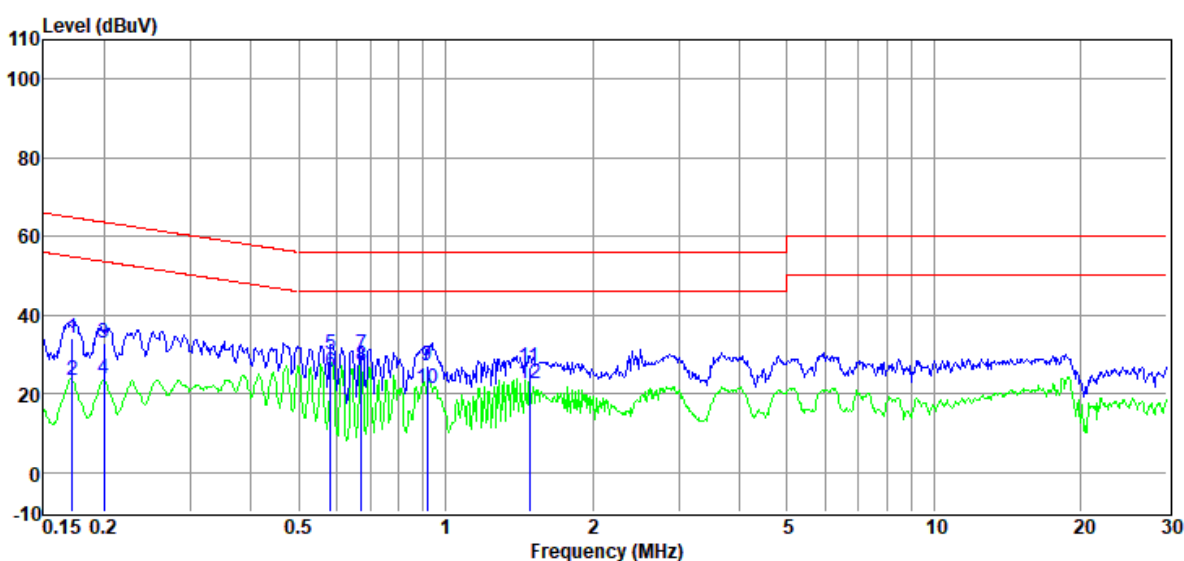

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	14.53	9.84	0.05	9.86	34.28	64.86	-30.58	QP	LINE
2	0.17	3.82	9.84	0.05	9.86	23.57	54.86	-31.29	Average	LINE
3	0.20	13.22	9.82	0.06	9.86	32.96	63.62	-30.66	QP	LINE
4	0.20	3.97	9.82	0.06	9.86	23.71	53.62	-29.91	Average	LINE
5	0.58	10.03	9.91	0.10	9.86	29.90	56.00	-26.10	QP	LINE
6	0.58	5.44	9.91	0.10	9.86	25.31	46.00	-20.69	Average	LINE
7	0.67	10.16	9.95	0.12	9.87	30.10	56.00	-25.90	QP	LINE
8	0.67	7.29	9.95	0.12	9.87	27.23	46.00	-18.77	Average	LINE
9	0.92	7.42	9.87	0.14	9.88	27.31	56.00	-28.69	QP	LINE
10	0.92	1.57	9.87	0.14	9.88	21.46	46.00	-24.54	Average	LINE
11	1.49	6.97	9.87	0.16	9.87	26.87	56.00	-29.13	QP	LINE
12	1.49	2.72	9.87	0.16	9.87	22.62	46.00	-23.38	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 102

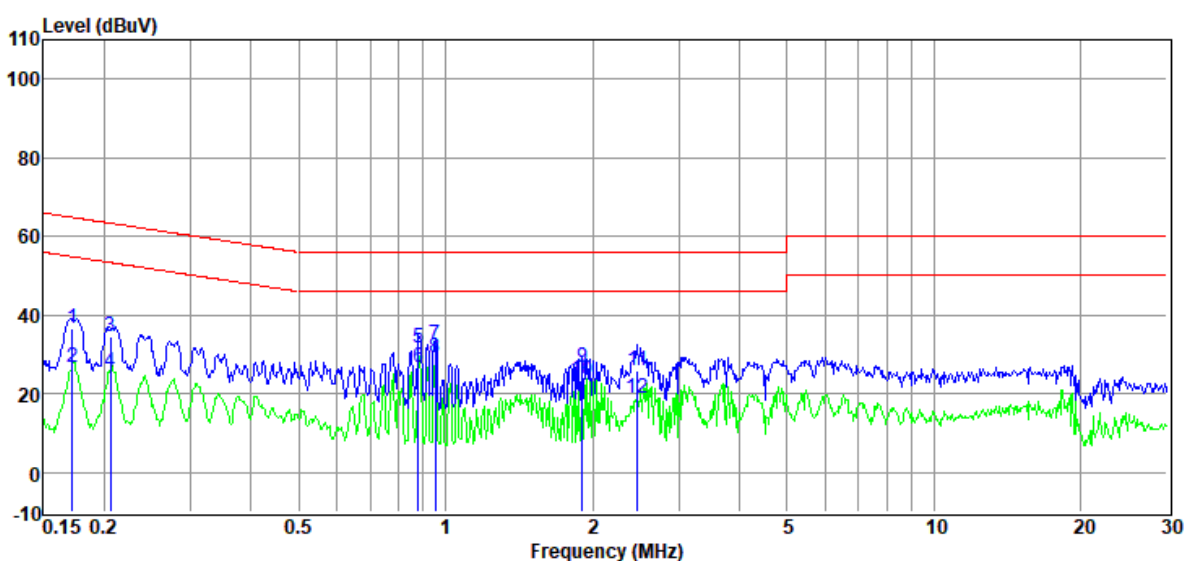

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	16.80	9.84	0.05	9.86	36.55	64.86	-28.31	QP	LINE
2	0.17	6.85	9.84	0.05	9.86	26.60	54.86	-28.26	Average	LINE
3	0.21	14.93	9.82	0.06	9.86	34.67	63.36	-28.69	QP	LINE
4	0.21	5.89	9.82	0.06	9.86	25.63	53.36	-27.73	Average	LINE
5	0.88	11.95	9.83	0.14	9.88	31.80	56.00	-24.20	QP	LINE
6	0.88	6.80	9.83	0.14	9.88	26.65	46.00	-19.35	Average	LINE
7	0.95	12.41	9.92	0.15	9.88	32.36	56.00	-23.64	QP	LINE
8	0.95	9.33	9.92	0.15	9.88	29.28	46.00	-16.72	Average	LINE
9	1.91	6.78	9.80	0.17	9.87	26.62	56.00	-29.38	QP	LINE
10	1.91	3.37	9.80	0.17	9.87	23.21	46.00	-22.79	Average	LINE
11	2.47	5.81	9.85	0.17	9.87	25.70	56.00	-30.30	QP	LINE
12	2.47	-0.90	9.85	0.17	9.87	18.99	46.00	-27.01	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The first: FG4CELL21201

Data: 104

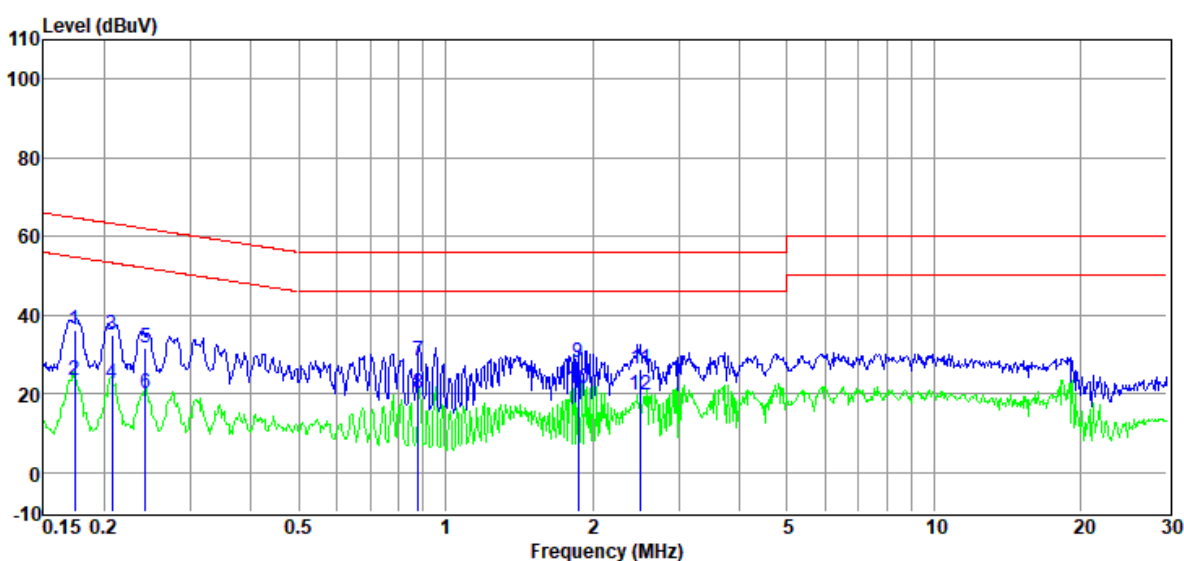

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	16.59	9.70	0.06	9.86	36.21	64.77	-28.56	QP	NEUTRAL
2	0.17	3.93	9.70	0.06	9.86	23.55	54.77	-31.22	Average	NEUTRAL
3	0.21	15.11	9.83	0.06	9.86	34.86	63.32	-28.46	QP	NEUTRAL
4	0.21	2.79	9.83	0.06	9.86	22.54	53.32	-30.78	Average	NEUTRAL
5	0.24	12.01	9.84	0.06	9.86	31.77	62.00	-30.23	QP	NEUTRAL
6	0.24	0.35	9.84	0.06	9.86	20.11	52.00	-31.89	Average	NEUTRAL
7	0.88	8.44	9.86	0.14	9.88	28.32	56.00	-27.68	QP	NEUTRAL
8	0.88	0.41	9.86	0.14	9.88	20.29	46.00	-25.71	Average	NEUTRAL
9	1.87	8.24	9.78	0.17	9.87	28.06	56.00	-27.94	QP	NEUTRAL
10	1.87	1.49	9.78	0.17	9.87	21.31	46.00	-24.69	Average	NEUTRAL
11	2.51	6.34	9.80	0.17	9.87	26.18	56.00	-29.82	QP	NEUTRAL
12	2.51	-0.25	9.80	0.17	9.87	19.59	46.00	-26.41	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 106

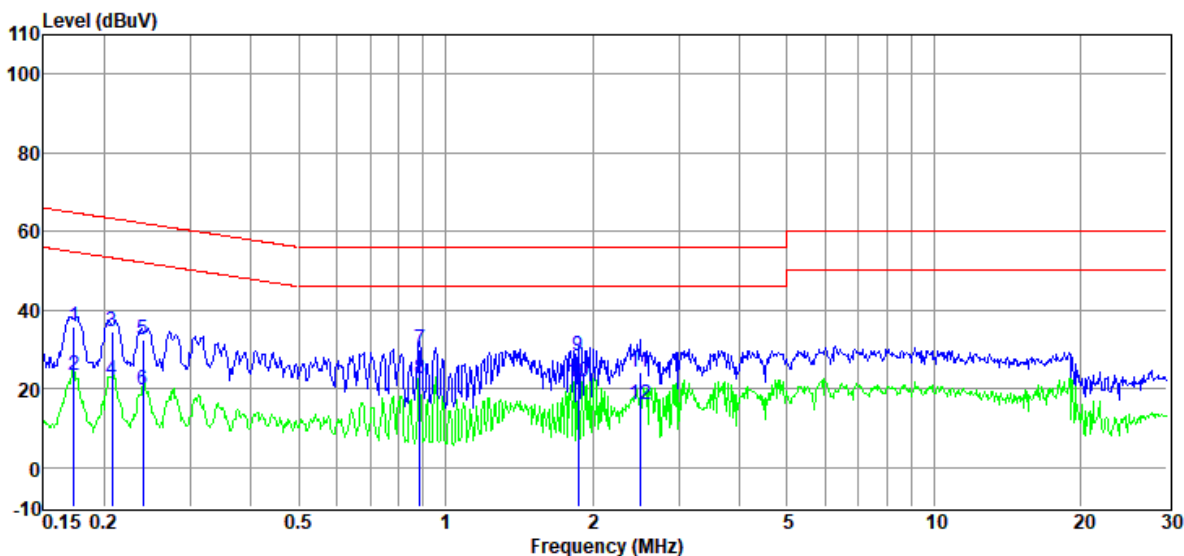

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	16.07	9.70	0.05	9.86	35.68	64.81	-29.13	QP	NEUTRAL
2	0.17	3.83	9.70	0.05	9.86	23.44	54.81	-31.37	Average	NEUTRAL
3	0.21	14.68	9.83	0.06	9.86	34.43	63.32	-28.89	QP	NEUTRAL
4	0.21	2.35	9.83	0.06	9.86	22.10	53.32	-31.22	Average	NEUTRAL
5	0.24	12.68	9.84	0.06	9.86	32.44	62.08	-29.64	QP	NEUTRAL
6	0.24	-0.11	9.84	0.06	9.86	19.65	52.08	-32.43	Average	NEUTRAL
7	0.88	10.18	9.86	0.14	9.88	30.06	56.00	-25.94	QP	NEUTRAL
8	0.88	2.51	9.86	0.14	9.88	22.39	46.00	-23.61	Average	NEUTRAL
9	1.87	8.36	9.78	0.17	9.87	28.18	56.00	-27.82	QP	NEUTRAL
10	1.87	2.11	9.78	0.17	9.87	21.93	46.00	-24.07	Average	NEUTRAL
11	2.50	4.40	9.80	0.17	9.87	24.24	56.00	-31.76	QP	NEUTRAL
12	2.50	-4.02	9.80	0.17	9.87	15.82	46.00	-30.18	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 108

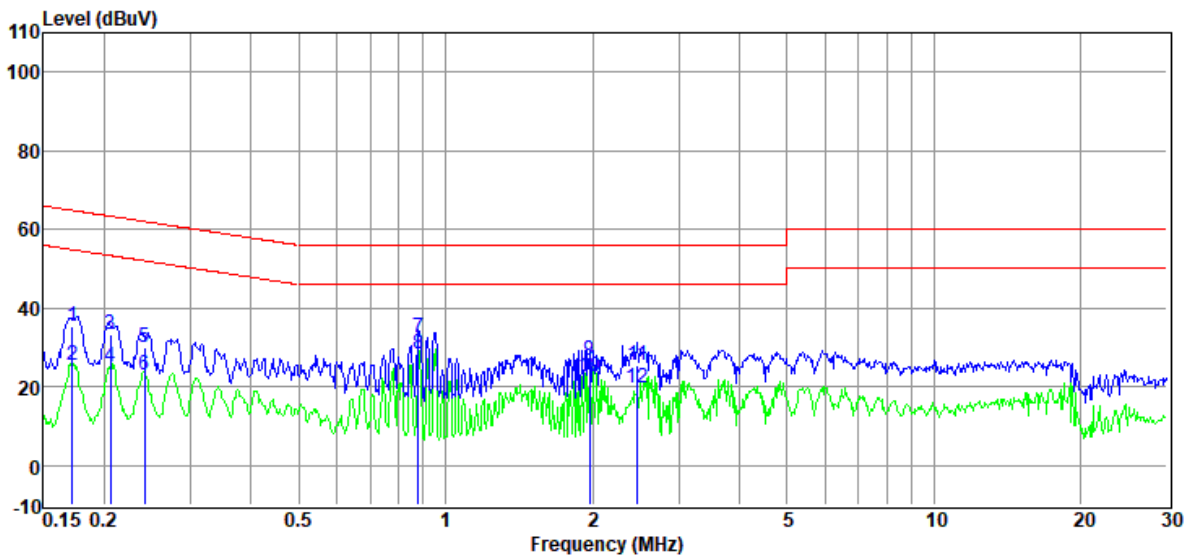

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	15.44	9.84	0.05	9.86	35.19	64.86	-29.67	QP	LINE
2	0.17	5.84	9.84	0.05	9.86	25.59	54.86	-29.27	Average	LINE
3	0.21	13.74	9.82	0.06	9.86	33.48	63.36	-29.88	QP	LINE
4	0.21	5.25	9.82	0.06	9.86	24.99	53.36	-28.37	Average	LINE
5	0.24	10.26	9.82	0.06	9.86	30.00	62.04	-32.04	QP	LINE
6	0.24	3.43	9.82	0.06	9.86	23.17	52.04	-28.87	Average	LINE
7	0.88	12.65	9.83	0.14	9.88	32.50	56.00	-23.50	QP	LINE
8	0.88	8.40	9.83	0.14	9.88	28.25	46.00	-17.75	Average	LINE
9	1.97	6.85	9.79	0.17	9.87	26.68	56.00	-29.32	QP	LINE
10	1.97	2.76	9.79	0.17	9.87	22.59	46.00	-23.41	Average	LINE
11	2.47	5.75	9.85	0.17	9.87	25.64	56.00	-30.36	QP	LINE
12	2.47	-0.12	9.85	0.17	9.87	19.77	46.00	-26.23	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6**
Test Date : 2025-08-21 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The first: FG4CELL21201

Data: 110

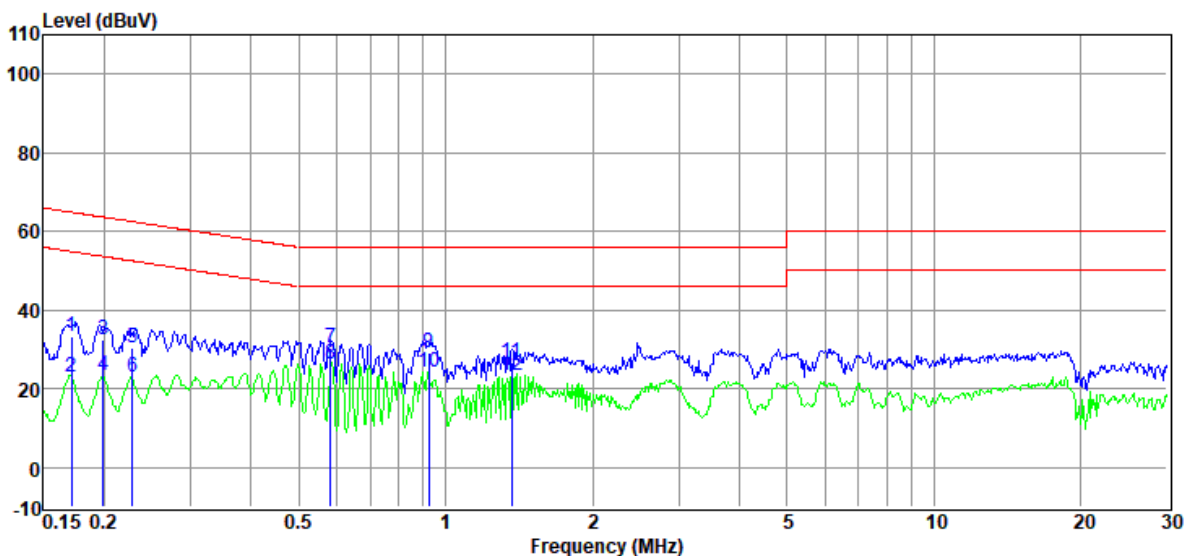

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	13.60	9.84	0.05	9.86	33.35	64.90	-31.55	QP	LINE
2	0.17	3.25	9.84	0.05	9.86	23.00	54.90	-31.90	Average	LINE
3	0.20	12.63	9.82	0.06	9.86	32.37	63.67	-31.30	QP	LINE
4	0.20	3.52	9.82	0.06	9.86	23.26	53.67	-30.41	Average	LINE
5	0.23	10.80	9.82	0.06	9.86	30.54	62.52	-31.98	QP	LINE
6	0.23	3.06	9.82	0.06	9.86	22.80	52.52	-29.72	Average	LINE
7	0.58	10.42	9.91	0.10	9.86	30.29	56.00	-25.71	QP	LINE
8	0.58	6.37	9.91	0.10	9.86	26.24	46.00	-19.76	Average	LINE
9	0.92	9.12	9.88	0.14	9.88	29.02	56.00	-26.98	QP	LINE
10	0.92	4.21	9.88	0.14	9.88	24.11	46.00	-21.89	Average	LINE
11	1.37	6.81	9.89	0.16	9.88	26.74	56.00	-29.26	QP	LINE
12	1.37	3.41	9.89	0.16	9.88	23.34	46.00	-22.66	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-08-21
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The first: FG4CELL21201

D:\2025 CE report data\Q25042508-2E 0821\0821 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 112

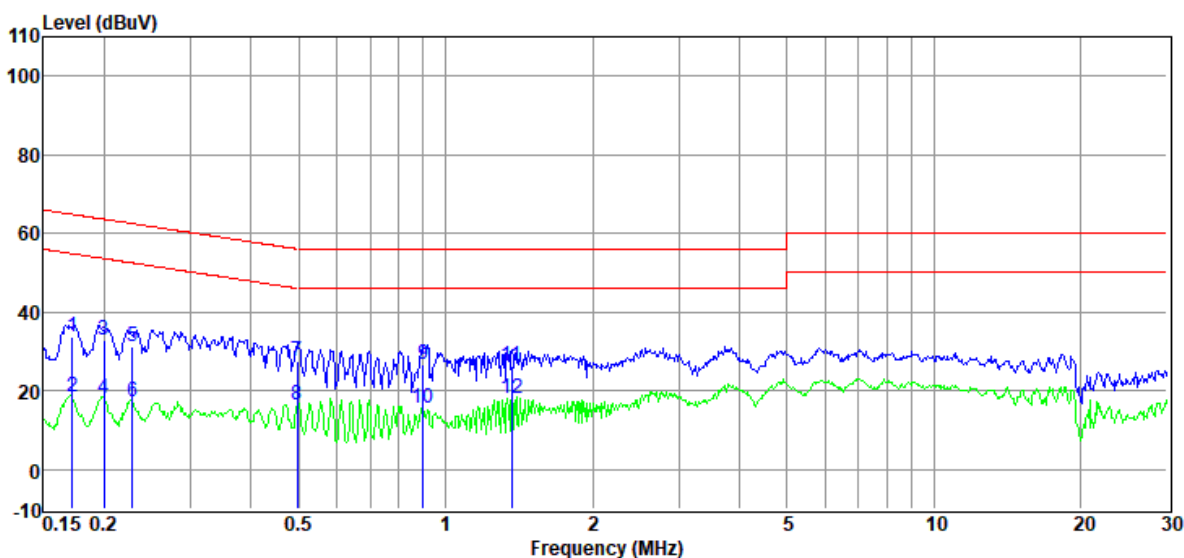

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	14.03	9.69	0.05	9.86	33.63	64.86	-31.23	QP	NEUTRAL
2	0.17	-1.31	9.69	0.05	9.86	18.29	54.86	-36.57	Average	NEUTRAL
3	0.20	13.18	9.83	0.06	9.86	32.93	63.62	-30.69	QP	NEUTRAL
4	0.20	-1.60	9.83	0.06	9.86	18.15	53.62	-35.47	Average	NEUTRAL
5	0.23	11.64	9.84	0.06	9.86	31.40	62.52	-31.12	QP	NEUTRAL
6	0.23	-2.51	9.84	0.06	9.86	17.25	52.52	-35.27	Average	NEUTRAL
7	0.50	7.75	9.91	0.09	9.86	27.61	56.05	-28.44	QP	NEUTRAL
8	0.50	-3.52	9.91	0.09	9.86	16.34	46.05	-29.71	Average	NEUTRAL
9	0.90	6.82	9.87	0.14	9.88	26.71	56.00	-29.29	QP	NEUTRAL
10	0.90	-4.44	9.87	0.14	9.88	15.45	46.00	-30.55	Average	NEUTRAL
11	1.37	6.23	9.86	0.16	9.88	26.13	56.00	-29.87	QP	NEUTRAL
12	1.37	-1.95	9.86	0.16	9.88	17.95	46.00	-28.05	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The second: FG4CELL21700GP

Data: 2

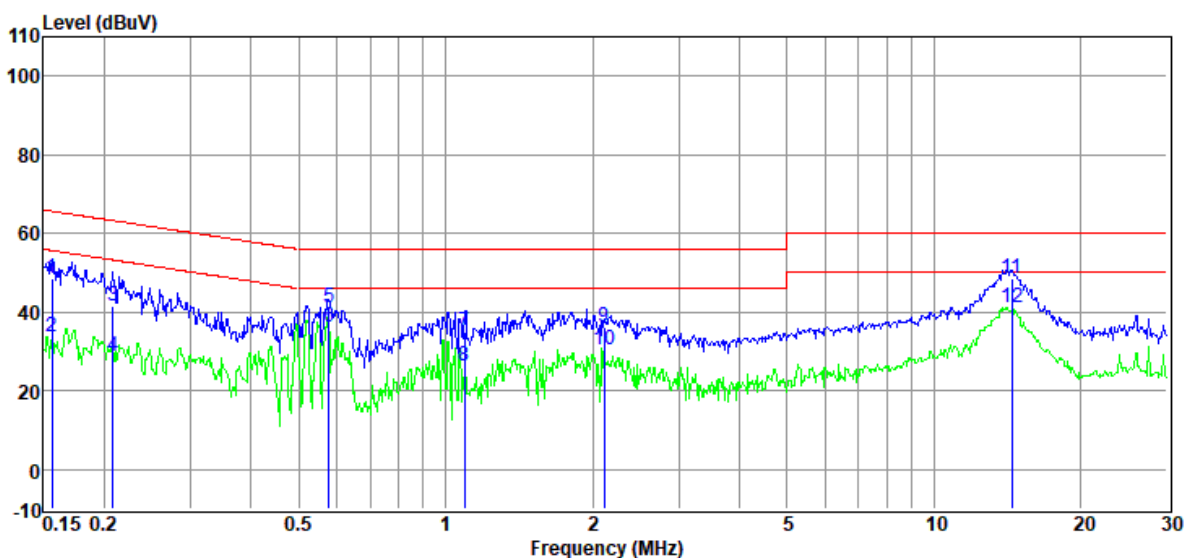

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	28.95	9.74	0.05	9.86	48.60	65.65	-17.05	QP	NEUTRAL
2	0.16	14.07	9.74	0.05	9.86	33.72	55.65	-21.93	Average	NEUTRAL
3	0.21	21.75	9.83	0.06	9.86	41.50	63.27	-21.77	QP	NEUTRAL
4	0.21	9.01	9.83	0.06	9.86	28.76	53.27	-24.51	Average	NEUTRAL
5	0.58	21.47	9.89	0.10	9.86	41.32	56.00	-14.68	QP	NEUTRAL
6	0.58	16.40	9.89	0.10	9.86	36.25	46.00	-9.75	Average	NEUTRAL
7	1.09	14.89	9.92	0.15	9.88	34.84	56.00	-21.16	QP	NEUTRAL
8	1.09	6.53	9.92	0.15	9.88	26.48	46.00	-19.52	Average	NEUTRAL
9	2.11	16.26	9.77	0.17	9.87	36.07	56.00	-19.93	QP	NEUTRAL
10	2.11	10.51	9.77	0.17	9.87	30.32	46.00	-15.68	Average	NEUTRAL
11	14.44	27.79	10.34	0.34	9.93	48.40	60.00	-11.60	QP	NEUTRAL
12	14.44	20.48	10.34	0.34	9.93	41.09	50.00	-8.91	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 4

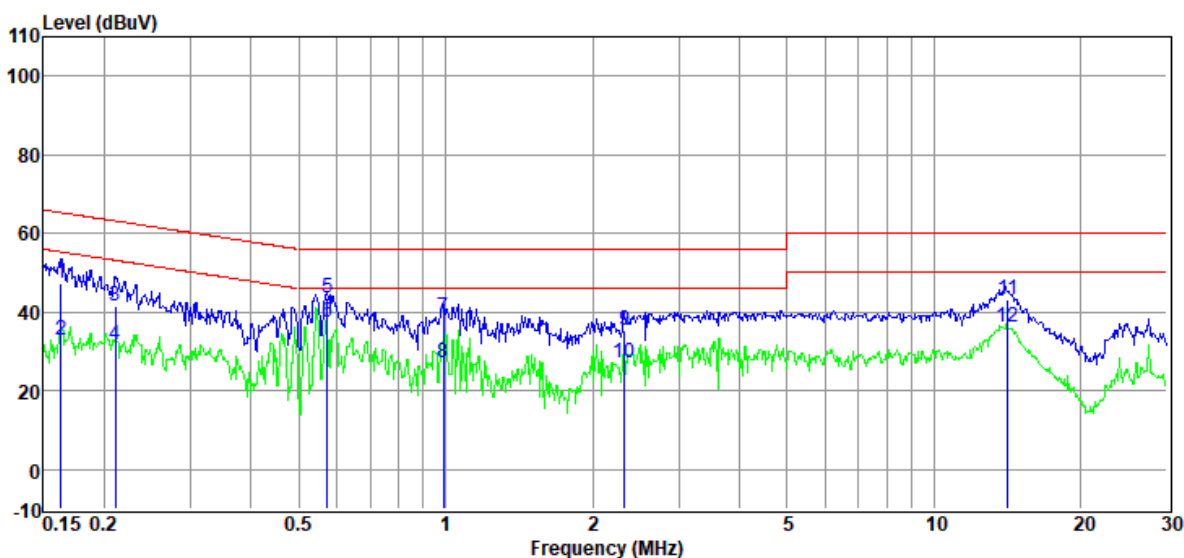

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	27.46	9.84	0.05	9.86	47.21	65.30	-18.09	QP	LINE
2	0.16	13.22	9.84	0.05	9.86	32.97	55.30	-22.33	Average	LINE
3	0.21	21.96	9.82	0.06	9.86	41.70	63.18	-21.48	QP	LINE
4	0.21	11.86	9.82	0.06	9.86	31.60	53.18	-21.58	Average	LINE
5	0.57	23.67	9.90	0.10	9.86	43.53	56.00	-12.47	QP	LINE
6	0.57	17.64	9.90	0.10	9.86	37.50	46.00	-8.50	Average	LINE
7	0.99	18.55	9.96	0.15	9.88	38.54	56.00	-17.46	QP	LINE
8	0.99	7.07	9.96	0.15	9.88	27.06	46.00	-18.94	Average	LINE
9	2.32	15.45	9.84	0.17	9.87	35.33	56.00	-20.67	QP	LINE
10	2.32	7.33	9.84	0.17	9.87	27.21	46.00	-18.79	Average	LINE
11	14.14	22.66	10.29	0.33	9.94	43.22	60.00	-16.78	QP	LINE
12	14.14	15.66	10.29	0.33	9.94	36.22	50.00	-13.78	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 6

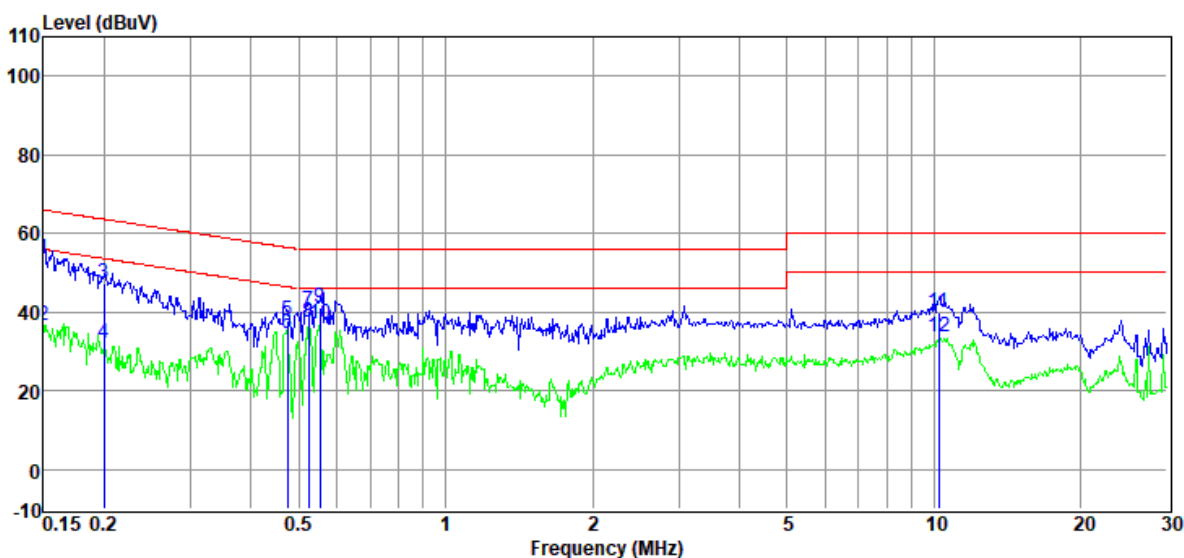

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	33.93	9.77	0.05	9.86	53.61	66.00	-12.39	QP	NEUTRAL
2	0.15	16.74	9.77	0.05	9.86	36.42	56.00	-19.58	Average	NEUTRAL
3	0.20	27.43	9.83	0.06	9.86	47.18	63.62	-16.44	QP	NEUTRAL
4	0.20	12.42	9.83	0.06	9.86	32.17	53.62	-21.45	Average	NEUTRAL
5	0.47	18.11	9.88	0.09	9.86	37.94	56.45	-18.51	QP	NEUTRAL
6	0.47	14.71	9.88	0.09	9.86	34.54	46.45	-11.91	Average	NEUTRAL
7	0.52	20.39	9.90	0.09	9.86	40.24	56.00	-15.76	QP	NEUTRAL
8	0.52	17.60	9.90	0.09	9.86	37.45	46.00	-8.55	Average	NEUTRAL
9	0.55	21.49	9.89	0.10	9.86	41.34	56.00	-14.66	QP	NEUTRAL
10	0.55	17.32	9.89	0.10	9.86	37.17	46.00	-8.83	Average	NEUTRAL
11	10.23	19.51	10.18	0.26	9.98	39.93	60.00	-20.07	QP	NEUTRAL
12	10.23	13.15	10.18	0.26	9.98	33.57	50.00	-16.43	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The second: FG4CELL21700GP

Data: 8

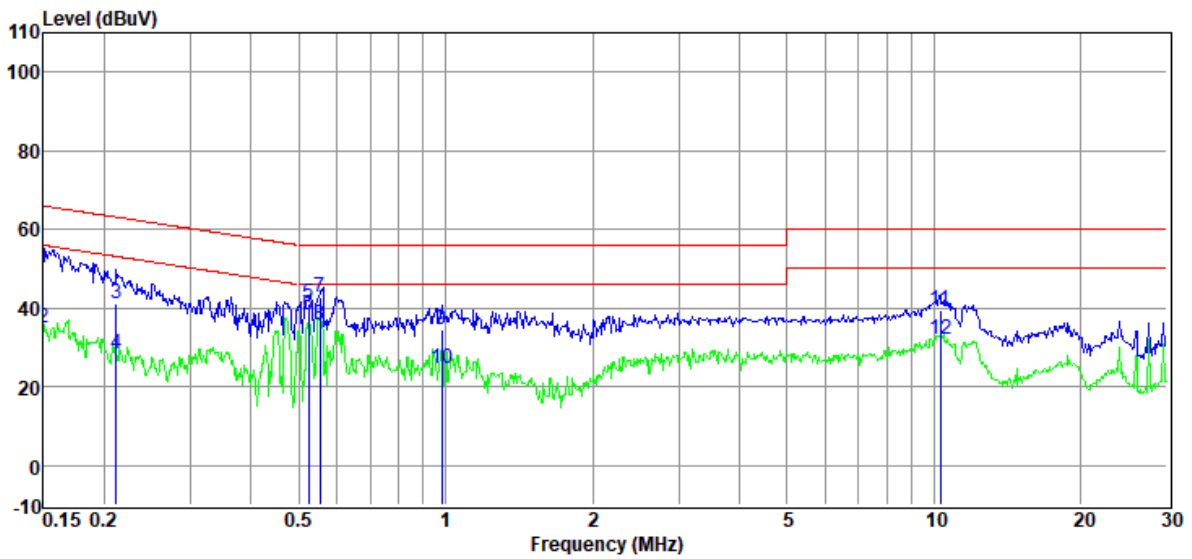

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.15	30.44	9.85	0.05	9.86	50.20	66.00	-15.80	QP	LINE
2	0.15	15.33	9.85	0.05	9.86	35.09	56.00	-20.91	Average	LINE
3	0.21	21.22	9.82	0.06	9.86	40.96	63.14	-22.18	QP	LINE
4	0.21	8.79	9.82	0.06	9.86	28.53	53.14	-24.61	Average	LINE
5	0.52	21.34	9.81	0.09	9.86	41.10	56.00	-14.90	QP	LINE
6	0.52	18.34	9.81	0.09	9.86	38.10	46.00	-7.90	Average	LINE
7	0.55	23.02	9.86	0.10	9.86	42.84	56.00	-13.16	QP	LINE
8	0.55	16.02	9.86	0.10	9.86	35.84	46.00	-10.16	Average	LINE
9	0.98	14.41	9.95	0.15	9.88	34.39	56.00	-21.61	QP	LINE
10	0.98	4.58	9.95	0.15	9.88	24.56	46.00	-21.44	Average	LINE
11	10.29	18.83	10.21	0.27	9.98	39.29	60.00	-20.71	QP	LINE
12	10.29	11.67	10.21	0.27	9.98	32.13	50.00	-17.87	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The second: FG4CELL21700GP

Data: 10

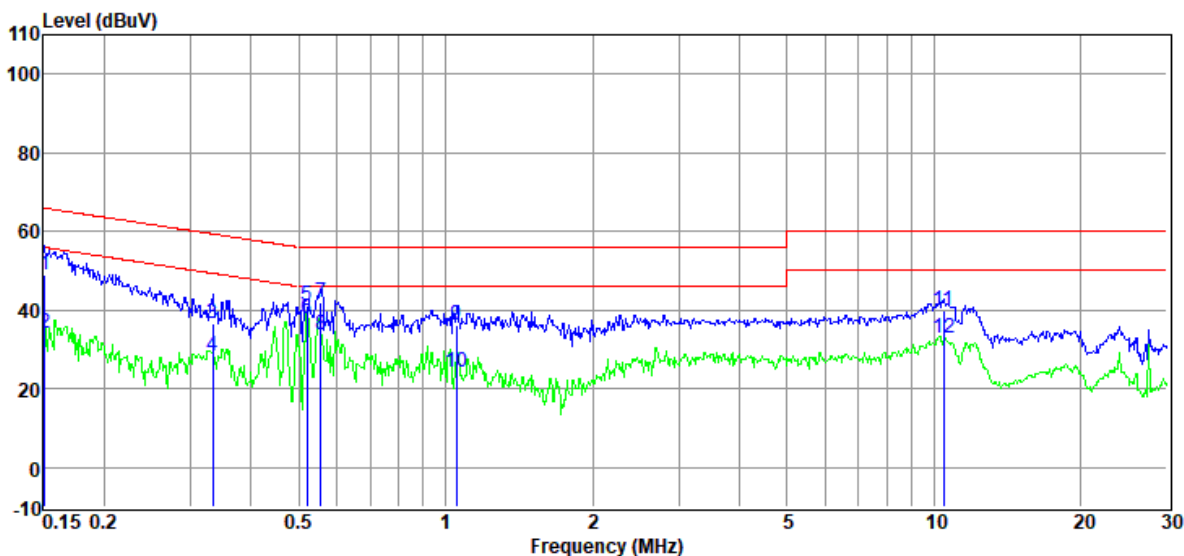

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	29.36	9.85	0.05	9.86	49.12	65.96	-16.84	QP	LINE
2	0.15	14.18	9.85	0.05	9.86	33.94	55.96	-22.02	Average	LINE
3	0.33	17.06	9.67	0.07	9.86	36.66	59.35	-22.69	QP	LINE
4	0.33	8.59	9.67	0.07	9.86	28.19	49.35	-21.16	Average	LINE
5	0.52	21.43	9.81	0.09	9.86	41.19	56.00	-14.81	QP	LINE
6	0.52	18.09	9.81	0.09	9.86	37.85	46.00	-8.15	Average	LINE
7	0.56	22.24	9.87	0.10	9.86	42.07	56.00	-13.93	QP	LINE
8	0.56	13.84	9.87	0.10	9.86	33.67	46.00	-12.33	Average	LINE
9	1.05	16.07	9.96	0.15	9.88	36.06	56.00	-19.94	QP	LINE
10	1.05	4.27	9.96	0.15	9.88	24.26	46.00	-21.74	Average	LINE
11	10.45	19.38	10.21	0.27	9.97	39.83	60.00	-20.17	QP	LINE
12	10.45	12.51	10.21	0.27	9.97	32.96	50.00	-17.04	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 12

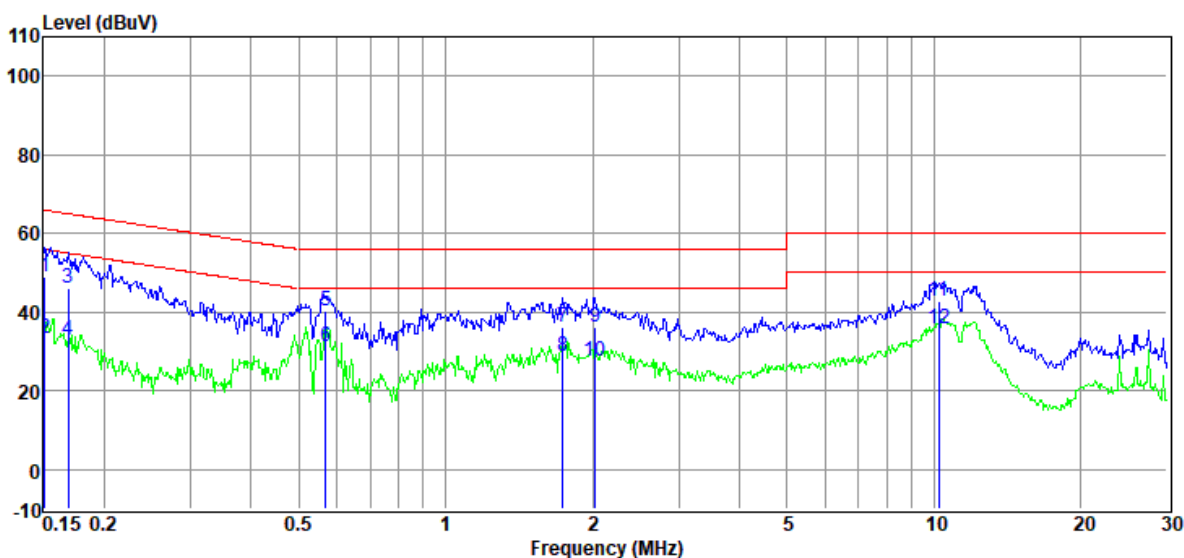

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	29.10	9.77	0.05	9.86	48.78	65.96	-17.18	QP	NEUTRAL
2	0.15	13.69	9.77	0.05	9.86	33.37	55.96	-22.59	Average	NEUTRAL
3	0.17	26.65	9.69	0.05	9.86	46.25	65.03	-18.78	QP	NEUTRAL
4	0.17	13.46	9.69	0.05	9.86	33.06	55.03	-21.97	Average	NEUTRAL
5	0.57	20.28	9.89	0.10	9.86	40.13	56.00	-15.87	QP	NEUTRAL
6	0.57	11.45	9.89	0.10	9.86	31.30	46.00	-14.70	Average	NEUTRAL
7	1.73	16.37	9.80	0.16	9.87	36.20	56.00	-19.80	QP	NEUTRAL
8	1.73	8.85	9.80	0.16	9.87	28.68	46.00	-17.32	Average	NEUTRAL
9	2.02	16.37	9.76	0.17	9.87	36.17	56.00	-19.83	QP	NEUTRAL
10	2.02	7.74	9.76	0.17	9.87	27.54	46.00	-18.46	Average	NEUTRAL
11	10.23	22.38	10.18	0.26	9.98	42.80	60.00	-17.20	QP	NEUTRAL
12	10.23	15.52	10.18	0.26	9.98	35.94	50.00	-14.06	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The second: FG4CELL21700GP

Data: 14

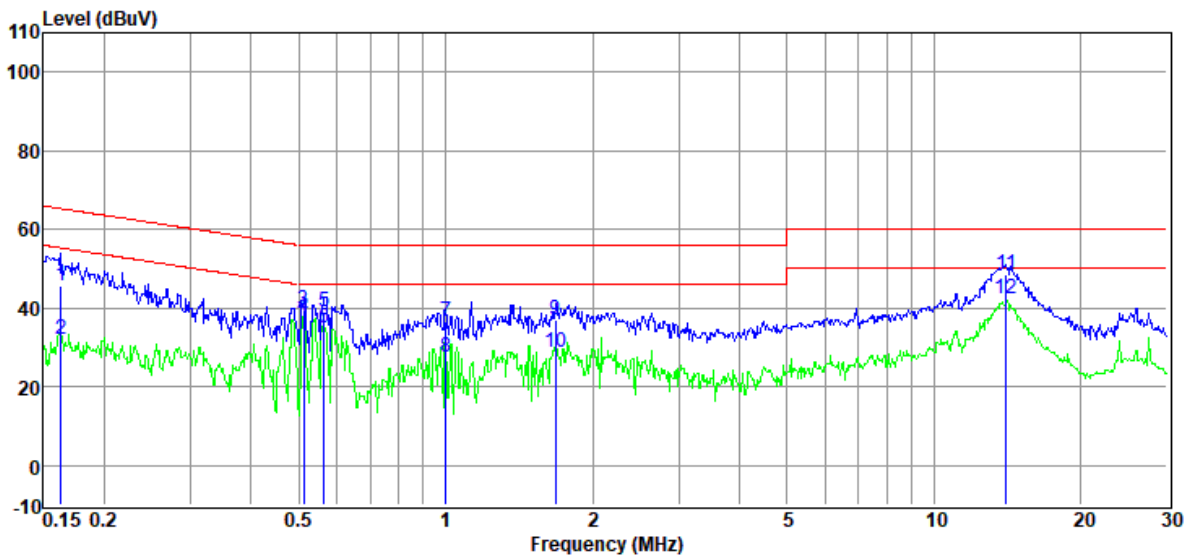

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	25.86	9.71	0.05	9.86	45.48	65.30	-19.82	QP	NEUTRAL
2	0.16	12.48	9.71	0.05	9.86	32.10	55.30	-23.20	Average	NEUTRAL
3	0.51	19.82	9.91	0.09	9.86	39.68	56.00	-16.32	QP	NEUTRAL
4	0.51	18.05	9.91	0.09	9.86	37.91	46.00	-8.09	Average	NEUTRAL
5	0.56	19.30	9.89	0.10	9.86	39.15	56.00	-16.85	QP	NEUTRAL
6	0.56	14.93	9.89	0.10	9.86	34.78	46.00	-11.22	Average	NEUTRAL
7	1.00	16.60	9.94	0.15	9.88	36.57	56.00	-19.43	QP	NEUTRAL
8	1.00	7.60	9.94	0.15	9.88	27.57	46.00	-18.43	Average	NEUTRAL
9	1.68	17.01	9.81	0.16	9.87	36.85	56.00	-19.15	QP	NEUTRAL
10	1.68	8.74	9.81	0.16	9.87	28.58	46.00	-17.42	Average	NEUTRAL
11	14.06	27.90	10.33	0.33	9.94	48.50	60.00	-11.50	QP	NEUTRAL
12	14.06	21.65	10.33	0.33	9.94	42.25	50.00	-7.75	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The second: FG4CELL21700GP

Data: 16

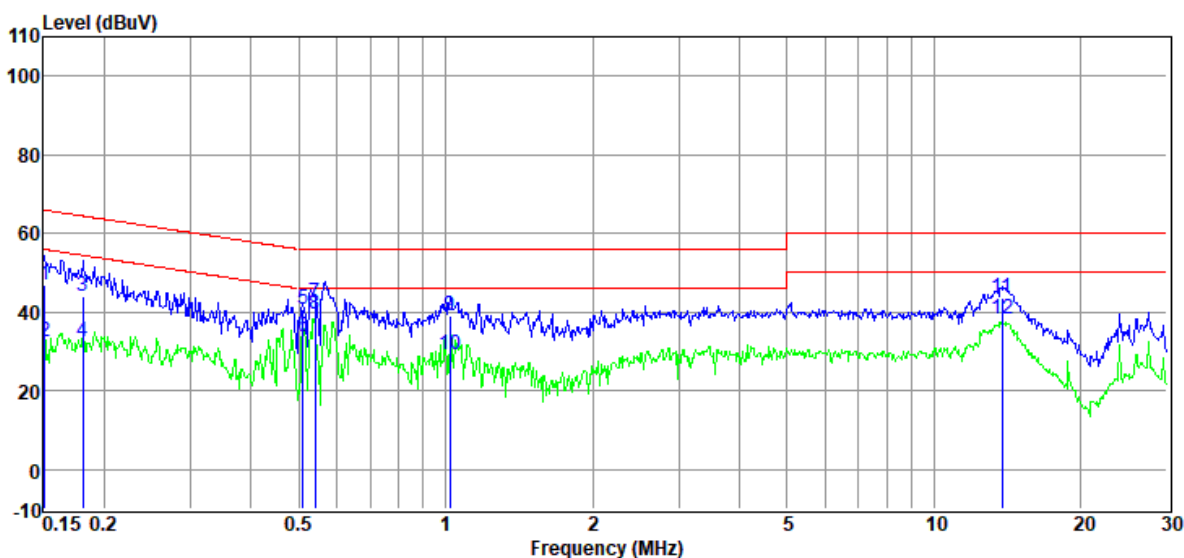

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	27.31	9.85	0.05	9.86	47.07	65.96	-18.89	QP	LINE
2	0.15	12.69	9.85	0.05	9.86	32.45	55.96	-23.51	Average	LINE
3	0.18	24.13	9.83	0.06	9.86	43.88	64.46	-20.58	QP	LINE
4	0.18	12.93	9.83	0.06	9.86	32.68	54.46	-21.78	Average	LINE
5	0.51	21.11	9.79	0.09	9.86	40.85	56.00	-15.15	QP	LINE
6	0.51	13.89	9.79	0.09	9.86	33.63	46.00	-12.37	Average	LINE
7	0.54	22.72	9.84	0.10	9.86	42.52	56.00	-13.48	QP	LINE
8	0.54	19.57	9.84	0.10	9.86	39.37	46.00	-6.63	Average	LINE
9	1.02	19.16	9.96	0.15	9.88	39.15	56.00	-16.85	QP	LINE
10	1.02	9.10	9.96	0.15	9.88	29.09	46.00	-16.91	Average	LINE
11	13.77	23.12	10.29	0.33	9.94	43.68	60.00	-16.32	QP	LINE
12	13.77	17.64	10.29	0.33	9.94	38.20	50.00	-11.80	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 18

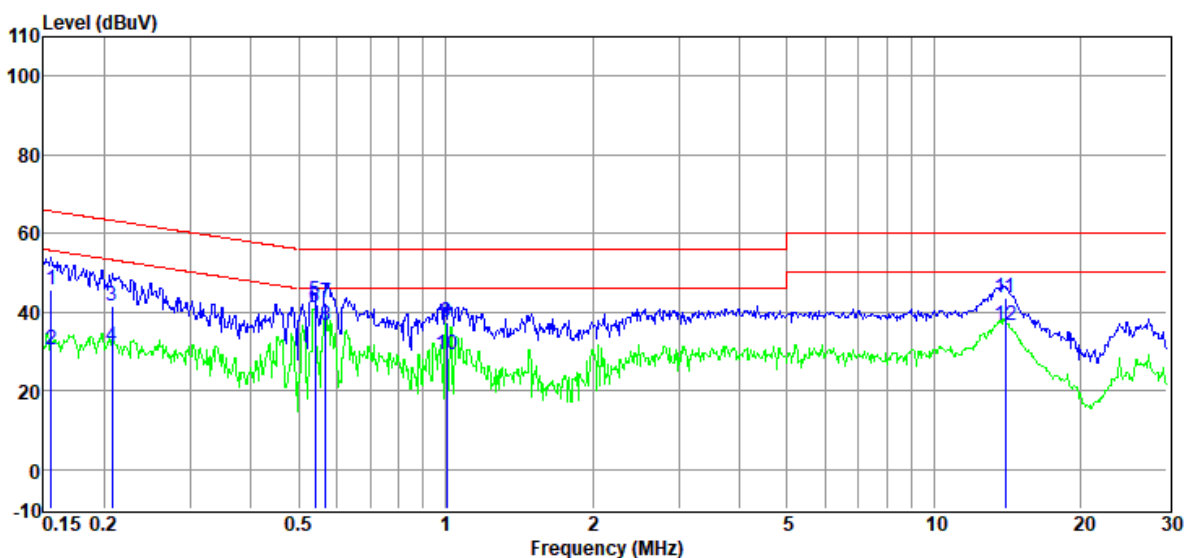

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	26.11	9.85	0.05	9.86	45.87	65.69	-19.82	QP	LINE
2	0.16	10.68	9.85	0.05	9.86	30.44	55.69	-25.25	Average	LINE
3	0.21	21.68	9.82	0.06	9.86	41.42	63.32	-21.90	QP	LINE
4	0.21	11.70	9.82	0.06	9.86	31.44	53.32	-21.88	Average	LINE
5	0.54	22.87	9.84	0.10	9.86	42.67	56.00	-13.33	QP	LINE
6	0.54	21.16	9.84	0.10	9.86	40.96	46.00	-5.04	Average	LINE
7	0.57	22.55	9.89	0.10	9.86	42.40	56.00	-13.60	QP	LINE
8	0.57	16.86	9.89	0.10	9.86	36.71	46.00	-9.29	Average	LINE
9	1.01	17.37	9.97	0.15	9.88	37.37	56.00	-18.63	QP	LINE
10	1.01	9.19	9.97	0.15	9.88	29.19	46.00	-16.81	Average	LINE
11	13.99	23.19	10.29	0.33	9.94	43.75	60.00	-16.25	QP	LINE
12	13.99	16.22	10.29	0.33	9.94	36.78	50.00	-13.22	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 20

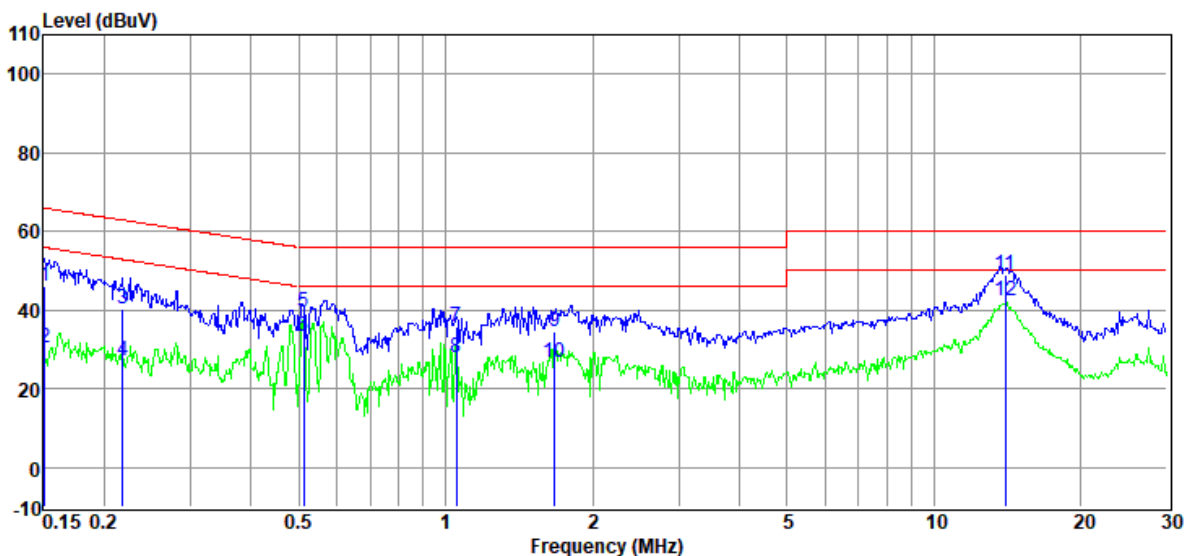

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	26.46	9.77	0.05	9.86	46.14	65.96	-19.82	QP	NEUTRAL
2	0.15	10.76	9.77	0.05	9.86	30.44	55.96	-25.52	Average	NEUTRAL
3	0.22	20.43	9.83	0.06	9.86	40.18	62.88	-22.70	QP	NEUTRAL
4	0.22	7.54	9.83	0.06	9.86	27.29	52.88	-25.59	Average	NEUTRAL
5	0.51	19.76	9.91	0.09	9.86	39.62	56.00	-16.38	QP	NEUTRAL
6	0.51	13.31	9.91	0.09	9.86	33.17	46.00	-12.83	Average	NEUTRAL
7	1.05	15.96	9.93	0.15	9.88	35.92	56.00	-20.08	QP	NEUTRAL
8	1.05	7.79	9.93	0.15	9.88	27.75	46.00	-18.25	Average	NEUTRAL
9	1.67	14.85	9.81	0.16	9.87	34.69	56.00	-21.31	QP	NEUTRAL
10	1.67	6.84	9.81	0.16	9.87	26.68	46.00	-19.32	Average	NEUTRAL
11	13.99	28.54	10.33	0.33	9.94	49.14	60.00	-10.86	QP	NEUTRAL
12	13.99	21.88	10.33	0.33	9.94	42.48	50.00	-7.52	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 22

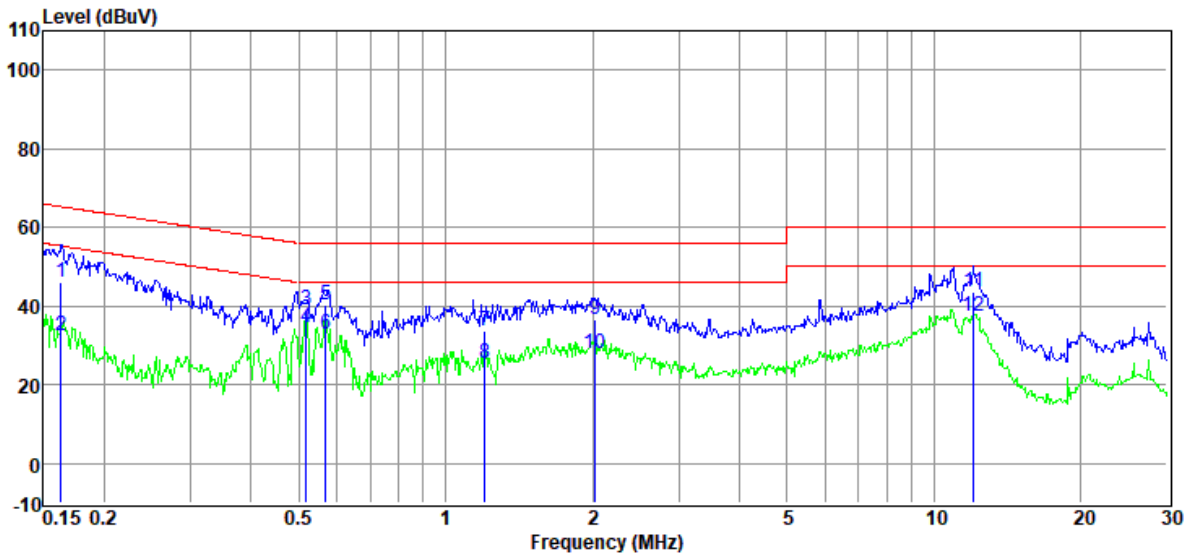

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	26.56	9.71	0.05	9.86	46.18	65.30	-19.12	QP	NEUTRAL
2	0.16	12.98	9.71	0.05	9.86	32.60	55.30	-22.70	Average	NEUTRAL
3	0.52	19.30	9.90	0.09	9.86	39.15	56.00	-16.85	QP	NEUTRAL
4	0.52	14.63	9.90	0.09	9.86	34.48	46.00	-11.52	Average	NEUTRAL
5	0.57	20.37	9.89	0.10	9.86	40.22	56.00	-15.78	QP	NEUTRAL
6	0.57	13.04	9.89	0.10	9.86	32.89	46.00	-13.11	Average	NEUTRAL
7	1.20	13.97	9.89	0.15	9.88	33.89	56.00	-22.11	QP	NEUTRAL
8	1.20	5.58	9.89	0.15	9.88	25.50	46.00	-20.50	Average	NEUTRAL
9	2.02	16.98	9.76	0.17	9.87	36.78	56.00	-19.22	QP	NEUTRAL
10	2.02	8.34	9.76	0.17	9.87	28.14	46.00	-17.86	Average	NEUTRAL
11	12.06	23.04	10.26	0.30	9.96	43.56	60.00	-16.44	QP	NEUTRAL
12	12.06	16.70	10.26	0.30	9.96	37.22	50.00	-12.78	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 24

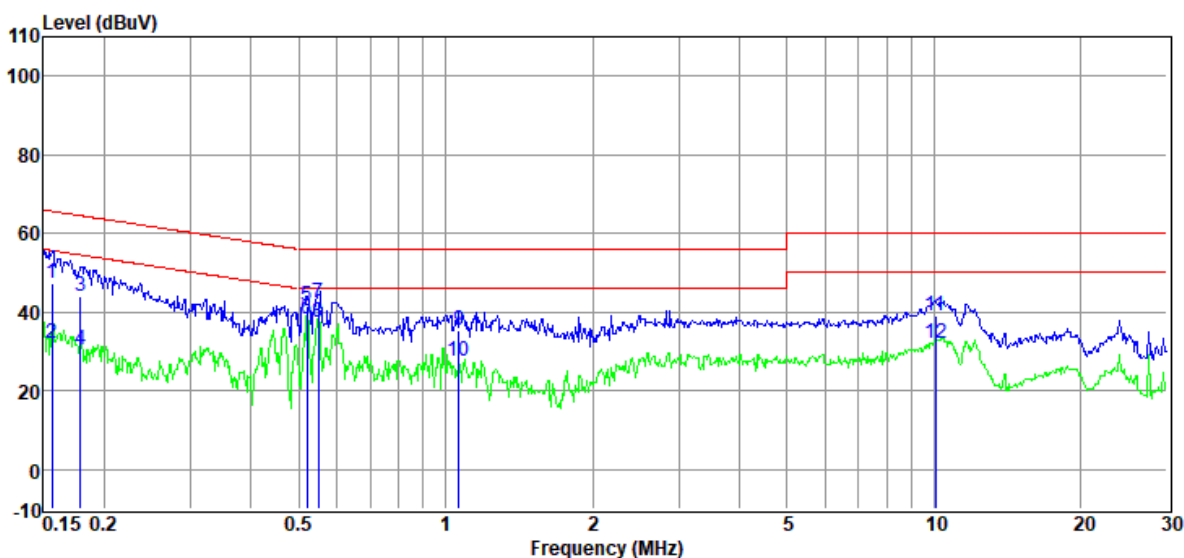

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	27.53	9.85	0.05	9.86	47.29	65.65	-18.36	QP	LINE
2	0.16	12.48	9.85	0.05	9.86	32.24	55.65	-23.41	Average	LINE
3	0.18	24.42	9.83	0.06	9.86	44.17	64.55	-20.38	QP	LINE
4	0.18	10.69	9.83	0.06	9.86	30.44	54.55	-24.11	Average	LINE
5	0.52	21.62	9.81	0.09	9.86	41.38	56.00	-14.62	QP	LINE
6	0.52	18.34	9.81	0.09	9.86	38.10	46.00	-7.90	Average	LINE
7	0.55	22.69	9.86	0.10	9.86	42.51	56.00	-13.49	QP	LINE
8	0.55	17.42	9.86	0.10	9.86	37.24	46.00	-8.76	Average	LINE
9	1.07	15.23	9.95	0.15	9.88	35.21	56.00	-20.79	QP	LINE
10	1.07	7.48	9.95	0.15	9.88	27.46	46.00	-18.54	Average	LINE
11	10.07	18.47	10.20	0.26	9.98	38.91	60.00	-21.09	QP	LINE
12	10.07	11.60	10.20	0.26	9.98	32.04	50.00	-17.96	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 26

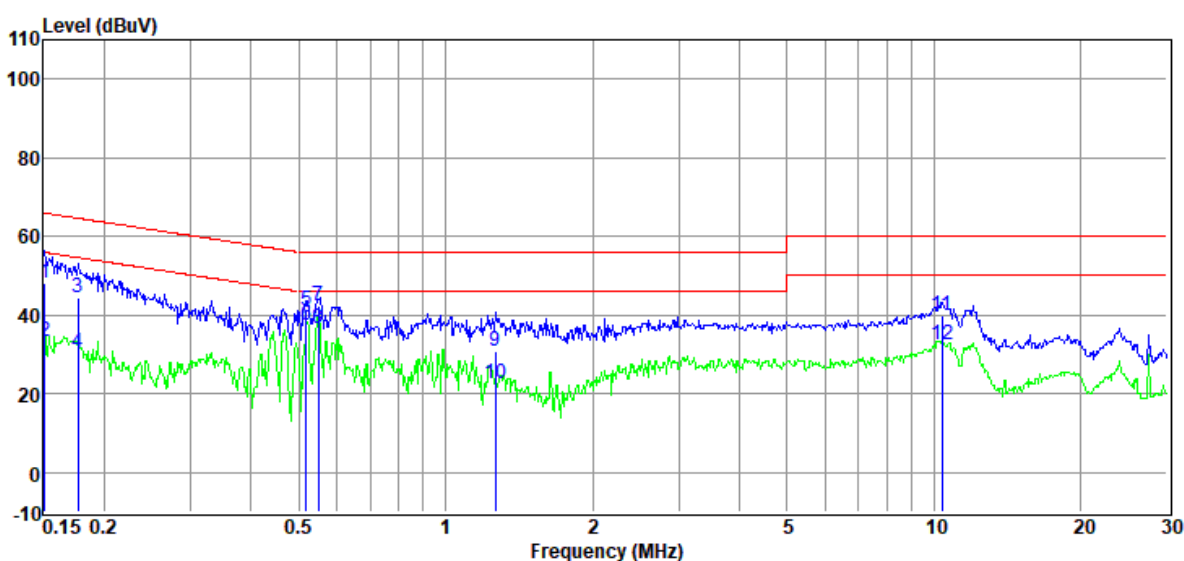

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	28.28	9.85	0.05	9.86	48.04	65.96	-17.92	QP	LINE
2	0.15	13.69	9.85	0.05	9.86	33.45	55.96	-22.51	Average	LINE
3	0.18	24.87	9.84	0.06	9.86	44.63	64.64	-20.01	QP	LINE
4	0.18	10.77	9.84	0.06	9.86	30.53	54.64	-24.11	Average	LINE
5	0.52	21.45	9.80	0.09	9.86	41.20	56.00	-14.80	QP	LINE
6	0.52	17.47	9.80	0.09	9.86	37.22	46.00	-8.78	Average	LINE
7	0.55	22.43	9.86	0.10	9.86	42.25	56.00	-13.75	QP	LINE
8	0.55	16.85	9.86	0.10	9.86	36.67	46.00	-9.33	Average	LINE
9	1.26	11.08	9.91	0.16	9.88	31.03	56.00	-24.97	QP	LINE
10	1.26	2.53	9.91	0.16	9.88	22.48	46.00	-23.52	Average	LINE
11	10.40	19.29	10.21	0.27	9.98	39.75	60.00	-20.25	QP	LINE
12	10.40	12.07	10.21	0.27	9.98	32.53	50.00	-17.47	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 28

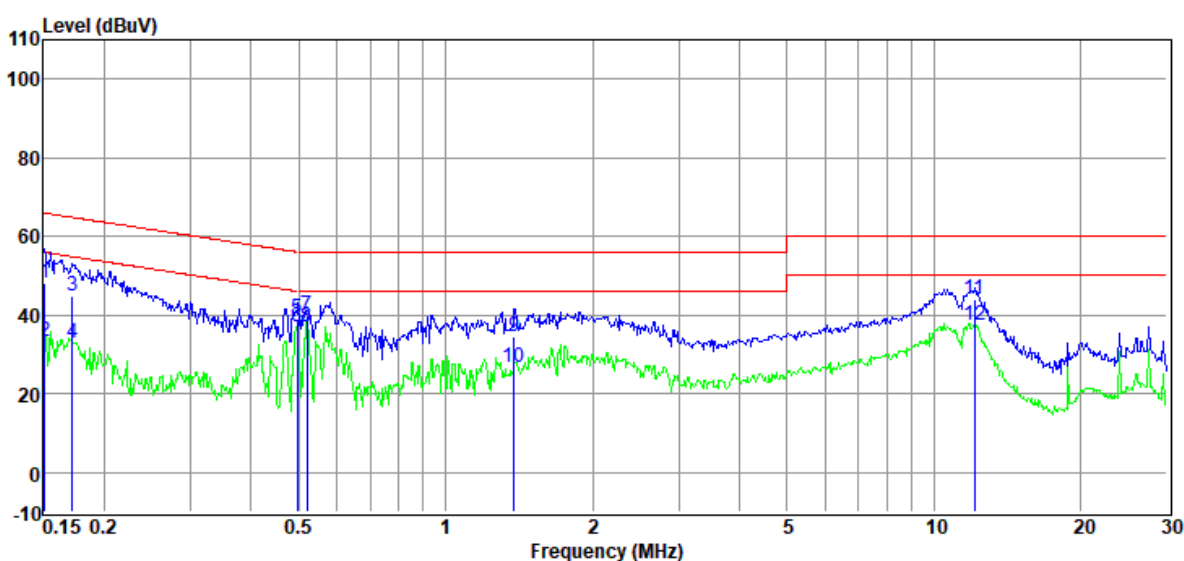

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	28.35	9.77	0.05	9.86	48.03	65.96	-17.93	QP	NEUTRAL
2	0.15	13.55	9.77	0.05	9.86	33.23	55.96	-22.73	Average	NEUTRAL
3	0.17	25.32	9.69	0.05	9.86	44.92	64.86	-19.94	QP	NEUTRAL
4	0.17	13.19	9.69	0.05	9.86	32.79	54.86	-22.07	Average	NEUTRAL
5	0.50	19.08	9.91	0.09	9.86	38.94	56.05	-17.11	QP	NEUTRAL
6	0.50	16.99	9.91	0.09	9.86	36.85	46.05	-9.20	Average	NEUTRAL
7	0.52	20.02	9.90	0.09	9.86	39.87	56.00	-16.13	QP	NEUTRAL
8	0.52	16.99	9.90	0.09	9.86	36.84	46.00	-9.16	Average	NEUTRAL
9	1.38	14.52	9.86	0.16	9.88	34.42	56.00	-21.58	QP	NEUTRAL
10	1.38	7.01	9.86	0.16	9.88	26.91	46.00	-19.09	Average	NEUTRAL
11	12.12	23.53	10.26	0.30	9.96	44.05	60.00	-15.95	QP	NEUTRAL
12	12.12	16.85	10.26	0.30	9.96	37.37	50.00	-12.63	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The second: FG4CELL21700GP

Data: 30

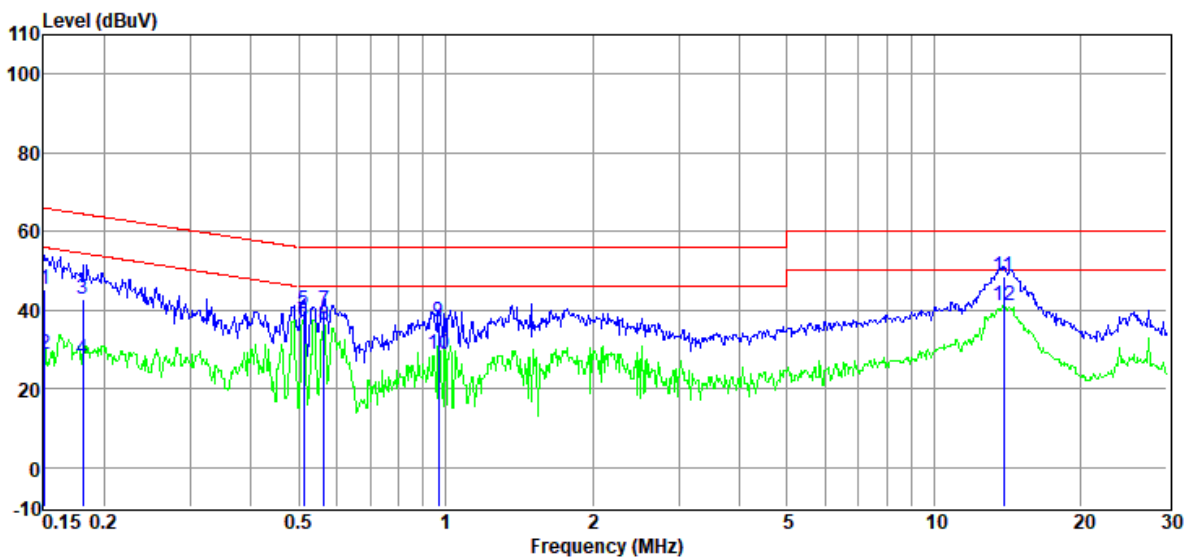

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	25.56	9.77	0.05	9.86	45.24	65.96	-20.72	QP	NEUTRAL
2	0.15	9.05	9.77	0.05	9.86	28.73	55.96	-27.23	Average	NEUTRAL
3	0.18	23.26	9.74	0.06	9.86	42.92	64.46	-21.54	QP	NEUTRAL
4	0.18	7.90	9.74	0.06	9.86	27.56	54.46	-26.90	Average	NEUTRAL
5	0.51	20.23	9.91	0.09	9.86	40.09	56.00	-15.91	QP	NEUTRAL
6	0.51	17.14	9.91	0.09	9.86	37.00	46.00	-9.00	Average	NEUTRAL
7	0.56	20.00	9.89	0.10	9.86	39.85	56.00	-16.15	QP	NEUTRAL
8	0.56	16.16	9.89	0.10	9.86	36.01	46.00	-9.99	Average	NEUTRAL
9	0.97	16.95	9.92	0.15	9.88	36.90	56.00	-19.10	QP	NEUTRAL
10	0.97	8.90	9.92	0.15	9.88	28.85	46.00	-17.15	Average	NEUTRAL
11	13.92	27.82	10.33	0.33	9.94	48.42	60.00	-11.58	QP	NEUTRAL
12	13.92	20.53	10.33	0.33	9.94	41.13	50.00	-8.87	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The second: FG4CELL21700GP

Data: 32

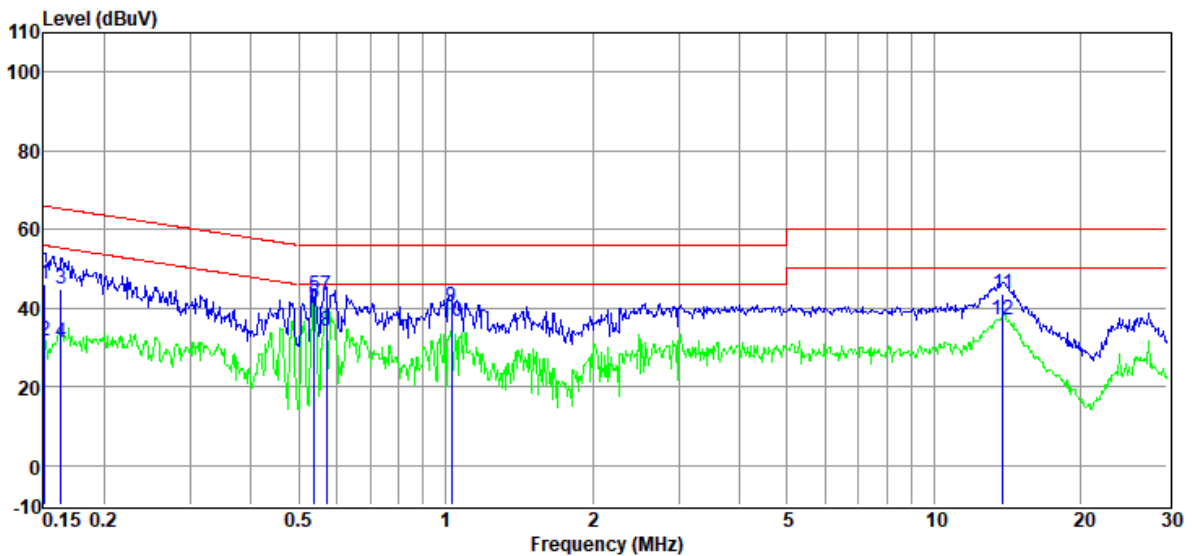

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	26.20	9.85	0.05	9.86	45.96	65.96	-20.00	QP	LINE
2	0.15	11.99	9.85	0.05	9.86	31.75	55.96	-24.21	Average	LINE
3	0.16	25.01	9.84	0.05	9.86	44.76	65.30	-20.54	QP	LINE
4	0.16	11.46	9.84	0.05	9.86	31.21	55.30	-24.09	Average	LINE
5	0.54	23.28	9.84	0.10	9.86	43.08	56.00	-12.92	QP	LINE
6	0.54	21.25	9.84	0.10	9.86	41.05	46.00	-4.95	Average	LINE
7	0.57	23.42	9.89	0.10	9.86	43.27	56.00	-12.73	QP	LINE
8	0.57	14.33	9.89	0.10	9.86	34.18	46.00	-11.82	Average	LINE
9	1.03	20.41	9.96	0.15	9.88	40.40	56.00	-15.60	QP	LINE
10	1.03	16.63	9.96	0.15	9.88	36.62	46.00	-9.38	Average	LINE
11	13.84	23.14	10.29	0.33	9.94	43.70	60.00	-16.30	QP	LINE
12	13.84	16.40	10.29	0.33	9.94	36.96	50.00	-13.04	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The second: FG4CELL21700GP

Data: 34

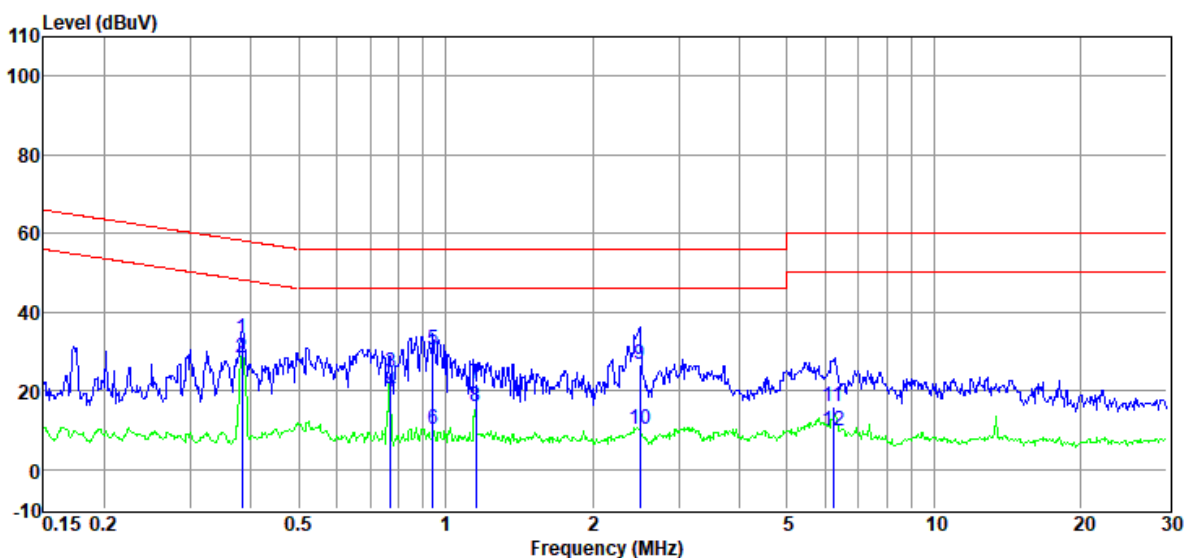

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.38	13.82	9.68	0.07	9.86	33.43	58.21	-24.78	QP	LINE
2	0.38	8.93	9.68	0.07	9.86	28.54	48.21	-19.67	Average	LINE
3	0.77	4.70	9.78	0.13	9.87	24.48	56.00	-31.52	QP	LINE
4	0.77	0.07	9.78	0.13	9.87	19.85	46.00	-26.15	Average	LINE
5	0.94	10.43	9.90	0.14	9.88	30.35	56.00	-25.65	QP	LINE
6	0.94	-9.57	9.90	0.14	9.88	10.35	46.00	-35.65	Average	LINE
7	1.15	1.76	9.93	0.15	9.88	21.72	56.00	-34.28	QP	LINE
8	1.15	-3.89	9.93	0.15	9.88	16.07	46.00	-29.93	Average	LINE
9	2.50	6.78	9.86	0.17	9.87	26.68	56.00	-29.32	QP	LINE
10	2.50	-9.87	9.86	0.17	9.87	10.03	46.00	-35.97	Average	LINE
11	6.22	-4.20	9.94	0.21	9.89	15.84	60.00	-44.16	QP	LINE
12	6.22	-10.36	9.94	0.21	9.89	9.68	50.00	-40.32	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 240V/50Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The second: FG4CELL21700GP

Data: 36

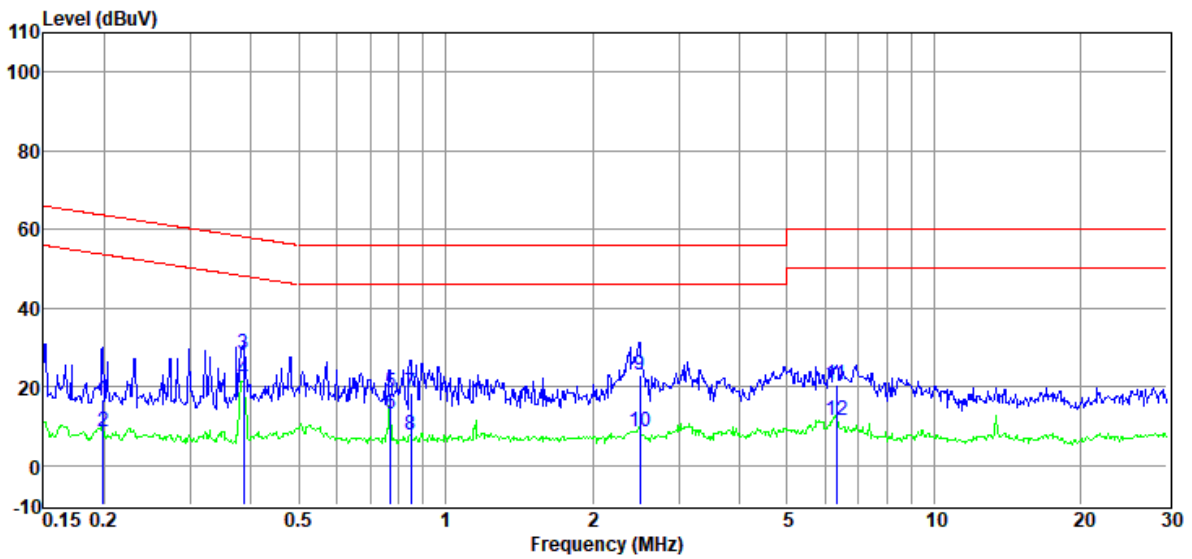

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.20	-3.09	9.82	0.06	9.86	16.65	63.67	-47.02	QP	NEUTRAL
2	0.20	-11.26	9.82	0.06	9.86	8.48	53.67	-45.19	Average	NEUTRAL
3	0.39	8.54	9.83	0.07	9.86	28.30	58.17	-29.87	QP	NEUTRAL
4	0.39	2.01	9.83	0.07	9.86	21.77	48.17	-26.40	Average	NEUTRAL
5	0.77	-1.44	9.84	0.13	9.87	18.40	56.00	-37.60	QP	NEUTRAL
6	0.77	-6.57	9.84	0.13	9.87	13.27	46.00	-32.73	Average	NEUTRAL
7	0.85	-1.20	9.84	0.14	9.88	18.66	56.00	-37.34	QP	NEUTRAL
8	0.85	-12.29	9.84	0.14	9.88	7.57	46.00	-38.43	Average	NEUTRAL
9	2.50	3.18	9.80	0.17	9.87	23.02	56.00	-32.98	QP	NEUTRAL
10	2.50	-11.22	9.80	0.17	9.87	8.62	46.00	-37.38	Average	NEUTRAL
11	6.32	0.52	9.86	0.21	9.89	20.48	60.00	-39.52	QP	NEUTRAL
12	6.32	-8.55	9.86	0.21	9.89	11.41	50.00	-38.59	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/NEUTRAL
Memo : The second: FG4CELL21700GP

Data: 38

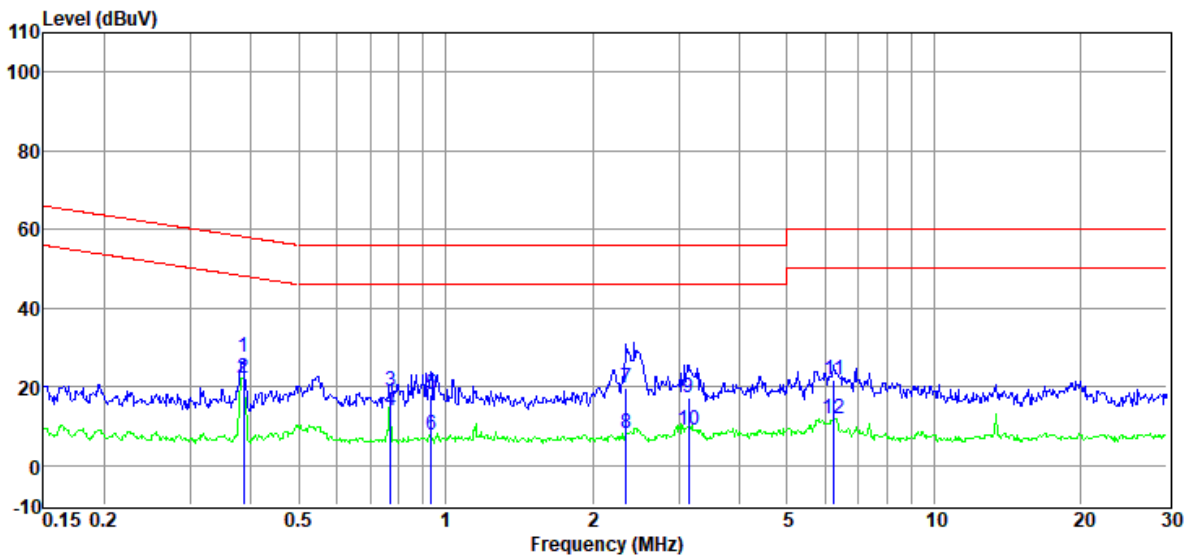


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6**
Test Date : 2025-09-05 **Tested By** : Alex Liu
EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO
Power Supply : AC 120V/60Hz **Test Mode** : Adapter charging + Aux in + MIC*2 + Guitar mode
Condition : TEMP:22.5°C, RH:61.1% **LISN** : 2025 1# 216/LINE
Memo : The second: FG4CELL21700GP

Data: 40

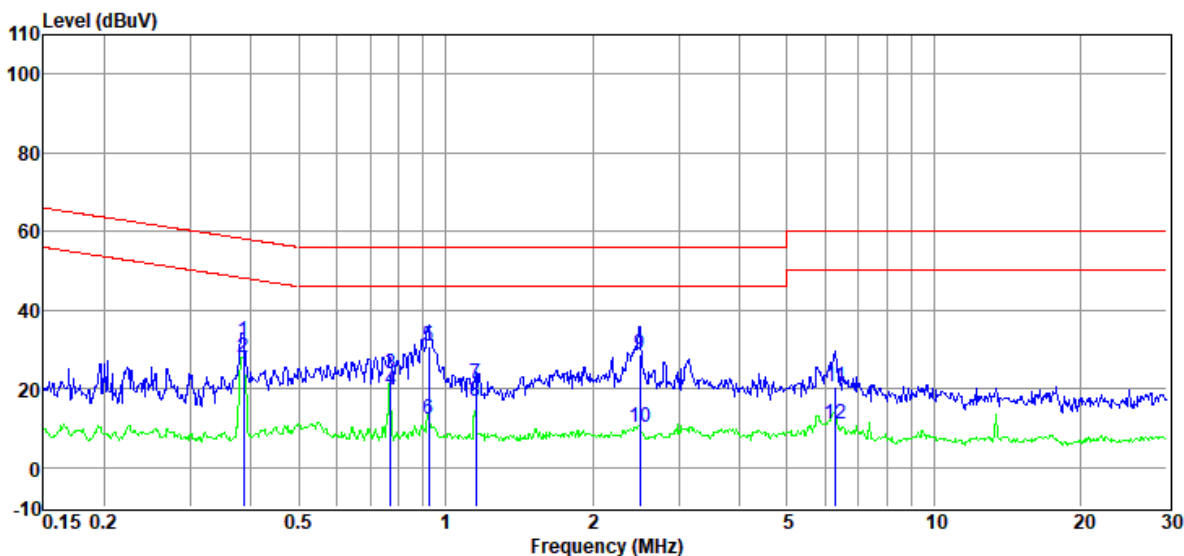

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.39	12.63	9.68	0.07	9.86	32.24	58.17	-25.93	QP	LINE
2	0.39	8.48	9.68	0.07	9.86	28.09	48.17	-20.08	Average	LINE
3	0.77	3.93	9.78	0.13	9.87	23.71	56.00	-32.29	QP	LINE
4	0.77	-0.16	9.78	0.13	9.87	19.62	46.00	-26.38	Average	LINE
5	0.92	11.02	9.88	0.14	9.88	30.92	56.00	-25.08	QP	LINE
6	0.92	-7.54	9.88	0.14	9.88	12.36	46.00	-33.64	Average	LINE
7	1.15	1.23	9.93	0.15	9.88	21.19	56.00	-34.81	QP	LINE
8	1.15	-3.35	9.93	0.15	9.88	16.61	46.00	-29.39	Average	LINE
9	2.50	8.90	9.86	0.17	9.87	28.80	56.00	-27.20	QP	LINE
10	2.50	-9.55	9.86	0.17	9.87	10.35	46.00	-35.65	Average	LINE
11	6.29	0.33	9.94	0.21	9.89	20.37	60.00	-39.63	QP	LINE
12	6.29	-8.86	9.94	0.21	9.89	11.18	50.00	-38.82	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 42

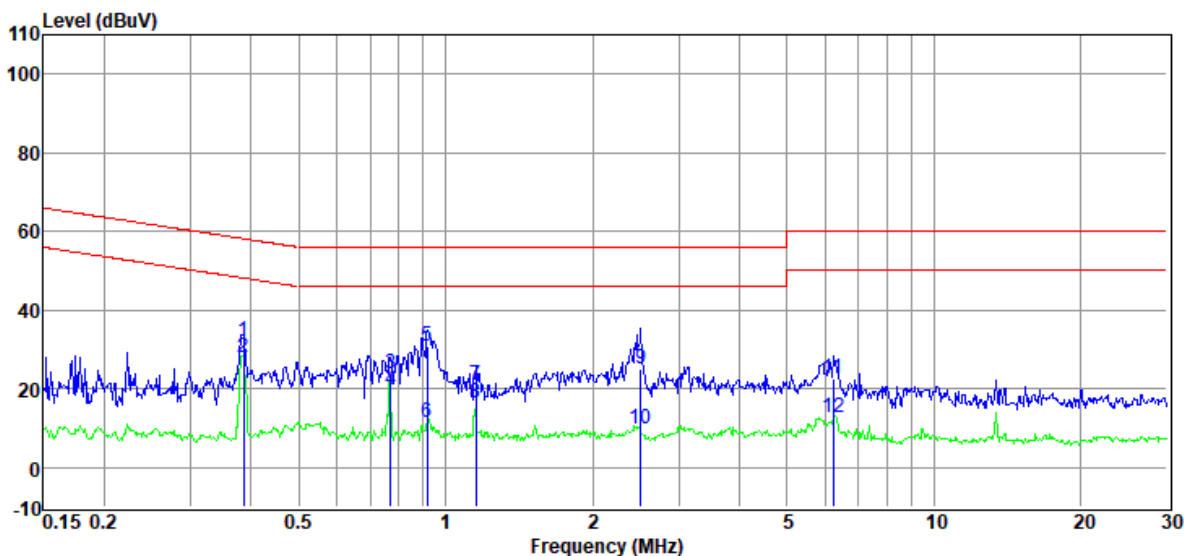

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.39	12.63	9.68	0.07	9.86	32.24	58.17	-25.93	QP	LINE
2	0.39	8.47	9.68	0.07	9.86	28.08	48.17	-20.09	Average	LINE
3	0.77	3.92	9.78	0.13	9.87	23.70	56.00	-32.30	QP	LINE
4	0.77	-0.14	9.78	0.13	9.87	19.64	46.00	-26.36	Average	LINE
5	0.92	10.76	9.87	0.14	9.88	30.65	56.00	-25.35	QP	LINE
6	0.92	-8.30	9.87	0.14	9.88	11.59	46.00	-34.41	Average	LINE
7	1.15	0.77	9.93	0.15	9.88	20.73	56.00	-35.27	QP	LINE
8	1.15	-3.38	9.93	0.15	9.88	16.58	46.00	-29.42	Average	LINE
9	2.51	5.33	9.86	0.17	9.87	25.23	56.00	-30.77	QP	LINE
10	2.51	-10.20	9.86	0.17	9.87	9.70	46.00	-36.30	Average	LINE
11	6.22	2.49	9.94	0.21	9.89	22.53	60.00	-37.47	QP	LINE
12	6.22	-7.45	9.94	0.21	9.89	12.59	50.00	-37.41	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 1# Shield Room

Test Date

: 2025-09-05

EUT

: Bluetooth Speaker

Power Supply

: AC 120V/60Hz

Condition

: TEMP:22.5°C, RH:61.1%

Memo

: The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6

Tested By

: Alex Liu

Model Number

: BANDBOX TRIO


Test Mode

: Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode

LISN

: 2025 1# 216/NEUTRAL

Data: 44

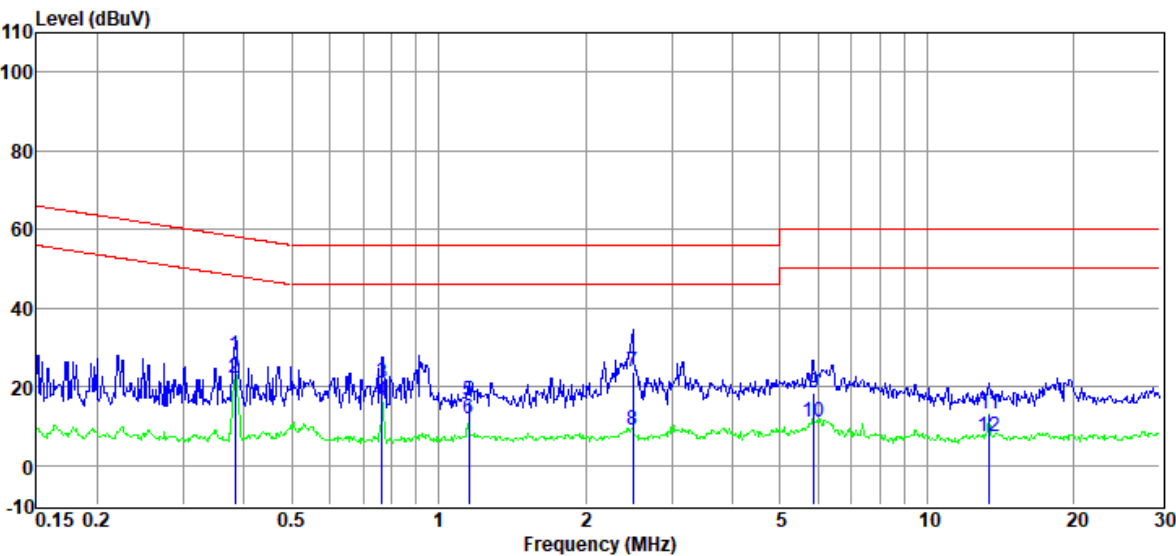

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.38	7.98	9.84	0.07	9.86	27.75	58.21	-30.46	QP	NEUTRAL
2	0.38	2.46	9.84	0.07	9.86	22.23	48.21	-25.98	Average	NEUTRAL
3	0.77	1.28	9.84	0.13	9.87	21.12	56.00	-34.88	QP	NEUTRAL
4	0.77	-3.63	9.84	0.13	9.87	16.21	46.00	-29.79	Average	NEUTRAL
5	1.15	-3.64	9.90	0.15	9.88	16.29	56.00	-39.71	QP	NEUTRAL
6	1.15	-7.96	9.90	0.15	9.88	11.97	46.00	-34.03	Average	NEUTRAL
7	2.50	3.91	9.80	0.17	9.87	23.75	56.00	-32.25	QP	NEUTRAL
8	2.50	-10.74	9.80	0.17	9.87	9.10	46.00	-36.90	Average	NEUTRAL
9	5.87	-1.40	9.86	0.21	9.88	18.55	60.00	-41.45	QP	NEUTRAL
10	5.87	-8.83	9.86	0.21	9.88	11.12	50.00	-38.88	Average	NEUTRAL
11	13.41	-7.65	10.31	0.32	9.94	12.92	60.00	-47.08	QP	NEUTRAL
12	13.41	-13.17	10.31	0.32	9.94	7.40	50.00	-42.60	Average	NEUTRAL

- Note:
1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).


4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
LISN : 2025 1# 216/NEUTRAL

Data: 46

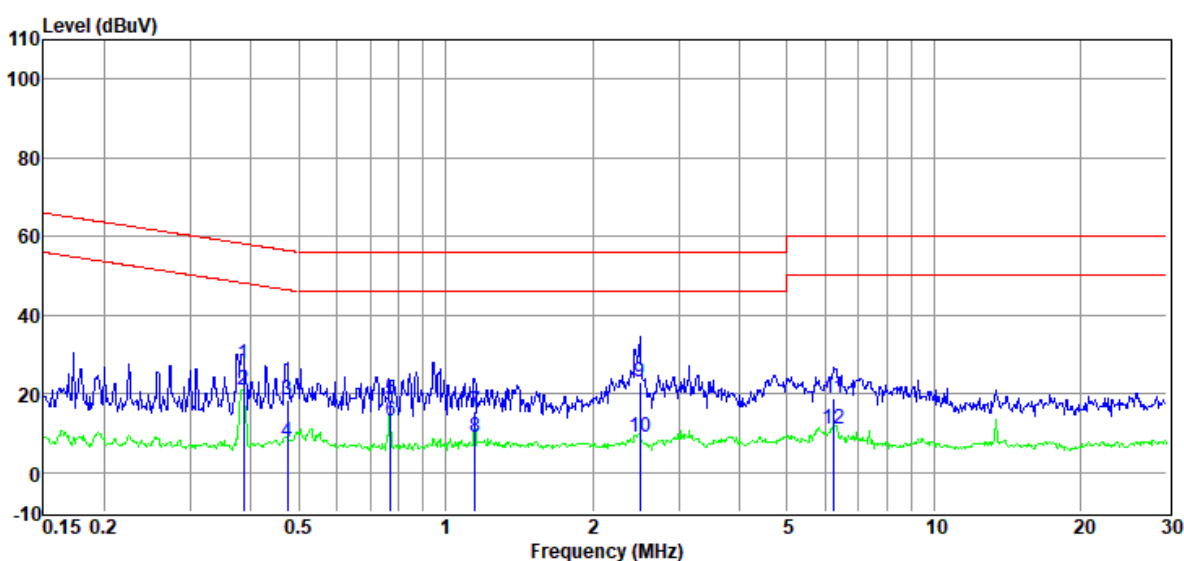

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.39	7.68	9.83	0.07	9.86	27.44	58.17	-30.73	QP	NEUTRAL
2	0.39	1.20	9.83	0.07	9.86	20.96	48.17	-27.21	Average	NEUTRAL
3	0.47	-1.30	9.88	0.09	9.86	18.53	56.45	-37.92	QP	NEUTRAL
4	0.47	-11.97	9.88	0.09	9.86	7.86	46.45	-38.59	Average	NEUTRAL
5	0.77	-1.33	9.84	0.13	9.87	18.51	56.00	-37.49	QP	NEUTRAL
6	0.77	-6.70	9.84	0.13	9.87	13.14	46.00	-32.86	Average	NEUTRAL
7	1.15	-4.38	9.90	0.15	9.88	15.55	56.00	-40.45	QP	NEUTRAL
8	1.15	-10.83	9.90	0.15	9.88	9.10	46.00	-36.90	Average	NEUTRAL
9	2.50	3.28	9.80	0.17	9.87	23.12	56.00	-32.88	QP	NEUTRAL
10	2.50	-11.03	9.80	0.17	9.87	8.81	46.00	-37.19	Average	NEUTRAL
11	6.25	-1.25	9.86	0.21	9.89	18.71	60.00	-41.29	QP	NEUTRAL
12	6.25	-9.12	9.86	0.21	9.89	10.84	50.00	-39.16	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-05
EUT : Bluetooth Speaker
Power Supply : AC 240V/50Hz
Condition : TEMP:22.5°C, RH:61.1%
Memo : The second: FG4CELL21700GP

D:\2025 CE report data\Q25042508-2E 0821\0905 CE.EM6
Tested By : Alex Liu
Model Number : BANDBOX TRIO
Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar mode
LISN : 2025 1# 216/LINE

Data: 48

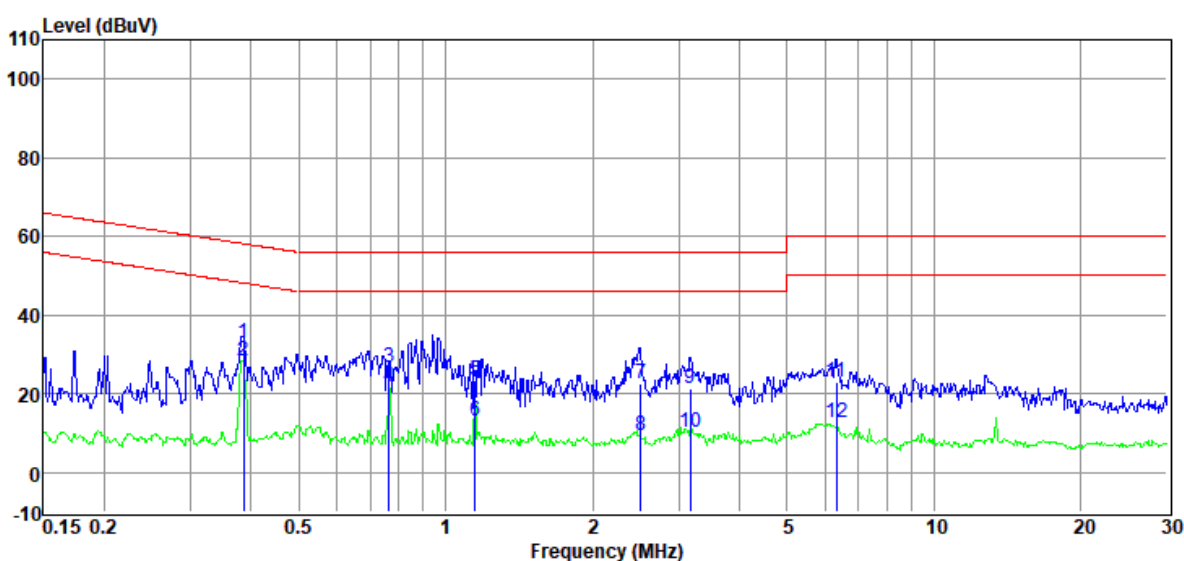

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.39	13.34	9.68	0.07	9.86	32.95	58.17	-25.22	QP	LINE
2	0.39	8.61	9.68	0.07	9.86	28.22	48.17	-19.95	Average	LINE
3	0.77	6.82	9.79	0.13	9.87	26.61	56.00	-29.39	QP	LINE
4	0.77	2.11	9.79	0.13	9.87	21.90	46.00	-24.10	Average	LINE
5	1.15	3.54	9.93	0.15	9.88	23.50	56.00	-32.50	QP	LINE
6	1.15	-6.72	9.93	0.15	9.88	13.24	46.00	-32.76	Average	LINE
7	2.51	2.66	9.86	0.17	9.87	22.56	56.00	-33.44	QP	LINE
8	2.51	-10.72	9.86	0.17	9.87	9.18	46.00	-36.82	Average	LINE
9	3.17	1.22	9.93	0.18	9.86	21.19	56.00	-34.81	QP	LINE
10	3.17	-9.87	9.93	0.18	9.86	10.10	46.00	-35.90	Average	LINE
11	6.32	2.92	9.93	0.21	9.89	22.95	60.00	-37.05	QP	LINE
12	6.32	-7.54	9.93	0.21	9.89	12.49	50.00	-37.51	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

3.8. Test photo



4. Radiated Emissions Test


4.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC00522	2026/07/22
RE Cable below 1GHz for 1#RE	R&S	ESU8/RF1	DDT-ZC00567	2026/07/06
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/
Spectrum Analyzer	Agilent	E4440A	DDT-ZC01445	2026/03/28
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/08/18
RF cable	Zhongke Junchuang	JCTB810-NJ-NJ-7M	DDT-ZC02759	2026/07/22
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Horn Antenna	SCHWARZBEC K	BBHA9120 D	DDT-ZC01218	2027/08/13
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026/08/10
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2026/07/06


4.2. Block diagram of test setup

Below 1 GHz


For table-top equipment

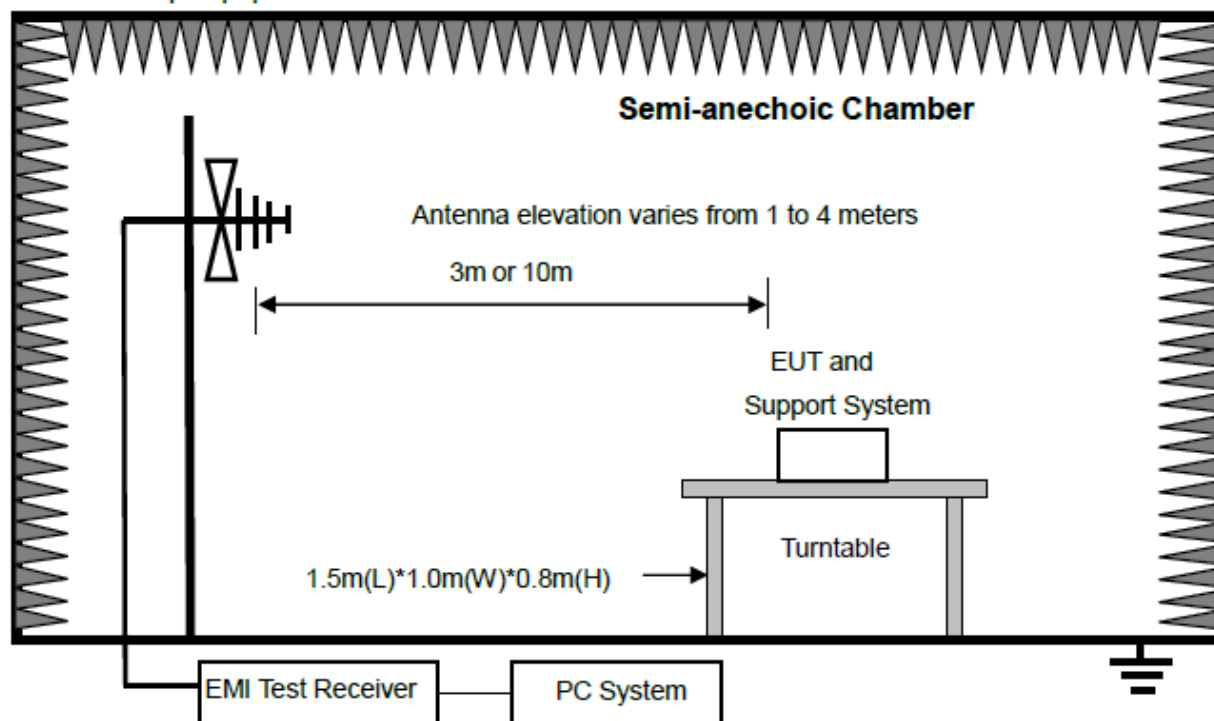

For floor standing equipment

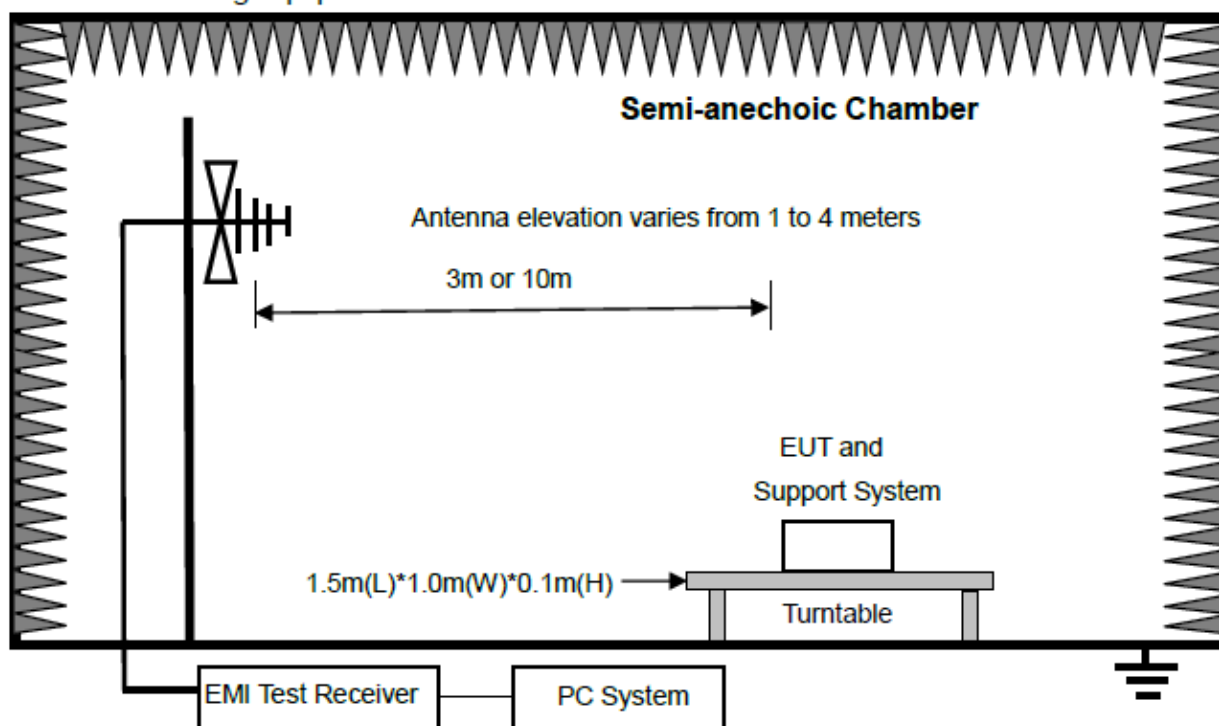


For combinations equipment

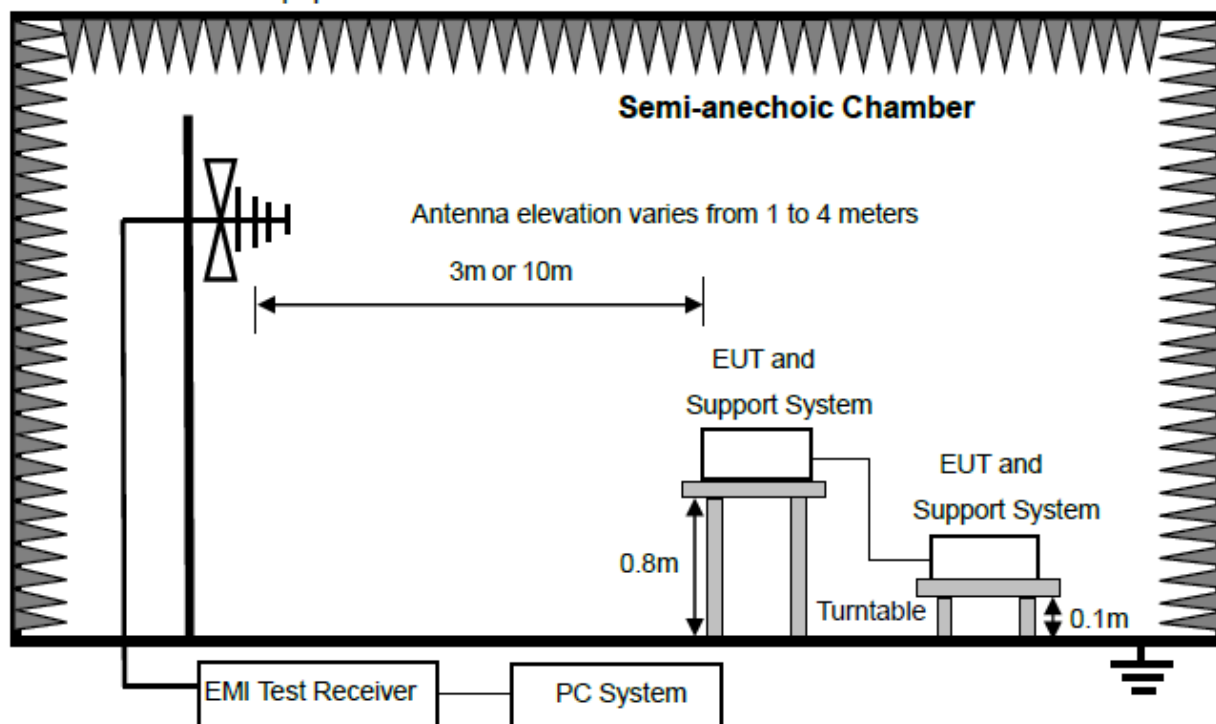


Above 1 GHz


For table-top equipment

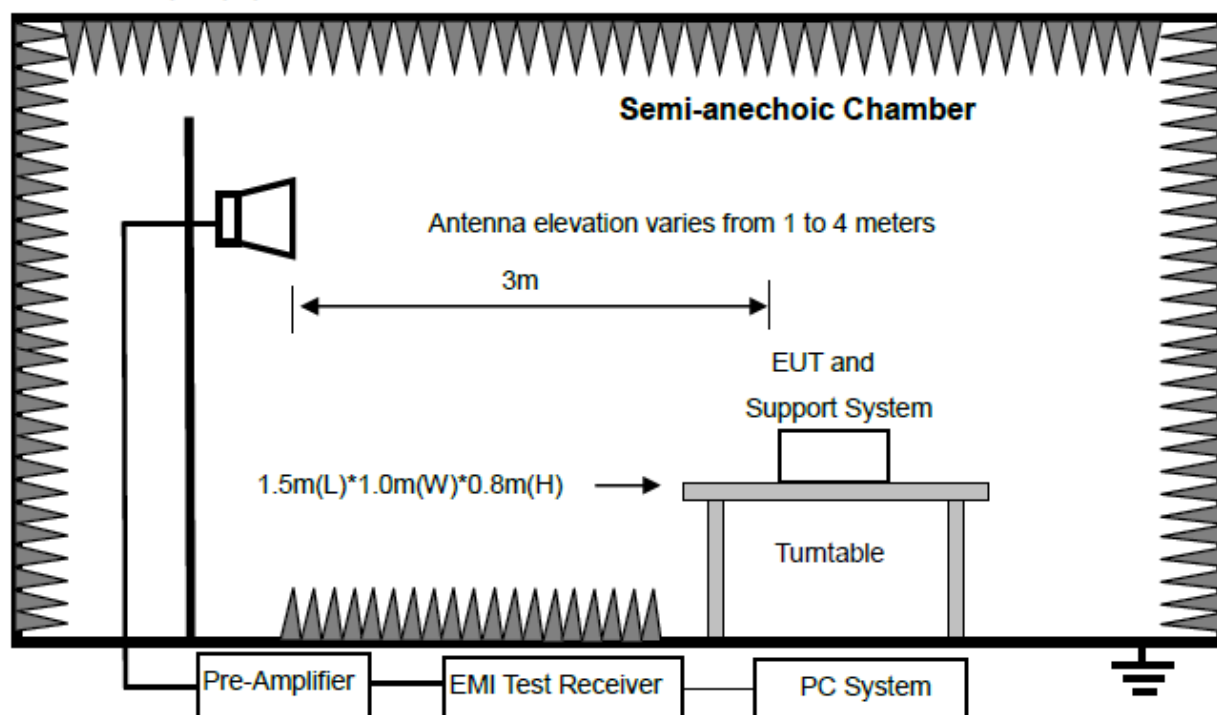

For floor standing equipment

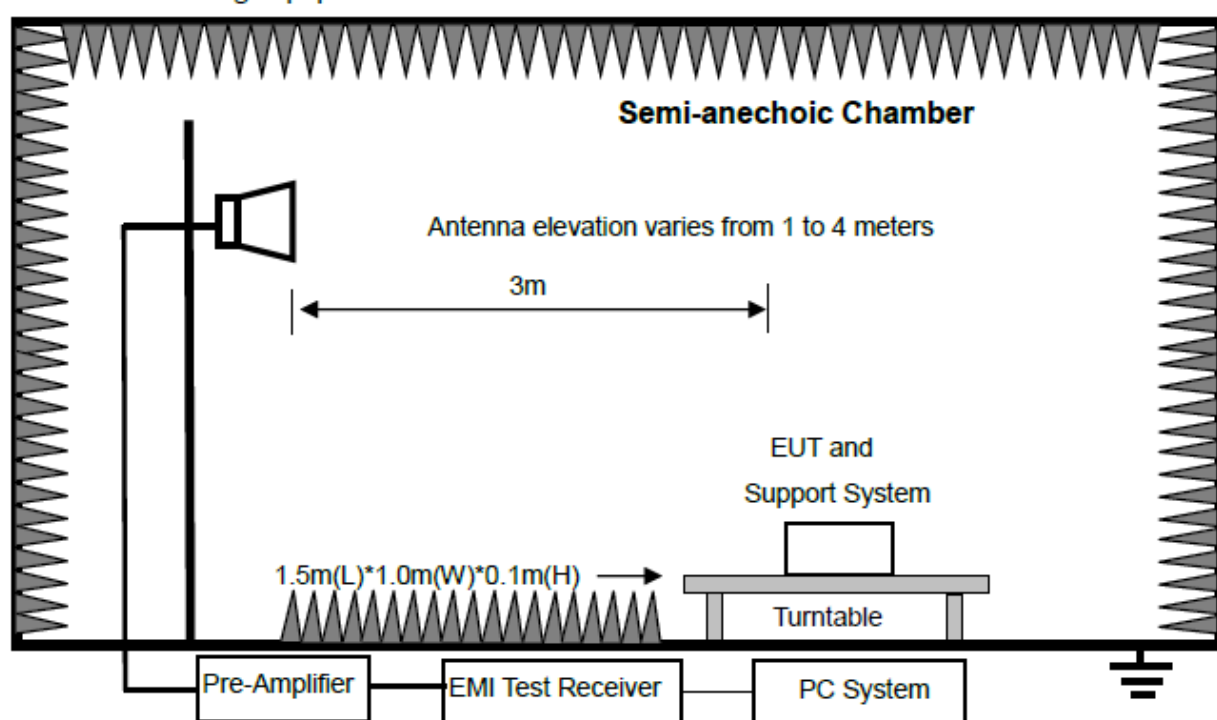

For combinations equipment

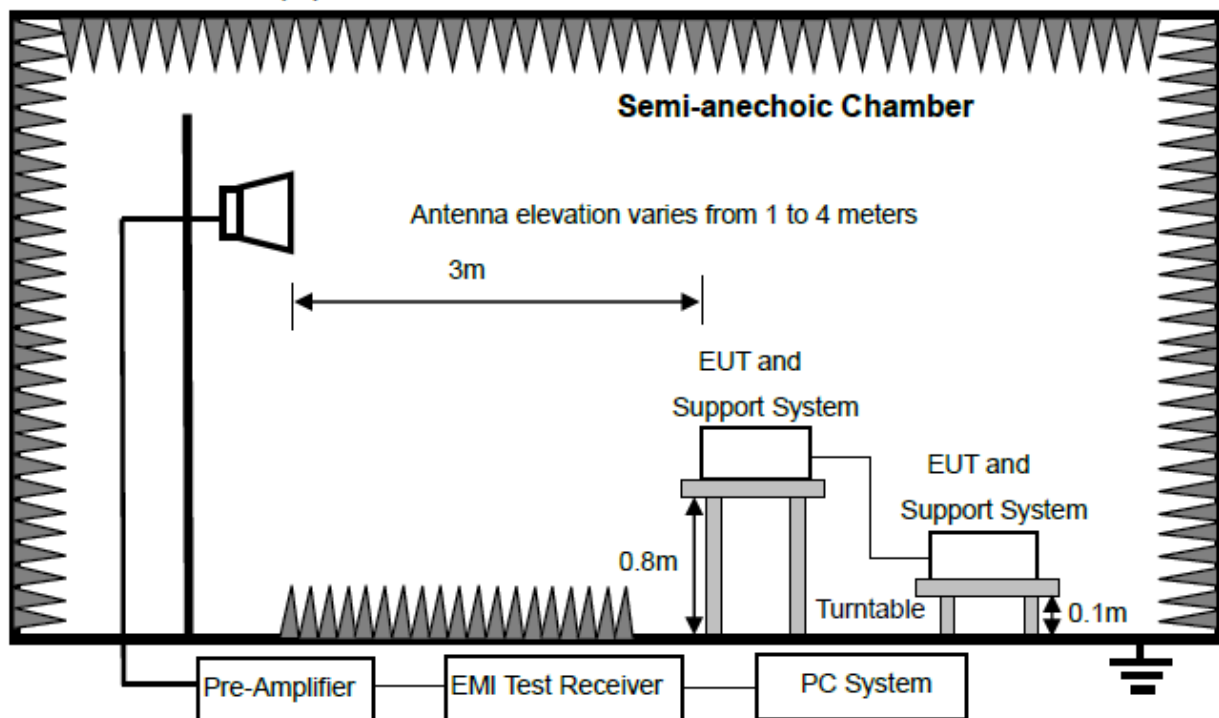

4.3. Limits

For FCC Rules and Regulations Part 15 Subpart B limits:

Frequency (MHz)	Class A Field Strengths Limits at 10m measuring distance dB(μ V)/m	Class A Field Strengths Limits at 3m measuring distance dB(μ V)/m	Class B Field Strengths Limits at 10m measuring distance dB(μ V)/m	Class B Field Strengths Limits at 3m measuring distance dB(μ V)/m
30--88	39.0	49.5	29.5	40.0
88--216	43.5	54.0	33.0	43.5
216--960	46.4	57.0	35.5	46.0
960--1000	49.5	60.0	43.5	54.0
Above 1000	/	80.0 (Peak), 60.0 (Average)	/	74.0 (Peak), 54.0 (Average)

For ICES-003 Issue 7 limits:

Frequency (MHz)	Class A Field Strengths Limits at 10m measuring distance dB(μ V)/m	Class A Field Strengths Limits at 3m measuring distance dB(μ V)/m	Class B Field Strengths Limits at 10m measuring distance dB(μ V)/m	Class B Field Strengths Limits at 3m measuring distance dB(μ V)/m
30--88	40.0	50.0	30.0	40.0
88--216	43.5	54.0	33.1	43.5
216--230	46.4	56.9	35.6	46.0
230--960	47.0	57.0	37.0	47.0
960--1000	49.5	60.0	43.5	54.0

Above 1000	/	80.0 (Peak), 60.0 (Average)	/	74.0 (Peak), 54.0 (Average)
------------	---	--------------------------------	---	--------------------------------

4.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Mobile phone	HUAWEI	MATE 20	N/A	N/A
Mobile phone	Apple	iPhone 15	N/A	N/A
Guitar	Fender electric guitar	N/A	ICSH20027765	N/A
AUX IN cable	N/A	N/A	Length: 1.00m, unshielded, non-magnetic ring	N/A
USB Cable	N/A	N/A	Length: 1.00m, unshielded, non-magnetic ring	N/A
Load	N/A	N/A	1.66/5 Ω	N/A
USB Flash	Kingston	DT101 G2	N/A	N/A
Bluetooth Speaker	Harman	BANDBOX TRIO	N/A	N/A
MIC	N/A	N/A	N/A	N/A
Laptop	HP	HP ZHAN 66 Pro A 14 G5	HP notebooks	N/A
Earphone	N/A	N/A	N/A	N/A
Adapter	HUAWEI	HW-100400C01 JB91L6L7S0403 1	N/A	N/A

4.5. Test procedure

Procedure of Preliminary Test

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 0.8m (table-top device)/0.1m (floor stand device) above the ground plane.

Configuration EUT to simulate typical usage as described in as shown above block diagram and equipment list of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30 MHz to \square 1 GHz/ \boxtimes 18 GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

After the preliminary scan, we found the test mode producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30 MHz to ☐ 1 GHz/☒ 18 GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

For emissions from 30 MHz to 1 GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.

For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz VBW is set at 3 MHz.

The test data of the worst-case condition(s) was recorded.

4.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.

Note 2: "-----" means Peak detection.

4.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6**

Test Date : 2025-08-20 **Tested By** : Antony Zeng


EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO

Power Supply : AC 120V/60Hz **Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode

Condition : Temp:21.8°C, Humi:58.1% **Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL

Memo : The first: FG4CELL21201

Data: 1

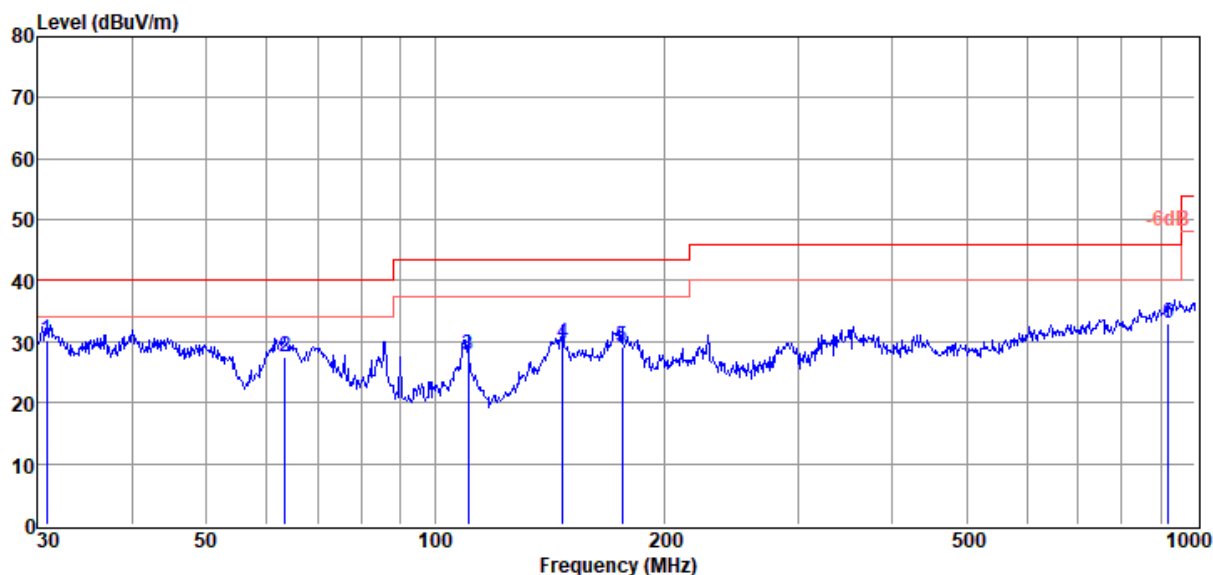

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.85	15.89	10.91	3.36	30.16	40.00	9.84	QP	VERTICAL
2	63.54	11.41	12.49	3.70	27.60	40.00	12.40	QP	VERTICAL
3	110.57	11.46	12.09	4.30	27.85	43.50	15.65	QP	VERTICAL
4	147.40	16.17	8.88	4.54	29.59	43.50	13.91	QP	VERTICAL
5	176.27	14.56	9.95	4.69	29.20	43.50	14.30	QP	VERTICAL
6	922.52	3.52	21.85	7.67	33.04	46.00	12.96	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 2

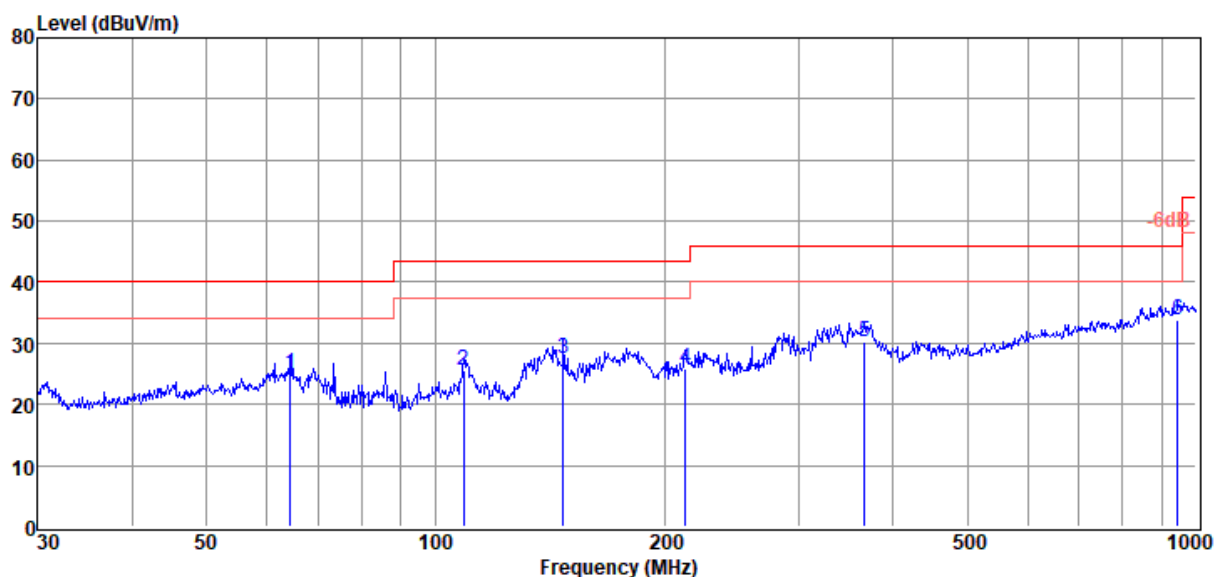

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.43	8.73	12.52	3.71	24.96	40.00	15.04	QP	HORIZONTAL
2	109.03	8.66	12.49	4.29	25.44	43.50	18.06	QP	HORIZONTAL
3	147.40	14.15	8.88	4.54	27.57	43.50	15.93	QP	HORIZONTAL
4	213.02	9.92	11.02	4.95	25.89	43.50	17.61	QP	HORIZONTAL
5	366.82	8.77	15.68	5.80	30.25	46.00	15.75	QP	HORIZONTAL
6	945.44	4.25	21.96	7.74	33.95	46.00	12.05	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 3

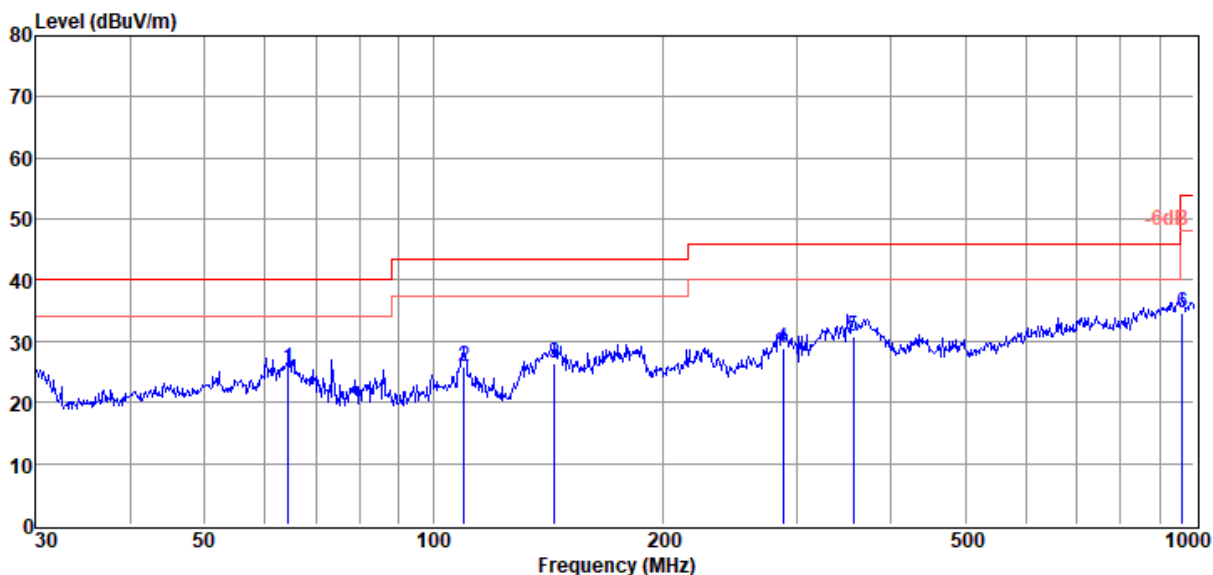

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.43	9.35	12.52	3.71	25.58	40.00	14.42	QP	HORIZONTAL
2	109.80	9.26	12.26	4.29	25.81	43.50	17.69	QP	HORIZONTAL
3	144.34	12.36	9.40	4.52	26.28	43.50	17.22	QP	HORIZONTAL
4	287.99	10.28	13.26	5.45	28.99	46.00	17.01	QP	HORIZONTAL
5	356.68	9.62	15.43	5.76	30.81	46.00	15.19	QP	HORIZONTAL
6	965.54	4.38	22.36	7.81	34.55	54.00	19.45	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 4

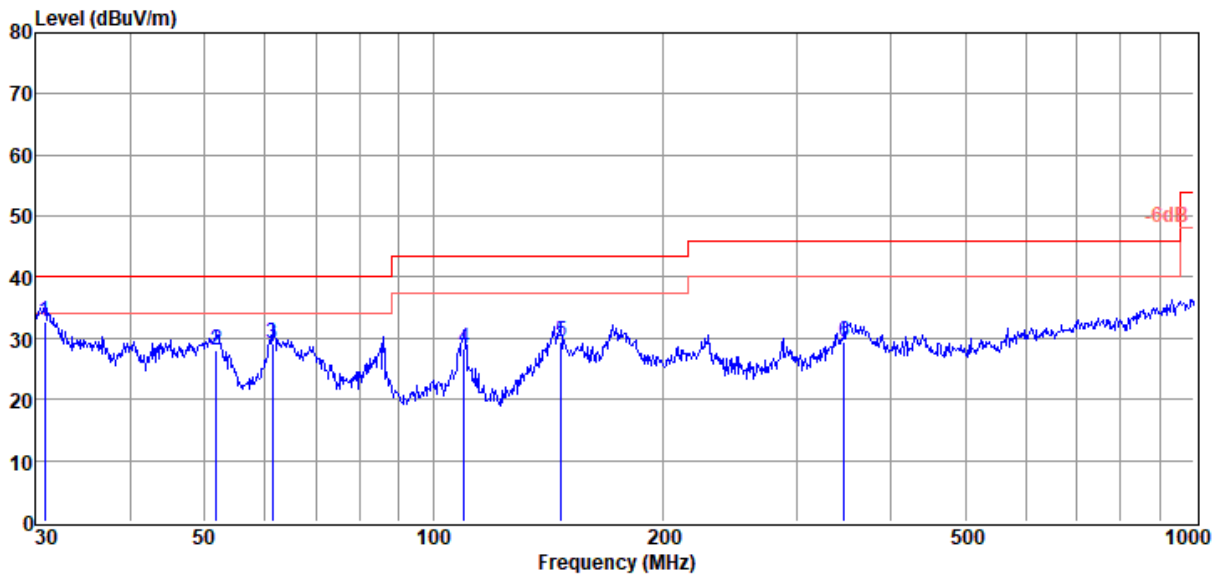

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.85	18.34	10.91	3.36	32.61	40.00	7.39	QP	VERTICAL
2	51.84	10.90	13.59	3.58	28.07	40.00	11.93	QP	VERTICAL
3	61.35	12.42	13.03	3.68	29.13	40.00	10.87	QP	VERTICAL
4	109.80	11.78	12.26	4.29	28.33	43.50	15.17	QP	VERTICAL
5	147.40	16.04	8.88	4.54	29.46	43.50	14.04	QP	VERTICAL
6	346.81	8.49	15.18	5.72	29.39	46.00	16.61	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 5

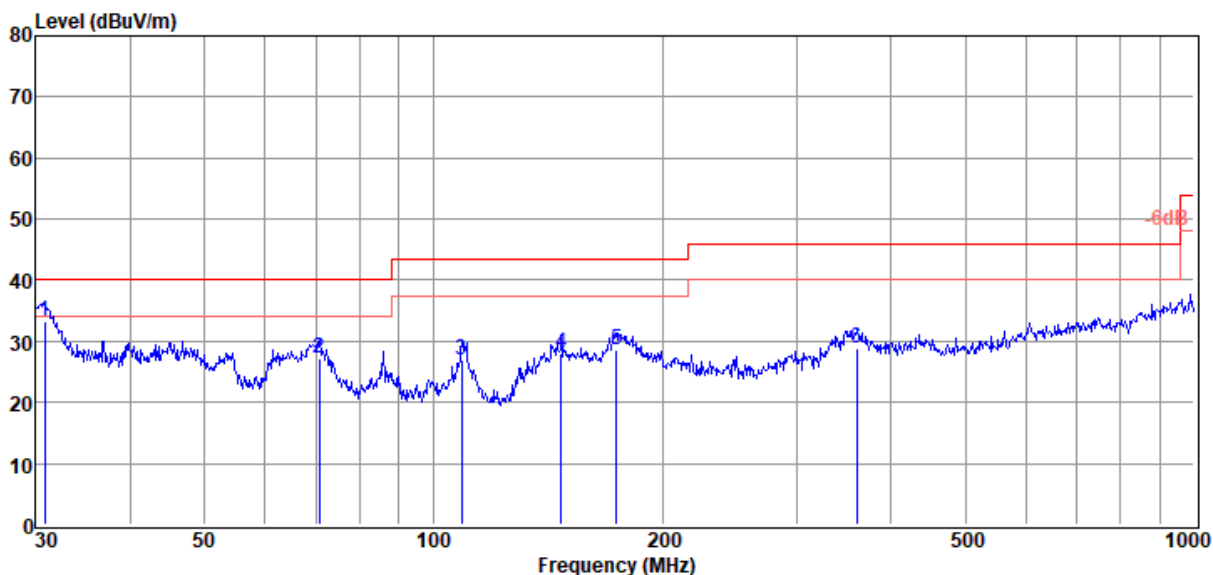

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.85	19.00	10.91	3.36	33.27	40.00	6.73	QP	VERTICAL
2	70.83	13.66	9.90	3.77	27.33	40.00	12.67	QP	VERTICAL
3	109.03	10.26	12.49	4.29	27.04	43.50	16.46	QP	VERTICAL
4	147.40	14.71	8.88	4.54	28.13	43.50	15.37	QP	VERTICAL
5	173.81	13.84	9.94	4.68	28.46	43.50	15.04	QP	VERTICAL
6	360.45	7.67	15.32	5.77	28.76	46.00	17.24	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 6

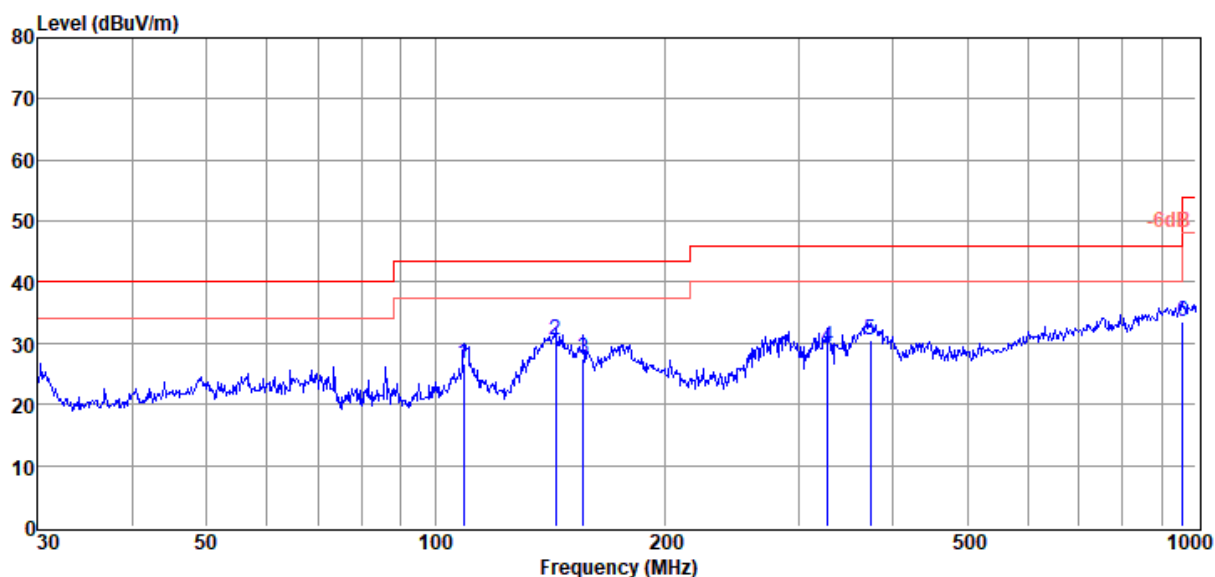

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	109.03	10.02	12.49	4.29	26.80	43.50	16.70	QP	HORIZONTAL
2	143.83	16.47	9.50	4.52	30.49	43.50	13.01	QP	HORIZONTAL
3	156.46	13.72	9.05	4.59	27.36	43.50	16.14	QP	HORIZONTAL
4	327.89	9.39	14.42	5.64	29.45	46.00	16.55	QP	HORIZONTAL
5	373.31	8.64	15.93	5.83	30.40	46.00	15.60	QP	HORIZONTAL
6	958.79	3.45	22.38	7.79	33.62	46.00	12.38	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 7

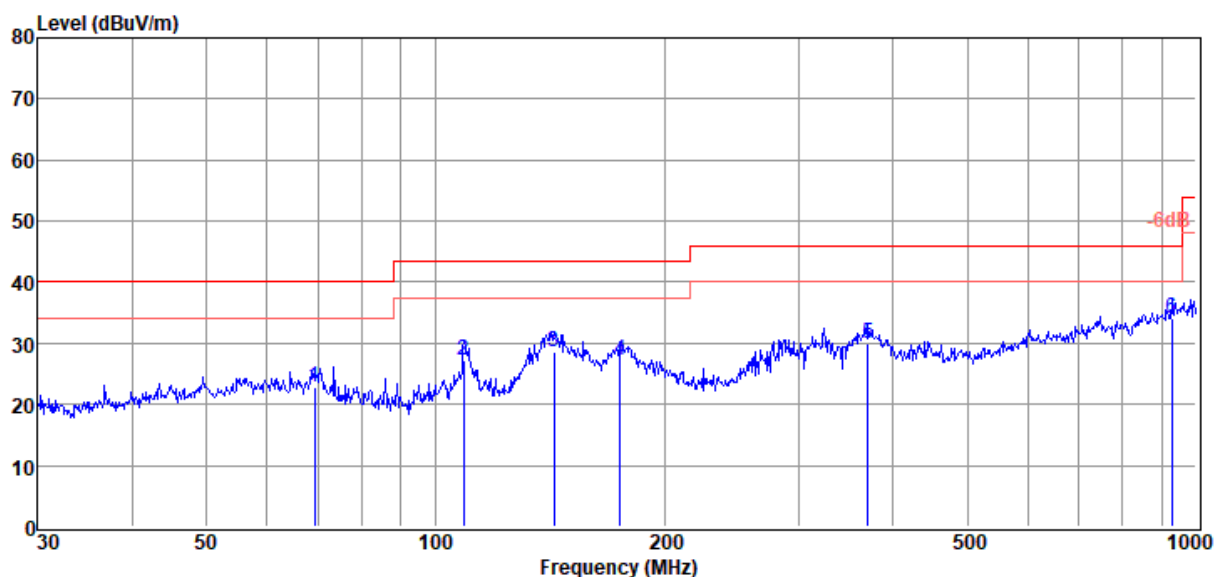

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	69.36	8.34	10.79	3.76	22.89	40.00	17.11	QP	HORIZONTAL
2	109.03	10.44	12.49	4.29	27.22	43.50	16.28	QP	HORIZONTAL
3	143.33	14.84	9.20	4.52	28.56	43.50	14.94	QP	HORIZONTAL
4	175.04	12.86	9.80	4.69	27.35	43.50	16.15	QP	HORIZONTAL
5	370.70	8.24	15.99	5.82	30.05	46.00	15.95	QP	HORIZONTAL
6	929.01	4.22	22.14	7.69	34.05	46.00	11.95	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 8

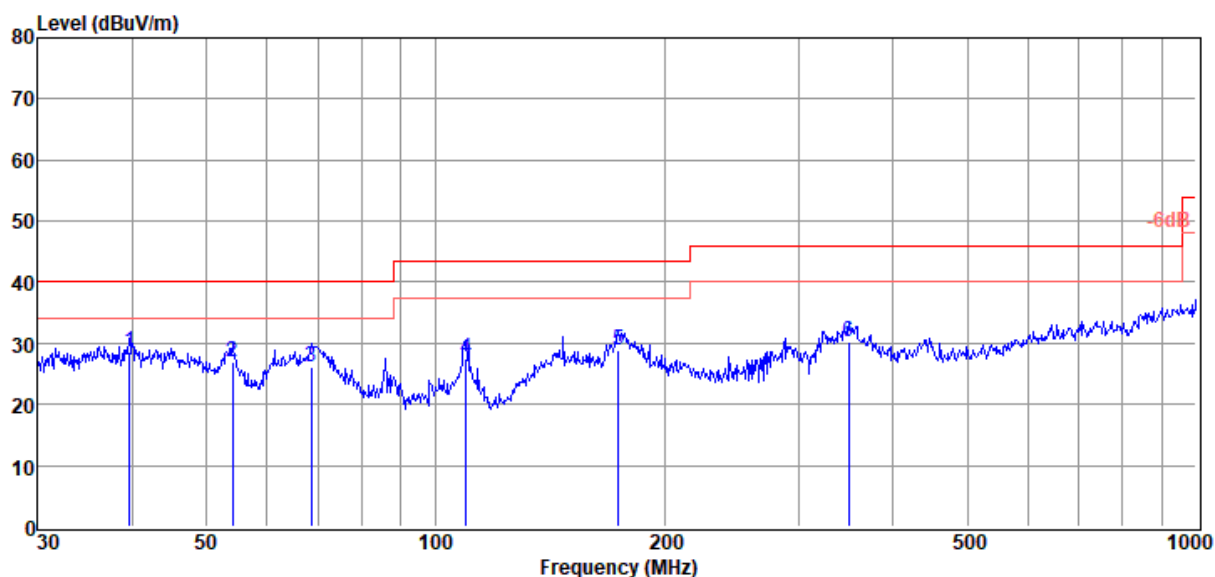

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	39.58	12.88	12.38	3.45	28.71	40.00	11.29	QP	VERTICAL
2	54.07	10.12	13.23	3.60	26.95	40.00	13.05	QP	VERTICAL
3	68.63	11.45	10.89	3.75	26.09	40.00	13.91	QP	VERTICAL
4	109.80	10.92	12.26	4.29	27.47	43.50	16.03	QP	VERTICAL
5	173.81	14.22	9.94	4.68	28.84	43.50	14.66	QP	VERTICAL
6	349.25	9.20	15.43	5.73	30.36	46.00	15.64	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 9

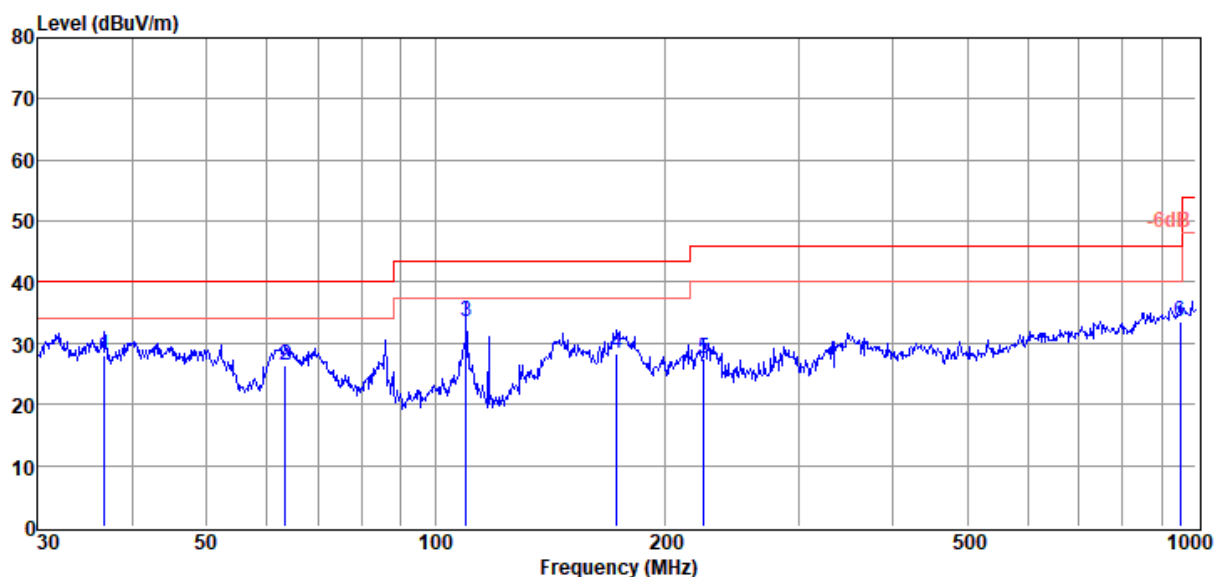

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.77	12.34	12.15	3.42	27.91	40.00	12.09	QP	VERTICAL
2	63.54	10.31	12.49	3.70	26.50	40.00	13.50	QP	VERTICAL
3	109.80	17.11	12.26	4.29	33.66	43.50	9.84	QP	VERTICAL
4	173.21	13.49	10.06	4.68	28.23	43.50	15.27	QP	VERTICAL
5	225.31	10.81	11.72	5.08	27.61	46.00	18.39	QP	VERTICAL
6	952.09	3.18	22.47	7.77	33.42	46.00	12.58	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 10

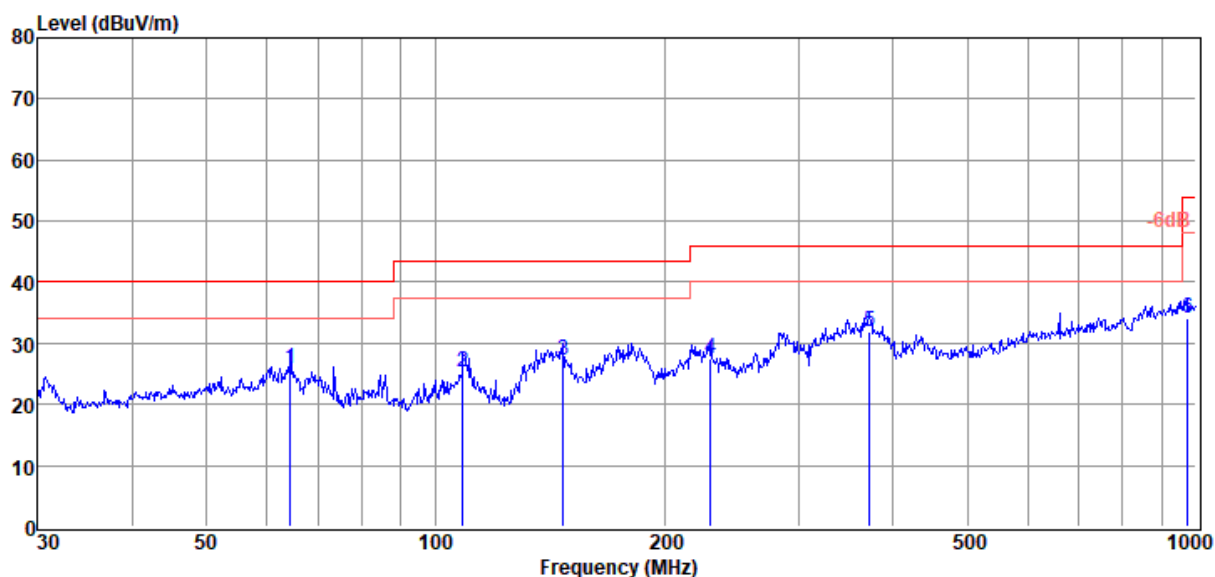

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	64.43	9.51	12.52	3.71	25.74	40.00	14.26	QP	HORIZONTAL
2	108.65	8.88	12.25	4.29	25.42	43.50	18.08	QP	HORIZONTAL
3	147.40	13.68	8.88	4.54	27.10	43.50	16.40	QP	HORIZONTAL
4	230.10	10.23	12.00	5.13	27.36	46.00	18.64	QP	HORIZONTAL
5	372.00	10.09	15.96	5.82	31.87	46.00	14.13	QP	HORIZONTAL
6	975.75	4.04	22.12	7.85	34.01	54.00	19.99	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20

Tested By : Antony Zeng

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode

Condition : Temp:21.8°C, Humi:58.1%

Antenna/Distance : 2023 VULB 9163 #1/3m/HORIZONTAL

Memo : The first: FG4CELL21201

Data: 11

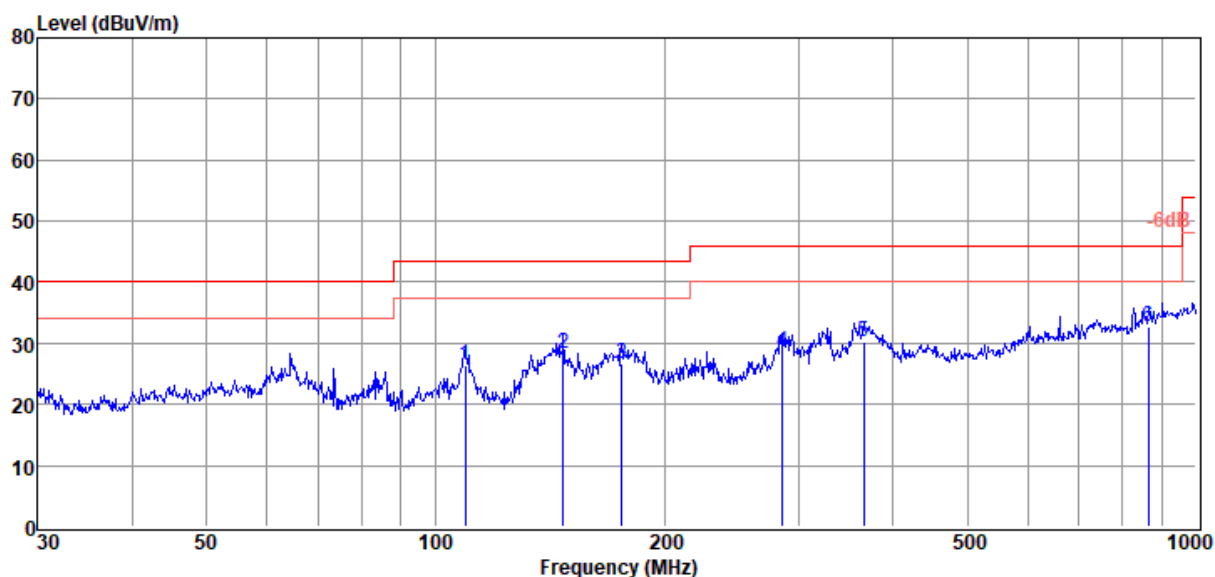

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	109.41	9.63	12.38	4.29	26.30	43.50	17.20	QP	HORIZONTAL
2	147.40	14.88	8.88	4.54	28.30	43.50	15.20	QP	HORIZONTAL
3	175.65	12.22	9.87	4.69	26.78	43.50	16.72	QP	HORIZONTAL
4	285.98	9.92	13.22	5.44	28.58	46.00	17.42	QP	HORIZONTAL
5	365.54	8.93	15.55	5.80	30.28	46.00	15.72	QP	HORIZONTAL
6	866.09	3.80	21.34	7.50	32.64	46.00	13.36	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 12

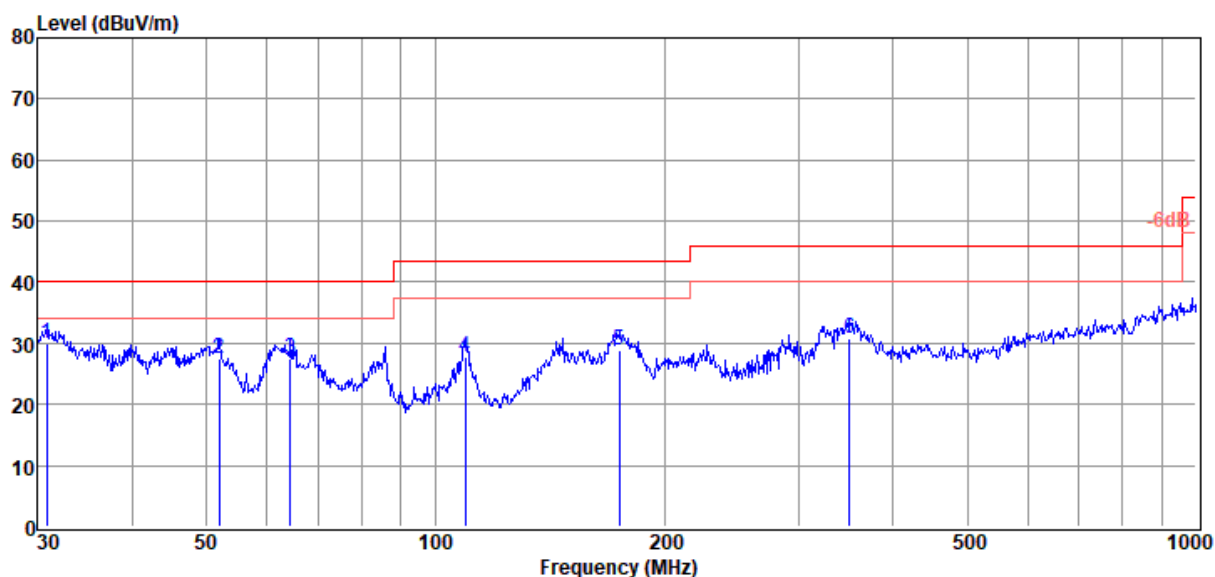

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	30.85	15.58	10.91	3.36	29.85	40.00	10.15	QP	VERTICAL
2	52.03	10.33	13.70	3.58	27.61	40.00	12.39	QP	VERTICAL
3	64.43	11.28	12.52	3.71	27.51	40.00	12.49	QP	VERTICAL
4	109.41	11.06	12.38	4.29	27.73	43.50	15.77	QP	VERTICAL
5	174.42	14.42	9.86	4.68	28.96	43.50	14.54	QP	VERTICAL
6	350.48	9.54	15.50	5.73	30.77	46.00	15.23	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 13

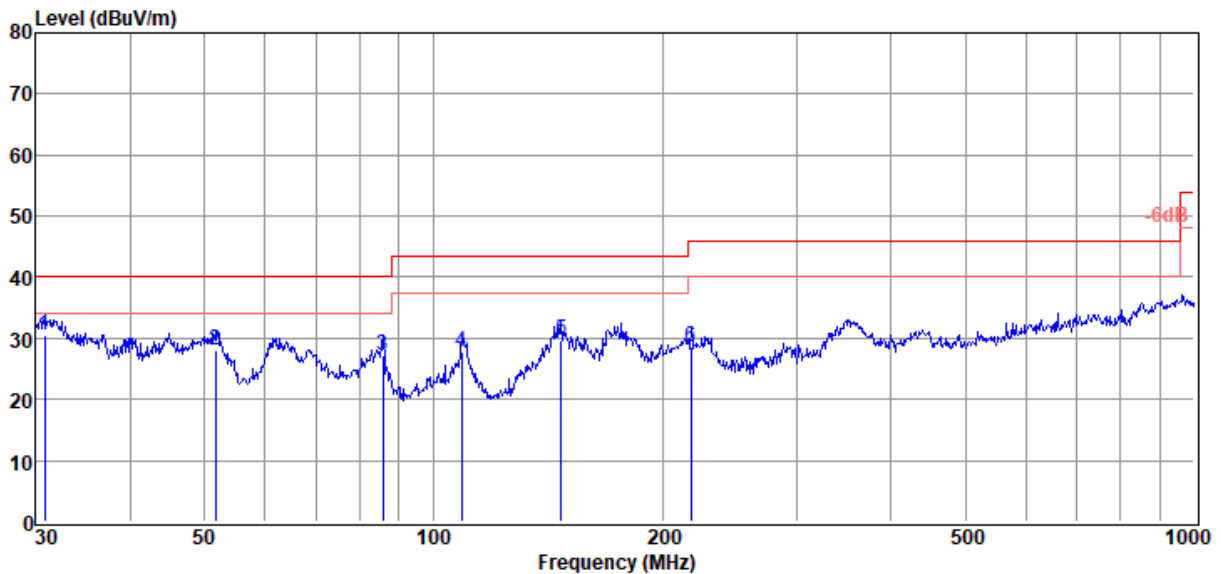

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.85	16.27	10.91	3.36	30.54	40.00	9.46	QP	VERTICAL
2	51.66	11.06	13.46	3.58	28.10	40.00	11.90	QP	VERTICAL
3	85.90	13.76	9.41	3.98	27.15	40.00	12.85	QP	VERTICAL
4	109.03	11.03	12.49	4.29	27.81	43.50	15.69	QP	VERTICAL
5	147.40	16.25	8.88	4.54	29.67	43.50	13.83	QP	VERTICAL
6	218.31	12.40	11.23	5.01	28.64	46.00	17.36	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 14

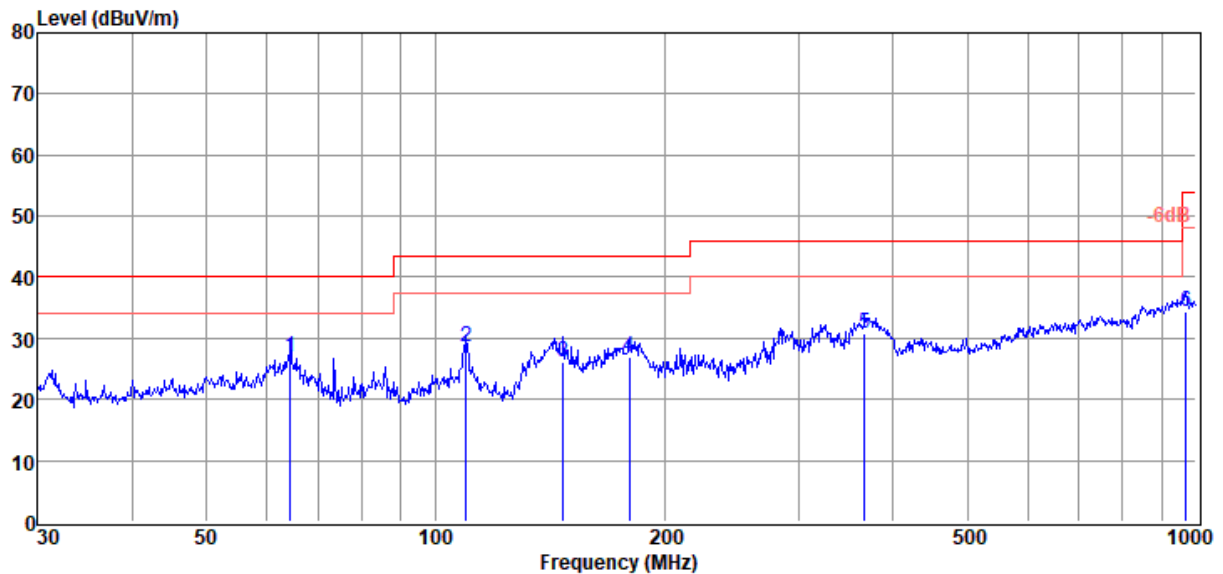

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	64.43	10.63	12.52	3.71	26.86	40.00	13.14	QP	HORIZONTAL
2	109.80	11.92	12.26	4.29	28.47	43.50	15.03	QP	HORIZONTAL
3	147.40	12.78	8.88	4.54	26.20	43.50	17.30	QP	HORIZONTAL
4	180.02	12.36	10.00	4.71	27.07	43.50	16.43	QP	HORIZONTAL
5	366.82	9.34	15.68	5.80	30.82	46.00	15.18	QP	HORIZONTAL
6	968.93	4.40	22.09	7.82	34.31	54.00	19.69	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 15

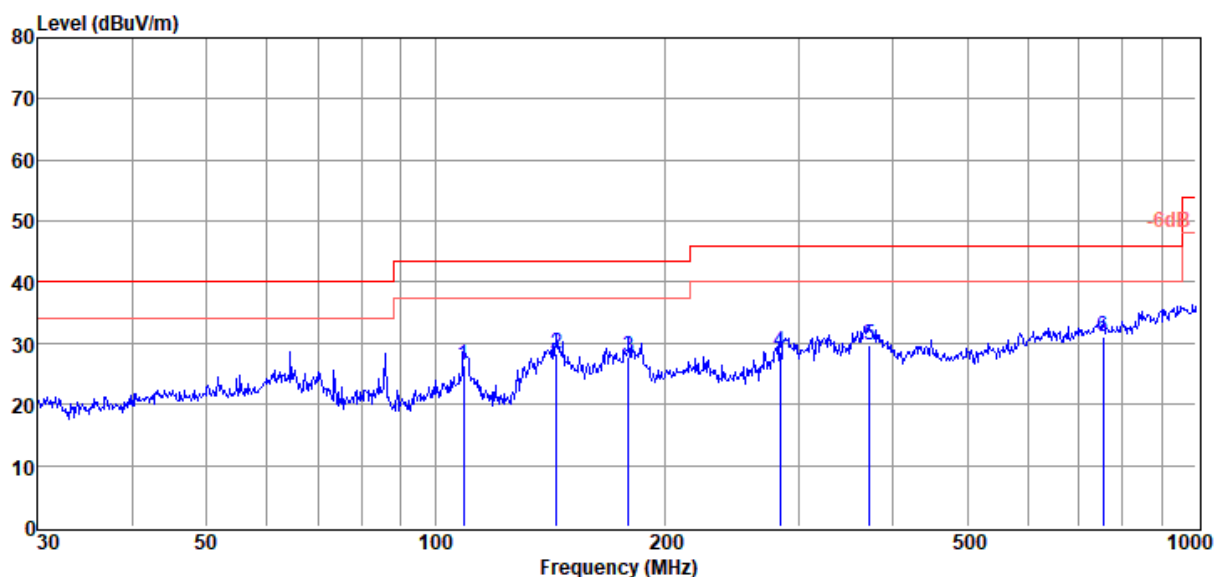

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	109.03	9.53	12.49	4.29	26.31	43.50	17.19	QP	HORIZONTAL
2	144.34	14.42	9.40	4.52	28.34	43.50	15.16	QP	HORIZONTAL
3	179.39	12.98	10.00	4.71	27.69	43.50	15.81	QP	HORIZONTAL
4	283.98	9.87	13.16	5.43	28.46	46.00	17.54	QP	HORIZONTAL
5	372.00	7.94	15.96	5.82	29.72	46.00	16.28	QP	HORIZONTAL
6	755.39	3.74	20.08	7.13	30.95	46.00	15.05	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 16

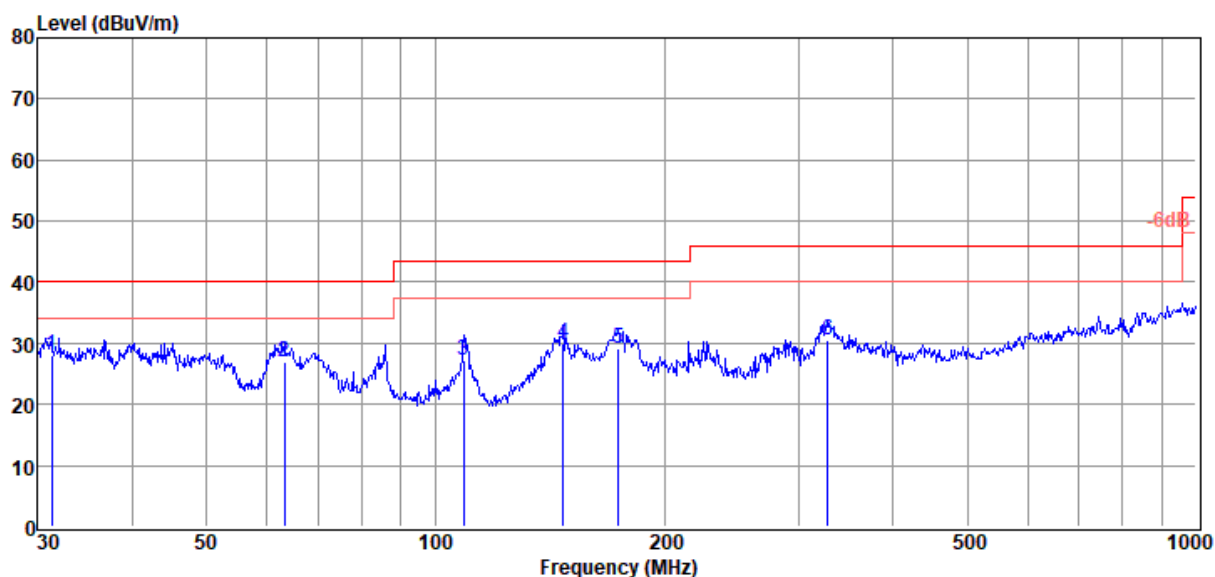

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	31.29	13.82	10.93	3.36	28.11	40.00	11.89	QP	VERTICAL
2	63.31	10.68	12.57	3.70	26.95	40.00	13.05	QP	VERTICAL
3	109.03	10.56	12.49	4.29	27.34	43.50	16.16	QP	VERTICAL
4	147.40	16.44	8.88	4.54	29.86	43.50	13.64	QP	VERTICAL
5	173.81	14.59	9.94	4.68	29.21	43.50	14.29	QP	VERTICAL
6	327.89	10.43	14.42	5.64	30.49	46.00	15.51	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 17

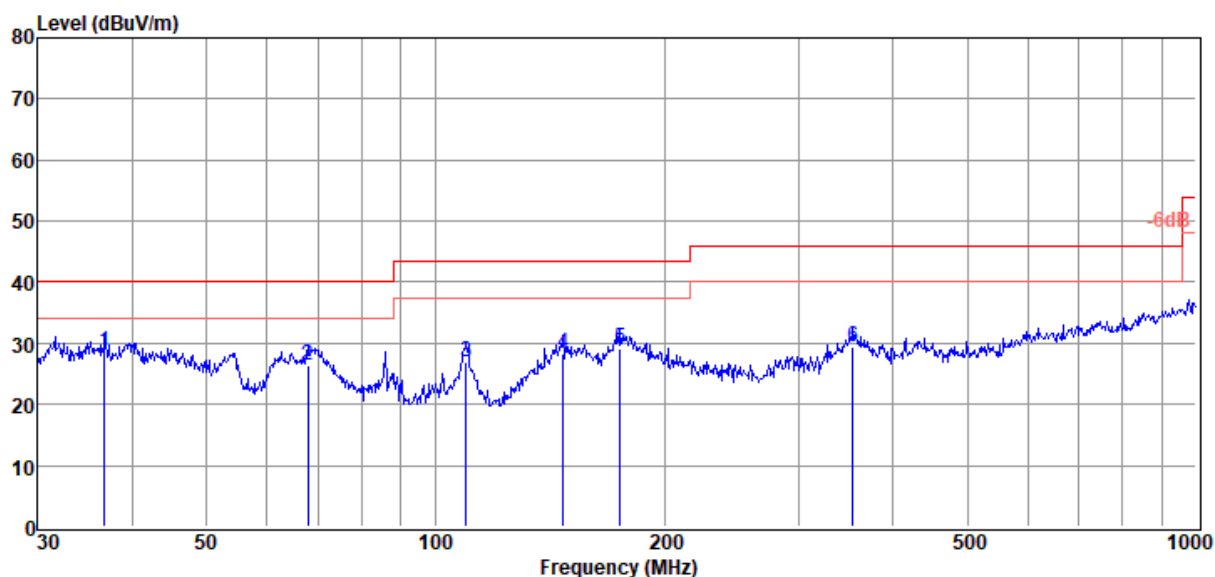

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.77	13.01	12.15	3.42	28.58	40.00	11.42	QP	VERTICAL
2	67.91	11.85	10.73	3.74	26.32	40.00	13.68	QP	VERTICAL
3	109.80	10.38	12.26	4.29	26.93	43.50	16.57	QP	VERTICAL
4	147.40	14.97	8.88	4.54	28.39	43.50	15.11	QP	VERTICAL
5	175.04	14.72	9.80	4.69	29.21	43.50	14.29	QP	VERTICAL
6	354.18	8.10	15.50	5.75	29.35	46.00	16.65	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 18

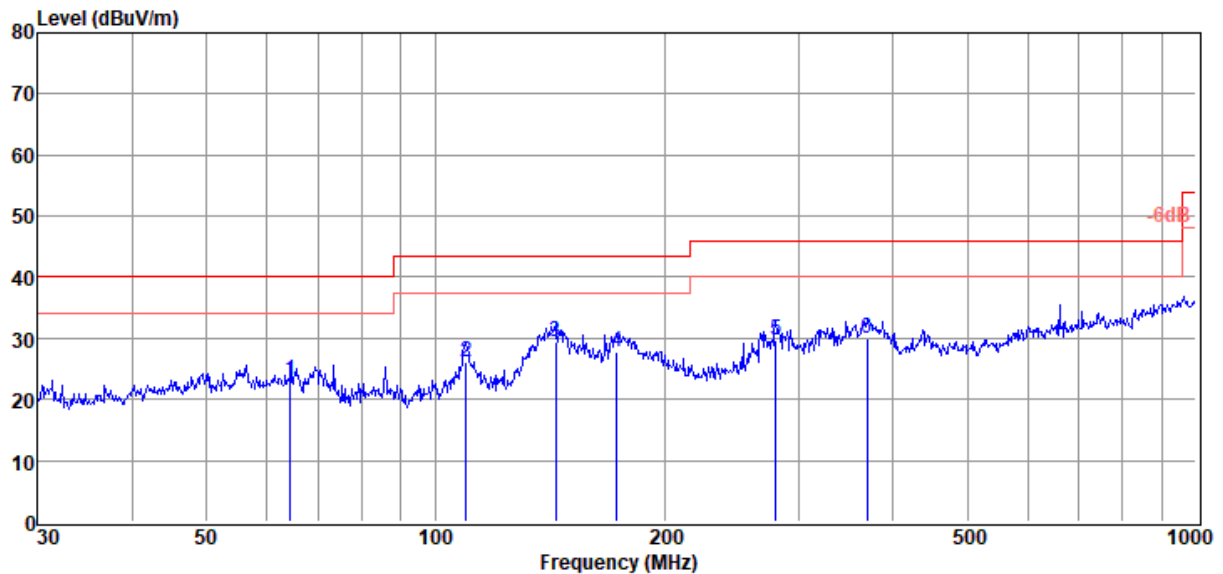

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.43	6.81	12.52	3.71	23.04	40.00	16.96	QP	HORIZONTAL
2	109.80	9.60	12.26	4.29	26.15	43.50	17.35	QP	HORIZONTAL
3	143.83	15.48	9.50	4.52	29.50	43.50	14.00	QP	HORIZONTAL
4	173.21	13.16	10.06	4.68	27.90	43.50	15.60	QP	HORIZONTAL
5	280.02	11.29	13.00	5.41	29.70	46.00	16.30	QP	HORIZONTAL
6	369.41	8.26	15.94	5.81	30.01	46.00	15.99	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 19

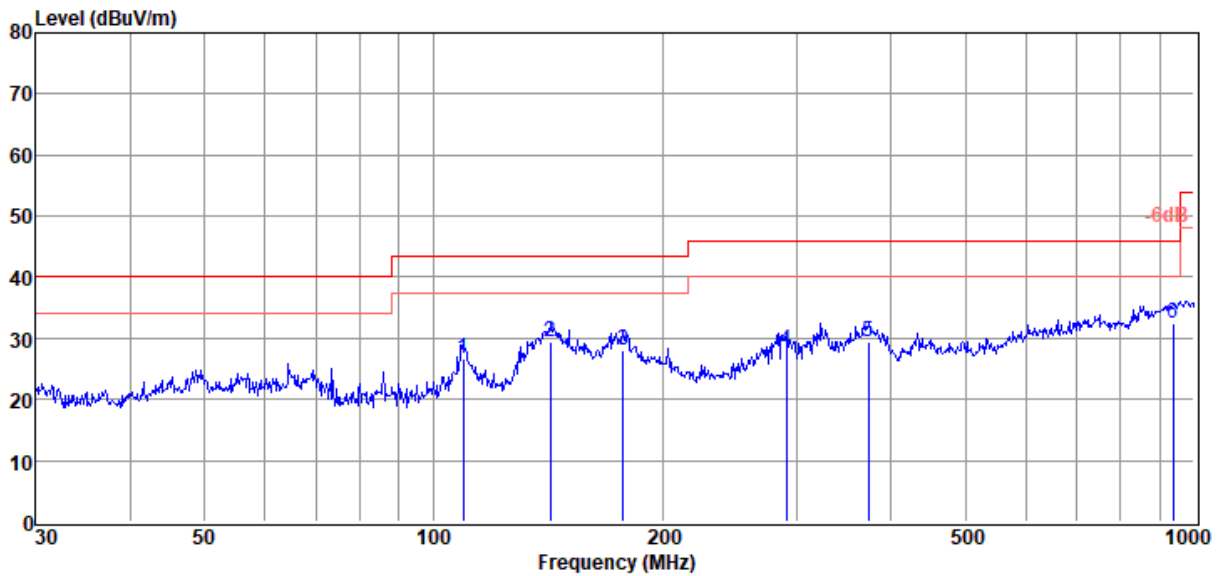

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	109.41	9.86	12.38	4.29	26.53	43.50	16.97	QP	HORIZONTAL
2	142.32	15.86	8.93	4.51	29.30	43.50	14.20	QP	HORIZONTAL
3	177.51	13.35	9.95	4.70	28.00	43.50	15.50	QP	HORIZONTAL
4	291.04	9.06	13.38	5.47	27.91	46.00	18.09	QP	HORIZONTAL
5	373.31	7.63	15.93	5.83	29.39	46.00	16.61	QP	HORIZONTAL
6	938.83	2.80	21.95	7.72	32.47	46.00	13.53	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 20

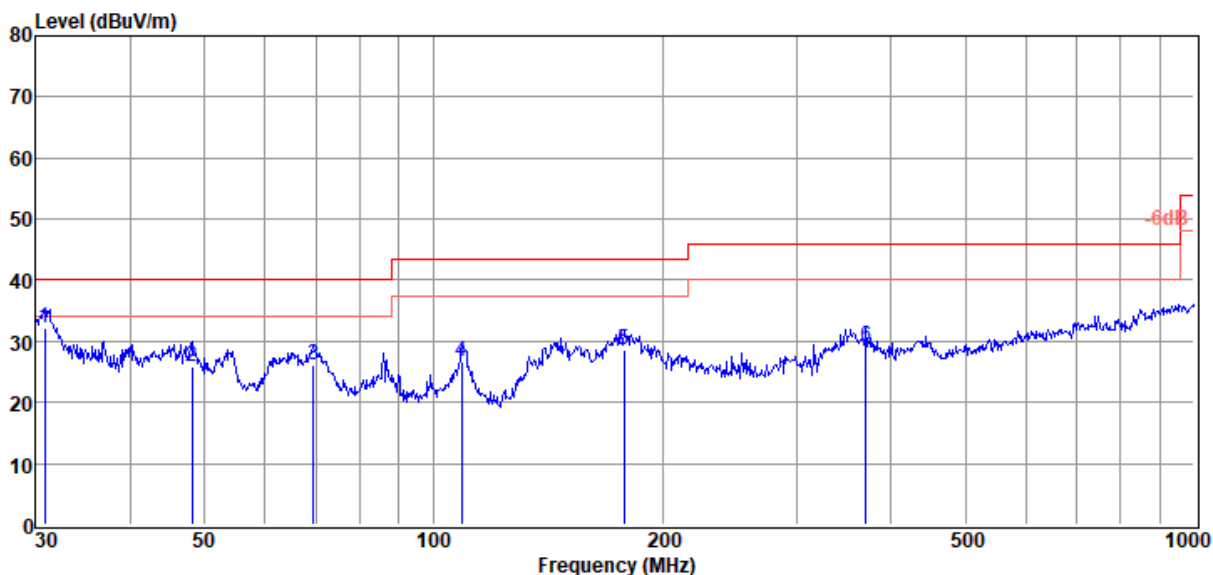

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.85	18.01	10.91	3.36	32.28	40.00	7.72	QP	VERTICAL
2	48.16	9.40	13.02	3.54	25.96	40.00	14.04	QP	VERTICAL
3	69.60	11.82	10.64	3.76	26.22	40.00	13.78	QP	VERTICAL
4	109.03	10.02	12.49	4.29	26.80	43.50	16.70	QP	VERTICAL
5	178.13	14.00	9.83	4.70	28.53	43.50	14.97	QP	VERTICAL
6	370.70	7.42	15.99	5.82	29.23	46.00	16.77	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Phone USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 21

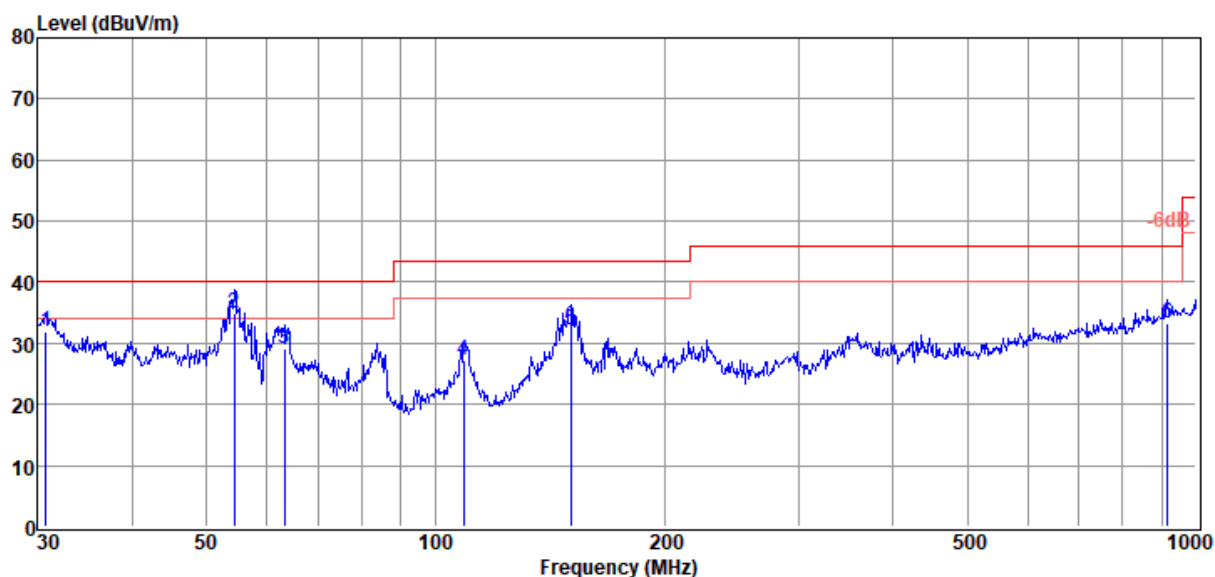

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.75	17.50	10.93	3.36	31.79	40.00	8.21	QP	VERTICAL
2	54.45	17.91	13.38	3.60	34.89	40.00	5.11	QP	VERTICAL
3	63.31	12.81	12.57	3.70	29.08	40.00	10.92	QP	VERTICAL
4	109.03	10.50	12.49	4.29	27.28	43.50	16.22	QP	VERTICAL
5	150.54	18.45	9.21	4.56	32.22	43.50	11.28	QP	VERTICAL
6	916.07	3.54	22.04	7.64	33.22	46.00	12.78	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Phone USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 22

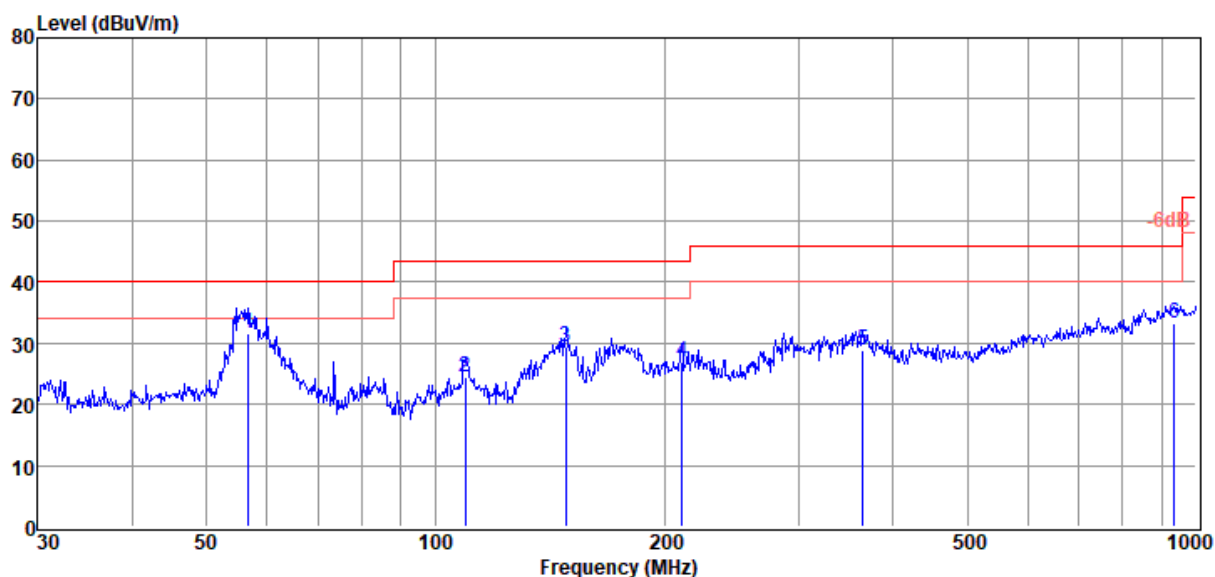

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	56.79	15.12	12.90	3.63	31.65	40.00	8.35	QP	HORIZONTAL
2	109.41	7.75	12.38	4.29	24.42	43.50	19.08	QP	HORIZONTAL
3	148.44	16.08	8.74	4.55	29.37	43.50	14.13	QP	HORIZONTAL
4	210.79	11.20	10.93	4.93	27.06	43.50	16.44	QP	HORIZONTAL
5	364.26	7.56	15.47	5.79	28.82	46.00	17.18	QP	HORIZONTAL
6	935.55	3.36	22.08	7.71	33.15	46.00	12.85	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Phone USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 23

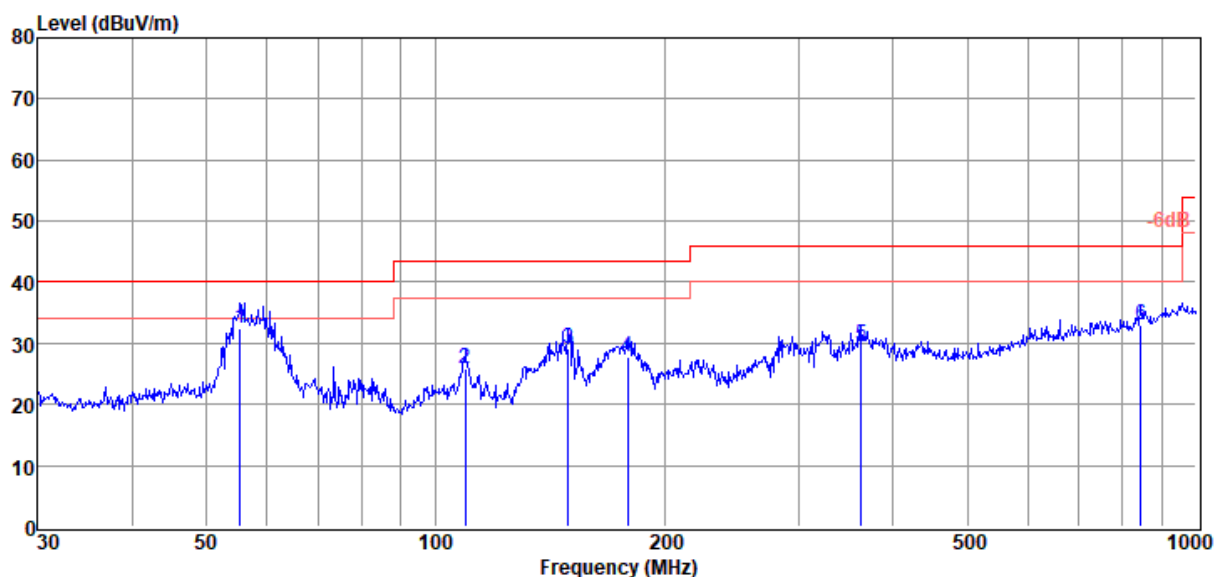

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	55.42	15.60	13.31	3.61	32.52	40.00	7.48	QP	HORIZONTAL
2	109.41	9.09	12.38	4.29	25.76	43.50	17.74	QP	HORIZONTAL
3	149.49	15.72	8.95	4.56	29.23	43.50	14.27	QP	HORIZONTAL
4	178.76	13.15	9.95	4.70	27.80	43.50	15.70	QP	HORIZONTAL
5	362.98	8.56	15.42	5.78	29.76	46.00	16.24	QP	HORIZONTAL
6	845.09	4.35	21.31	7.45	33.11	46.00	12.89	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Phone USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 24

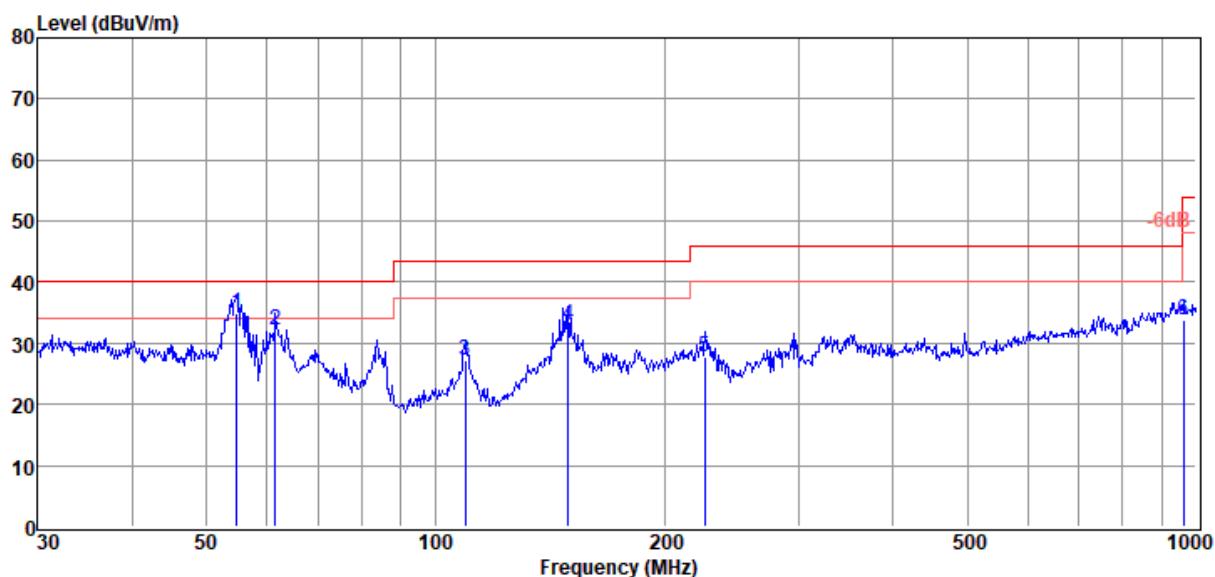

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	54.84	17.84	13.53	3.61	34.98	40.00	5.02	QP	VERTICAL
2	61.56	15.30	13.06	3.68	32.04	40.00	7.96	QP	VERTICAL
3	109.41	10.53	12.38	4.29	27.20	43.50	16.30	QP	VERTICAL
4	149.49	19.51	8.95	4.56	33.02	43.50	10.48	QP	VERTICAL
5	226.10	10.92	11.77	5.09	27.78	46.00	18.22	QP	VERTICAL
6	962.16	3.70	22.40	7.80	33.90	54.00	20.10	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Laptop USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 25

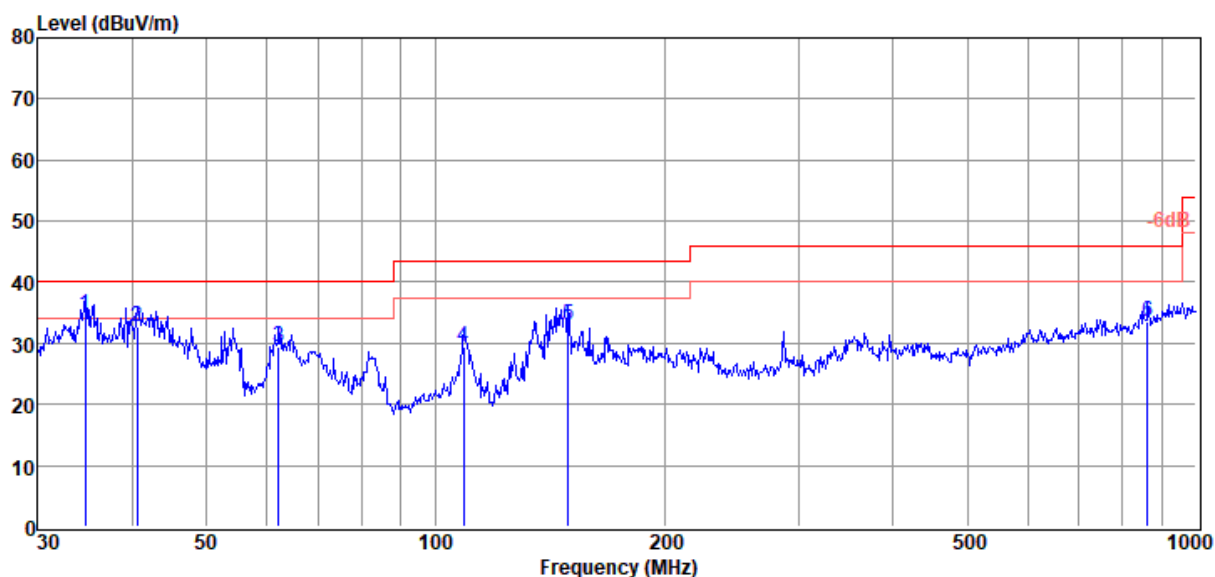

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.64	19.71	11.66	3.40	34.77	40.00	5.23	QP	VERTICAL
2	40.56	16.47	12.74	3.46	32.67	40.00	7.33	QP	VERTICAL
3	62.21	12.64	13.01	3.69	29.34	40.00	10.66	QP	VERTICAL
4	109.03	12.57	12.49	4.29	29.35	43.50	14.15	QP	VERTICAL
5	149.49	19.42	8.95	4.56	32.93	43.50	10.57	QP	VERTICAL
6	863.06	4.68	21.30	7.49	33.47	46.00	12.53	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Laptop USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 26

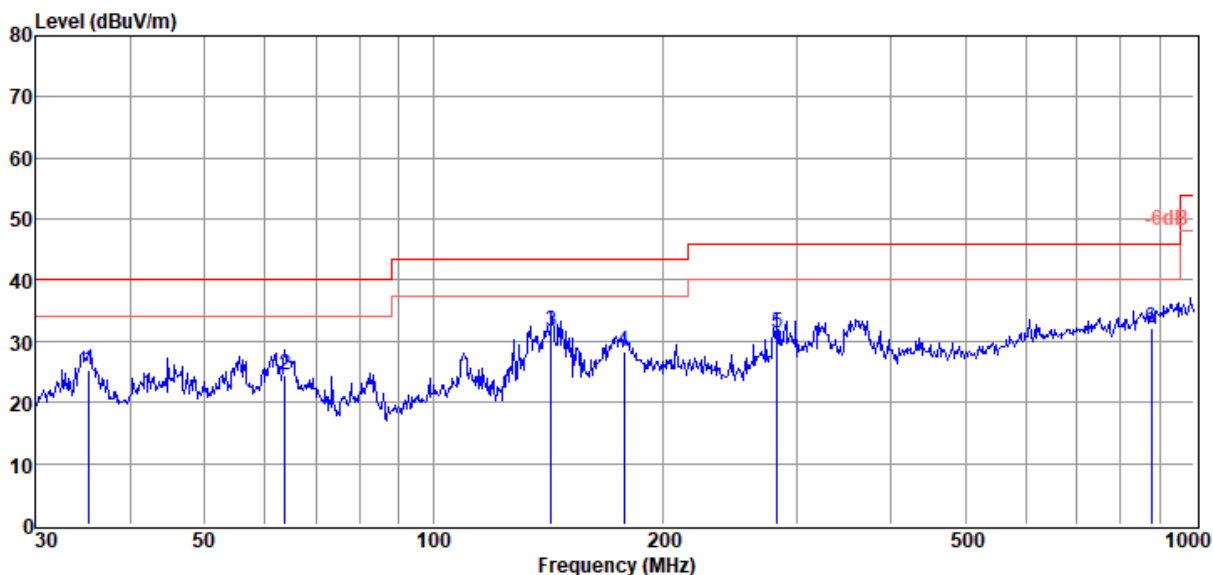

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	35.25	10.06	11.78	3.40	25.24	40.00	14.76	QP	HORIZONTAL
2	63.76	8.47	12.40	3.70	24.57	40.00	15.43	QP	HORIZONTAL
3	142.82	18.22	8.98	4.51	31.71	43.50	11.79	QP	HORIZONTAL
4	178.13	13.81	9.83	4.70	28.34	43.50	15.16	QP	HORIZONTAL
5	282.99	12.79	13.12	5.43	31.34	46.00	14.66	QP	HORIZONTAL
6	878.32	3.14	21.37	7.53	32.04	46.00	13.96	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Laptop USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 27

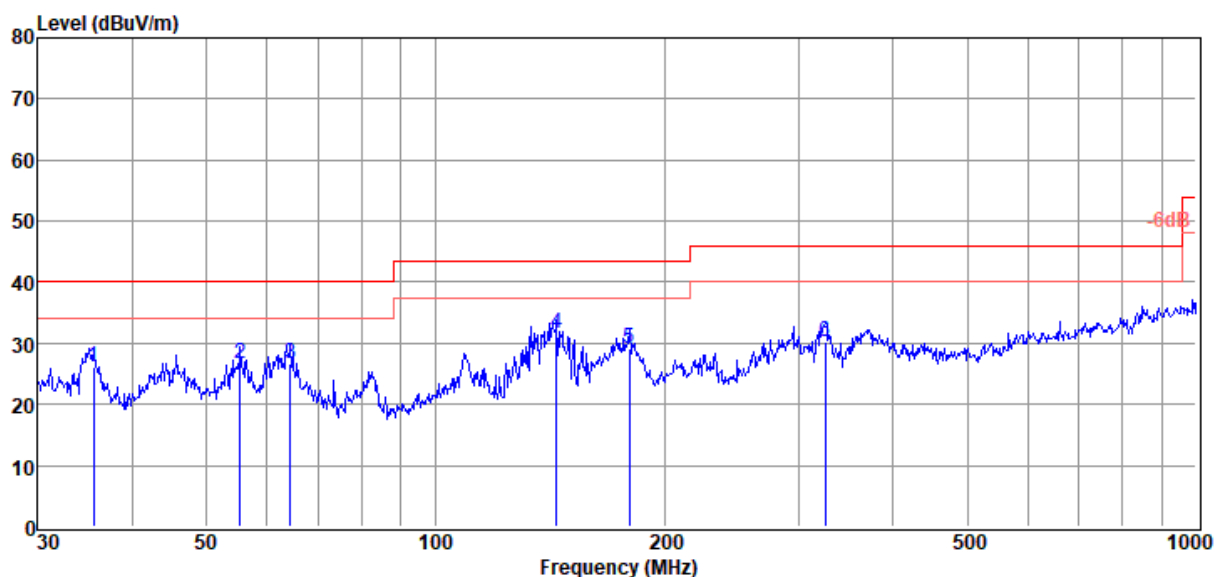

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	35.50	10.94	11.85	3.41	26.20	40.00	13.80	QP	HORIZONTAL
2	55.42	9.62	13.31	3.61	26.54	40.00	13.46	QP	HORIZONTAL
3	64.43	10.55	12.52	3.71	26.78	40.00	13.22	QP	HORIZONTAL
4	144.34	17.78	9.40	4.52	31.70	43.50	11.80	QP	HORIZONTAL
5	180.02	14.47	10.00	4.71	29.18	43.50	14.32	QP	HORIZONTAL
6	325.60	10.33	14.32	5.63	30.28	46.00	15.72	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Laptop USB Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 28

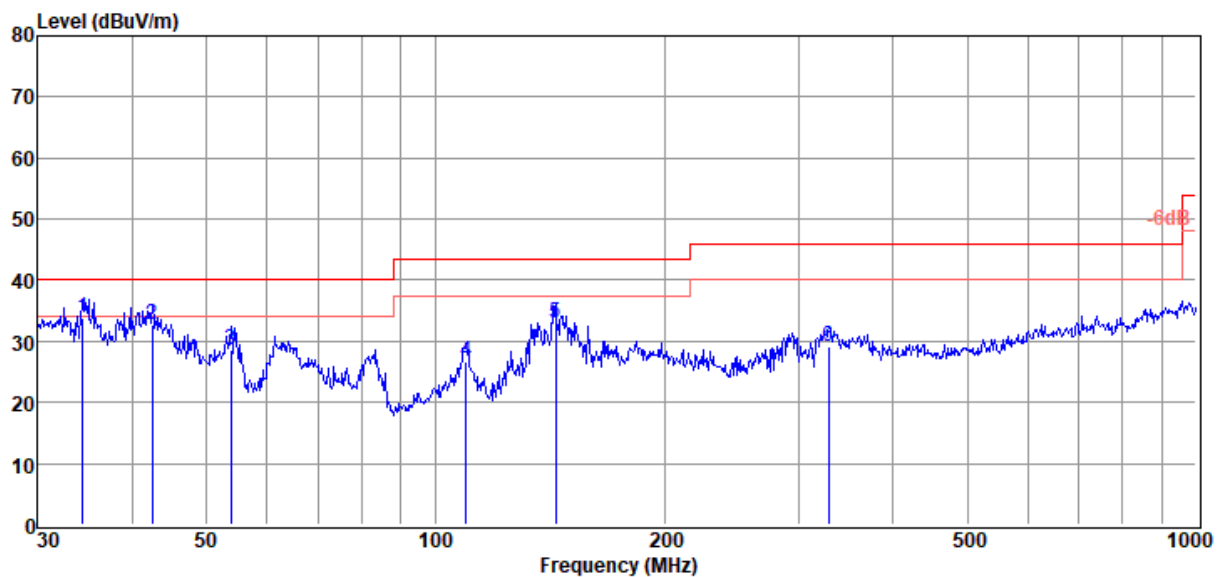

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.40	18.82	11.64	3.40	33.86	40.00	6.14	QP	VERTICAL
2	42.45	15.92	13.23	3.48	32.63	40.00	7.37	QP	VERTICAL
3	53.88	11.69	13.26	3.60	28.55	40.00	11.45	QP	VERTICAL
4	109.80	10.15	12.26	4.29	26.70	43.50	16.80	QP	VERTICAL
5	143.83	18.94	9.50	4.52	32.96	43.50	10.54	QP	VERTICAL
6	329.04	9.14	14.46	5.64	29.24	46.00	16.76	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Laptop USB Audio + Earphone
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 29

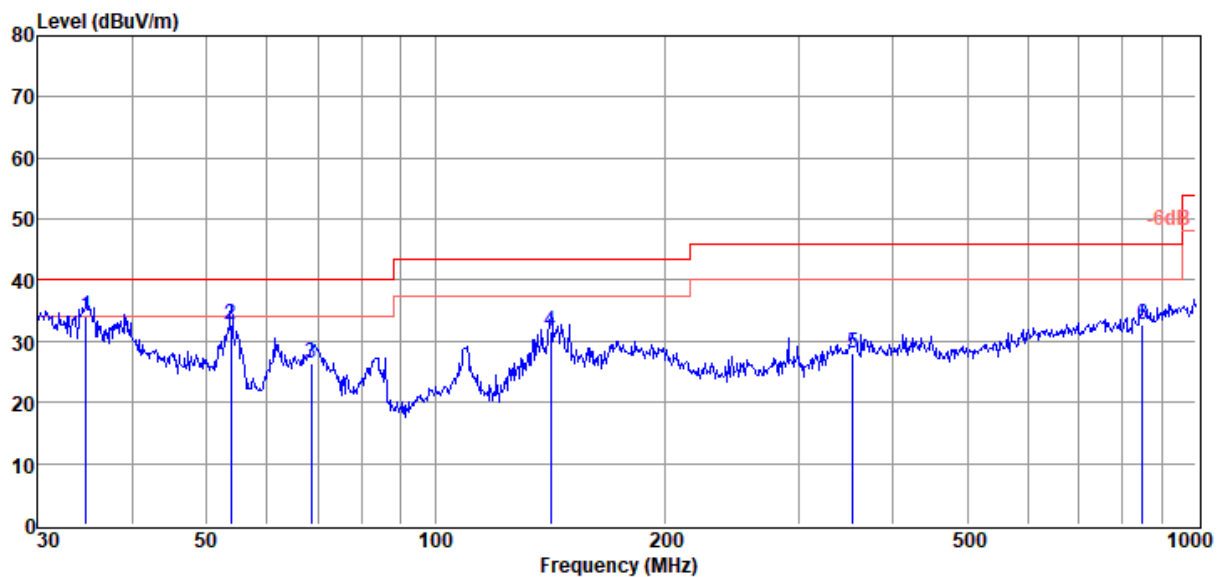

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.76	19.02	11.68	3.40	34.10	40.00	5.90	QP	VERTICAL
2	53.88	15.94	13.26	3.60	32.80	40.00	7.20	QP	VERTICAL
3	68.63	11.76	10.89	3.75	26.40	40.00	13.60	QP	VERTICAL
4	141.83	18.37	8.87	4.51	31.75	43.50	11.75	QP	VERTICAL
5	354.18	6.92	15.50	5.75	28.17	46.00	17.83	QP	VERTICAL
6	851.04	3.34	21.88	7.46	32.68	46.00	13.32	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Laptop USB Audio + Earphone
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 30

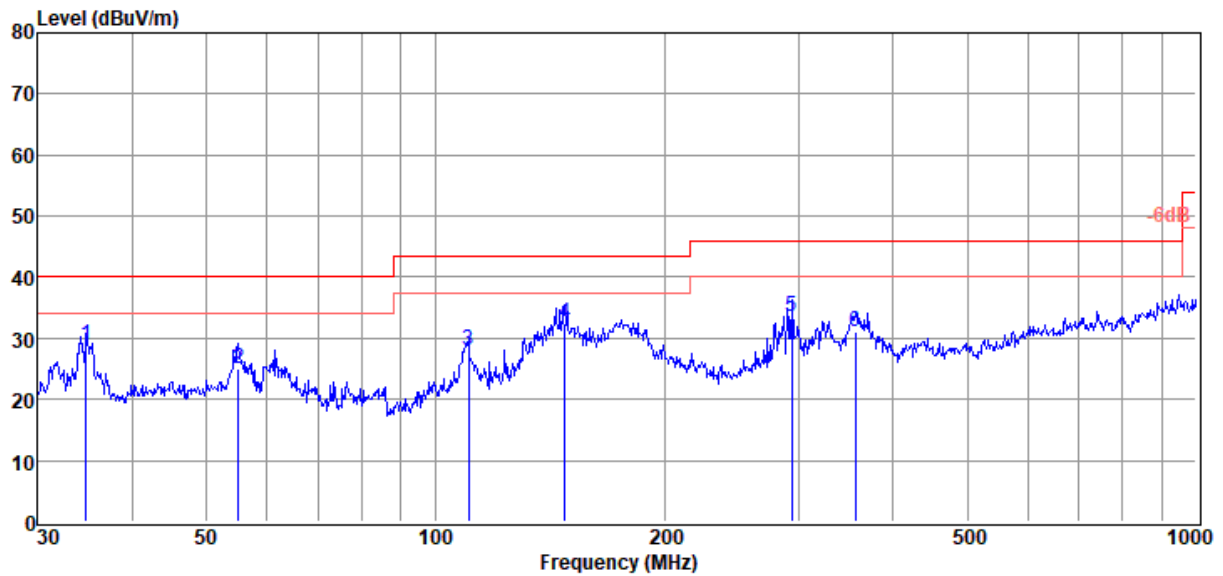

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.76	13.74	11.68	3.40	28.82	40.00	11.18	QP	HORIZONTAL
2	55.03	7.82	13.58	3.61	25.01	40.00	14.99	QP	HORIZONTAL
3	110.57	11.63	12.09	4.30	28.02	43.50	15.48	QP	HORIZONTAL
4	147.92	19.17	8.72	4.55	32.44	43.50	11.06	QP	HORIZONTAL
5	294.11	14.30	13.63	5.49	33.42	46.00	12.58	QP	HORIZONTAL
6	356.68	9.98	15.43	5.76	31.17	46.00	14.83	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20

Tested By : Antony Zeng

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Laptop USB Audio + Earphone
+ MIC*2 + Guitar mode

Condition : Temp:21.8°C, Humi:58.1%

Antenna/Distance : 2023 VULB 9163 #1/3m/HORIZONTAL

Memo : The first: FG4CELL21201

Data: 31

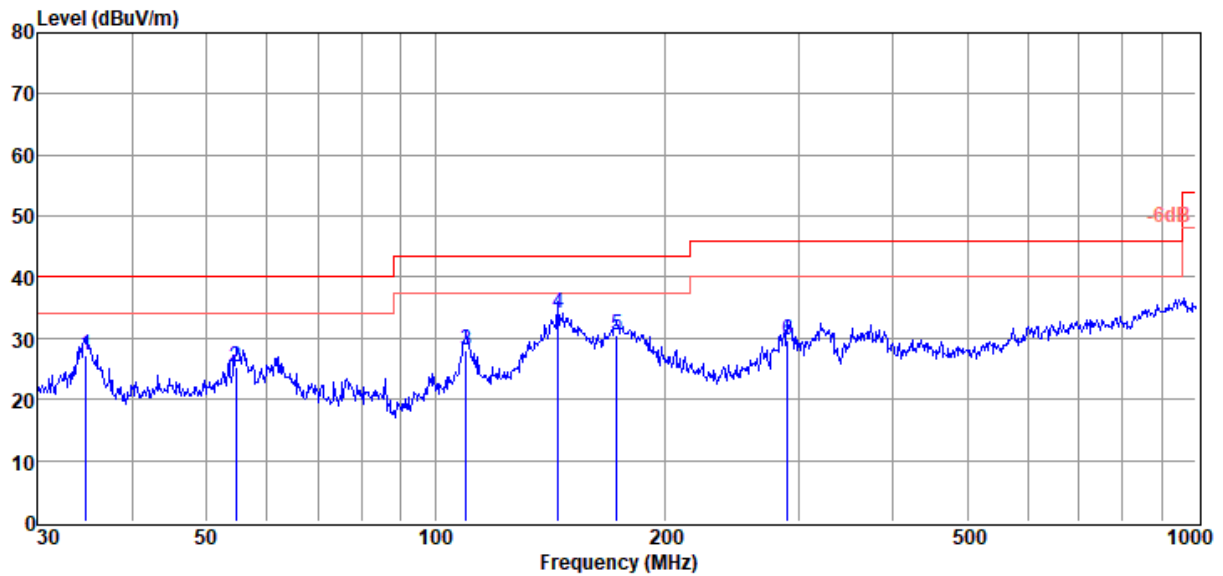

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.76	12.10	11.68	3.40	27.18	40.00	12.82	QP	HORIZONTAL
2	54.64	8.12	13.46	3.61	25.19	40.00	14.81	QP	HORIZONTAL
3	109.80	11.41	12.26	4.29	27.96	43.50	15.54	QP	HORIZONTAL
4	144.84	20.46	9.09	4.53	34.08	43.50	9.42	QP	HORIZONTAL
5	173.21	15.84	10.06	4.68	30.58	43.50	12.92	QP	HORIZONTAL
6	290.02	10.96	13.30	5.46	29.72	46.00	16.28	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Laptop USB Audio + Earphone
+ MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 32

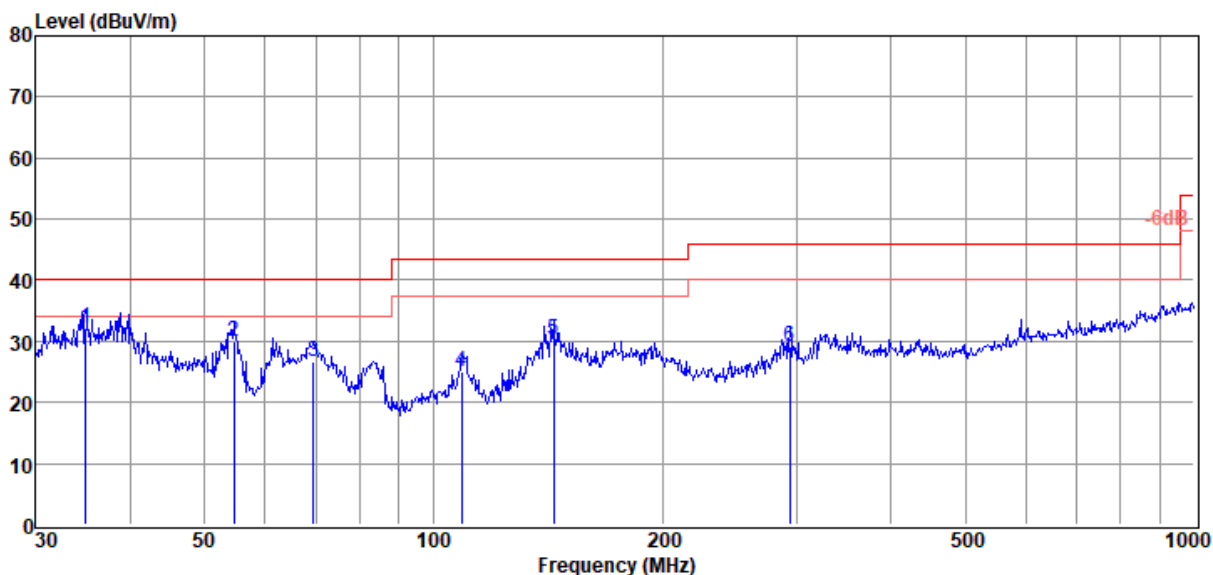

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.88	17.14	11.69	3.40	32.23	40.00	7.77	QP	VERTICAL
2	54.64	12.80	13.46	3.61	29.87	40.00	10.13	QP	VERTICAL
3	69.60	12.36	10.64	3.76	26.76	40.00	13.24	QP	VERTICAL
4	109.03	8.16	12.49	4.29	24.94	43.50	18.56	QP	VERTICAL
5	143.83	16.34	9.50	4.52	30.36	43.50	13.14	QP	VERTICAL
6	294.11	9.91	13.63	5.49	29.03	46.00	16.97	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + USB disk Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 33

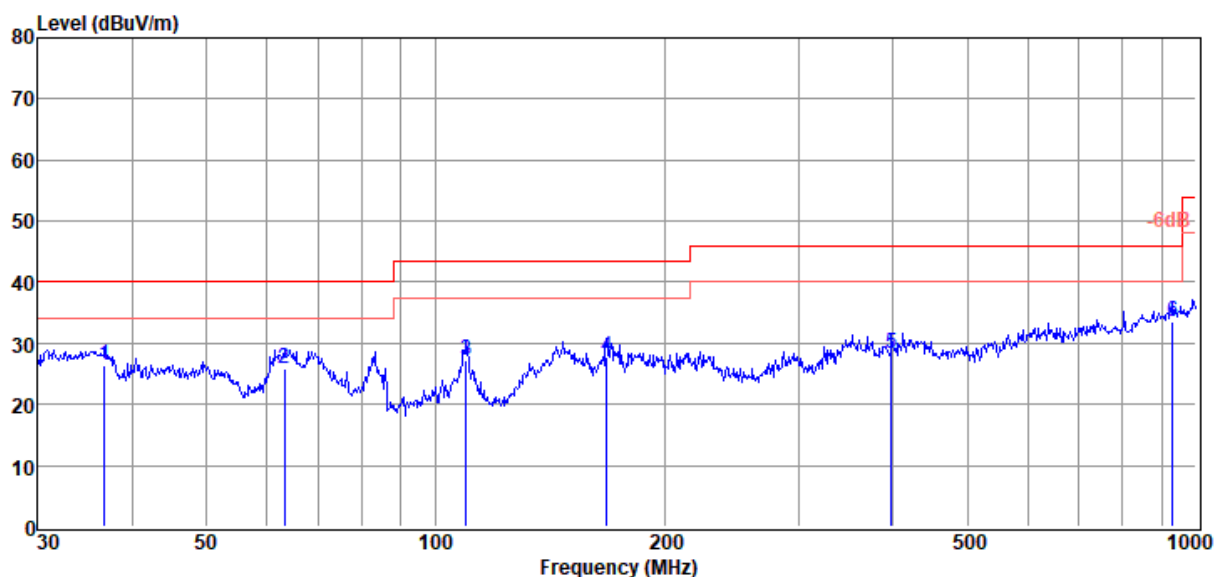

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.77	10.85	12.15	3.42	26.42	40.00	13.58	QP	VERTICAL
2	63.31	9.69	12.57	3.70	25.96	40.00	14.04	QP	VERTICAL
3	109.80	10.75	12.26	4.29	27.30	43.50	16.20	QP	VERTICAL
4	167.82	13.72	9.45	4.65	27.82	43.50	15.68	QP	VERTICAL
5	397.63	6.28	16.06	5.93	28.27	46.00	17.73	QP	VERTICAL
6	932.27	3.67	22.15	7.70	33.52	46.00	12.48	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + USB disk Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 34

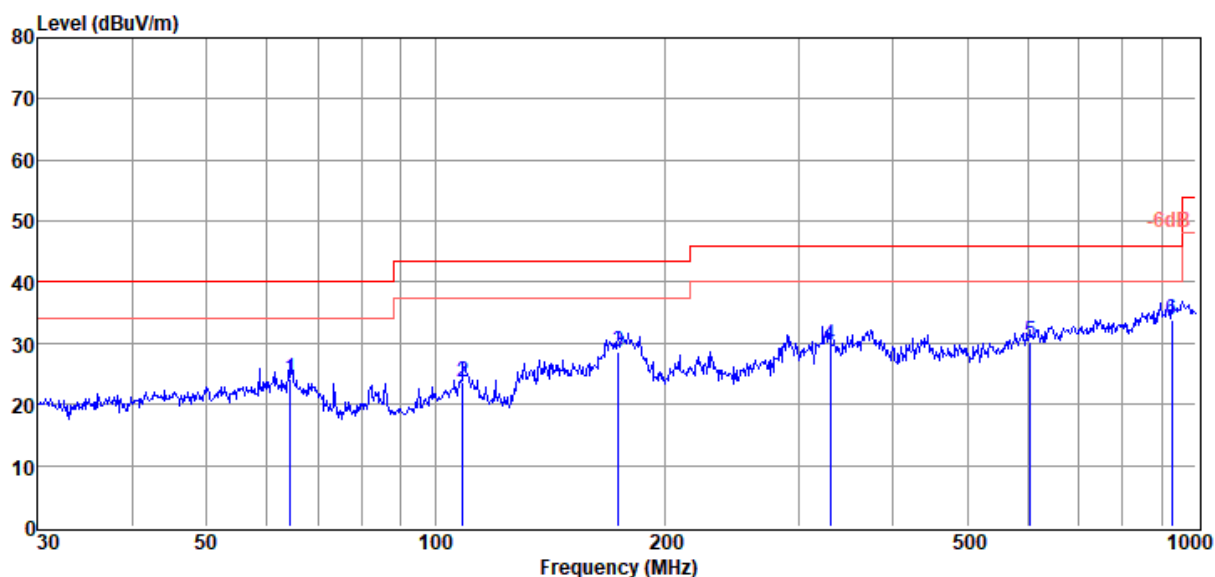

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.43	7.83	12.52	3.71	24.06	40.00	15.94	QP	HORIZONTAL
2	108.65	7.21	12.25	4.29	23.75	43.50	19.75	QP	HORIZONTAL
3	173.81	14.05	9.94	4.68	28.67	43.50	14.83	QP	HORIZONTAL
4	330.20	9.62	14.51	5.65	29.78	46.00	16.22	QP	HORIZONTAL
5	605.66	4.62	18.99	6.64	30.25	46.00	15.75	QP	HORIZONTAL
6	929.01	4.11	22.14	7.69	33.94	46.00	12.06	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + USB disk Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 35

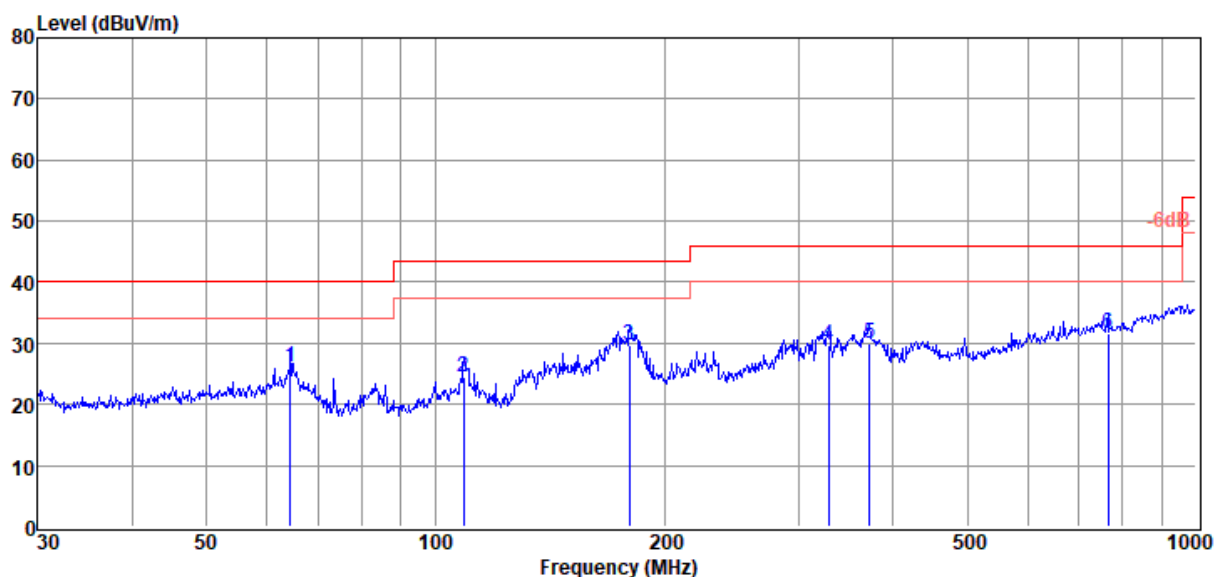

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.43	9.81	12.52	3.71	26.04	40.00	13.96	QP	HORIZONTAL
2	109.03	7.60	12.49	4.29	24.38	43.50	19.12	QP	HORIZONTAL
3	180.02	14.89	10.00	4.71	29.60	43.50	13.90	QP	HORIZONTAL
4	329.04	9.47	14.46	5.64	29.57	46.00	16.43	QP	HORIZONTAL
5	372.00	8.30	15.96	5.82	30.08	46.00	15.92	QP	HORIZONTAL
6	766.06	4.49	19.88	7.18	31.55	46.00	14.45	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + USB disk Audio + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 36

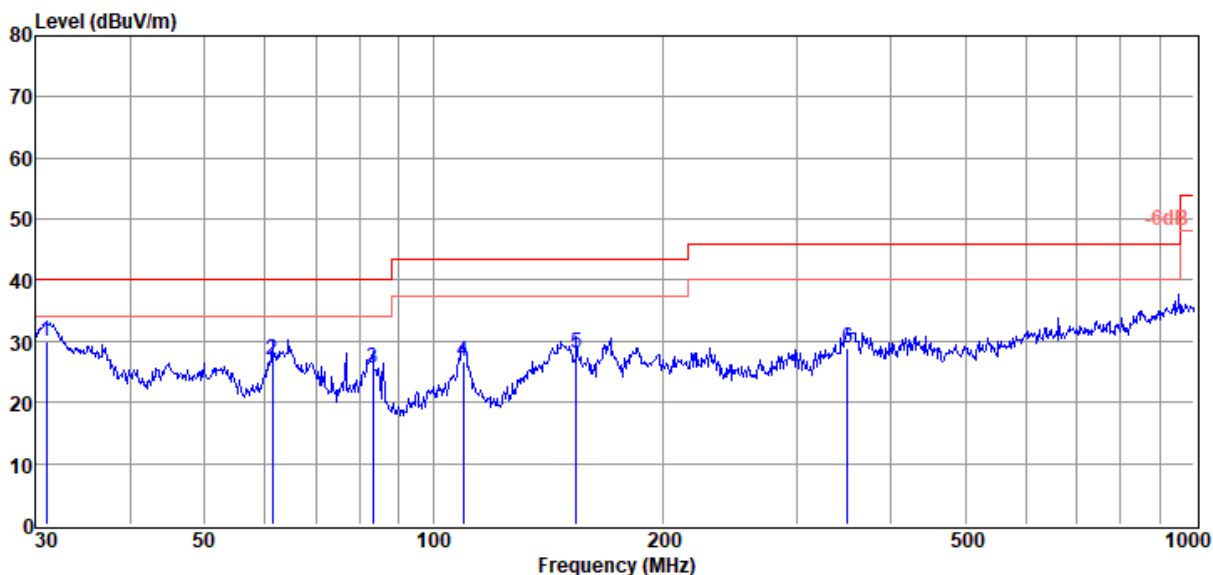

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	30.96	15.77	10.90	3.36	30.03	40.00	9.97	QP	VERTICAL
2	61.35	10.34	13.03	3.68	27.05	40.00	12.95	QP	VERTICAL
3	83.23	11.93	9.59	3.93	25.45	40.00	14.55	QP	VERTICAL
4	109.41	10.07	12.38	4.29	26.74	43.50	16.76	QP	VERTICAL
5	154.28	14.28	9.06	4.58	27.92	43.50	15.58	QP	VERTICAL
6	350.48	7.70	15.50	5.73	28.93	46.00	17.07	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + 5V/3A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 37

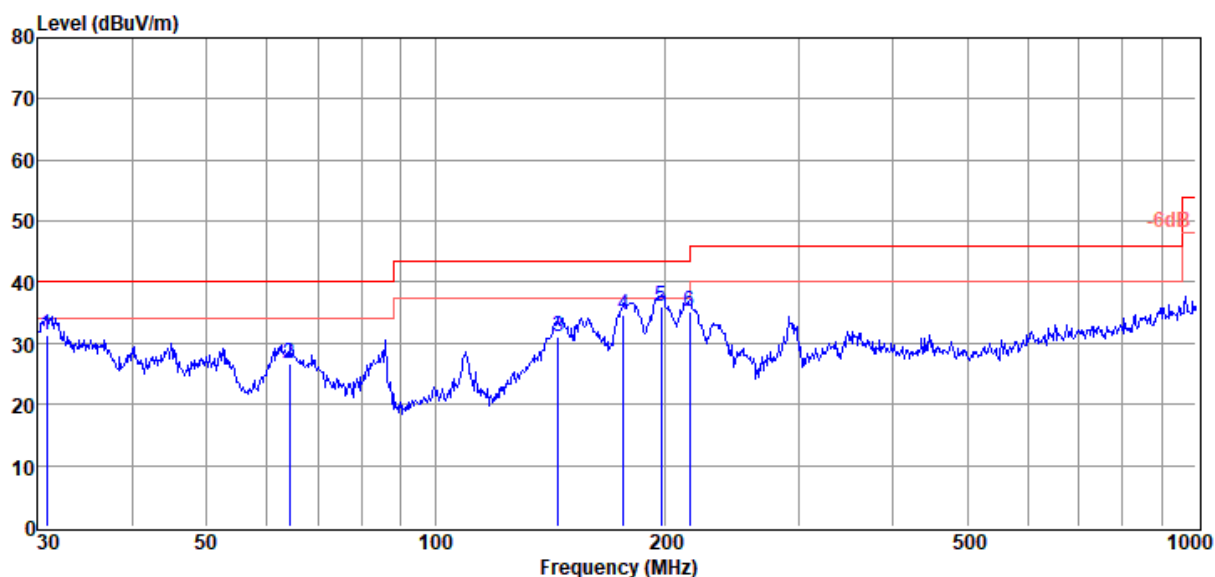

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.85	17.11	10.91	3.36	31.38	40.00	8.62	QP	VERTICAL
2	64.21	10.61	12.40	3.71	26.72	40.00	13.28	QP	VERTICAL
3	144.84	17.49	9.09	4.53	31.11	43.50	12.39	QP	VERTICAL
4	176.89	19.91	10.08	4.69	34.68	43.50	8.82	QP	VERTICAL
5	197.89	19.92	11.27	4.80	35.99	43.50	7.51	QP	VERTICAL
6	216.02	19.00	11.14	4.98	35.12	46.00	10.88	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + 5V/3A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 38

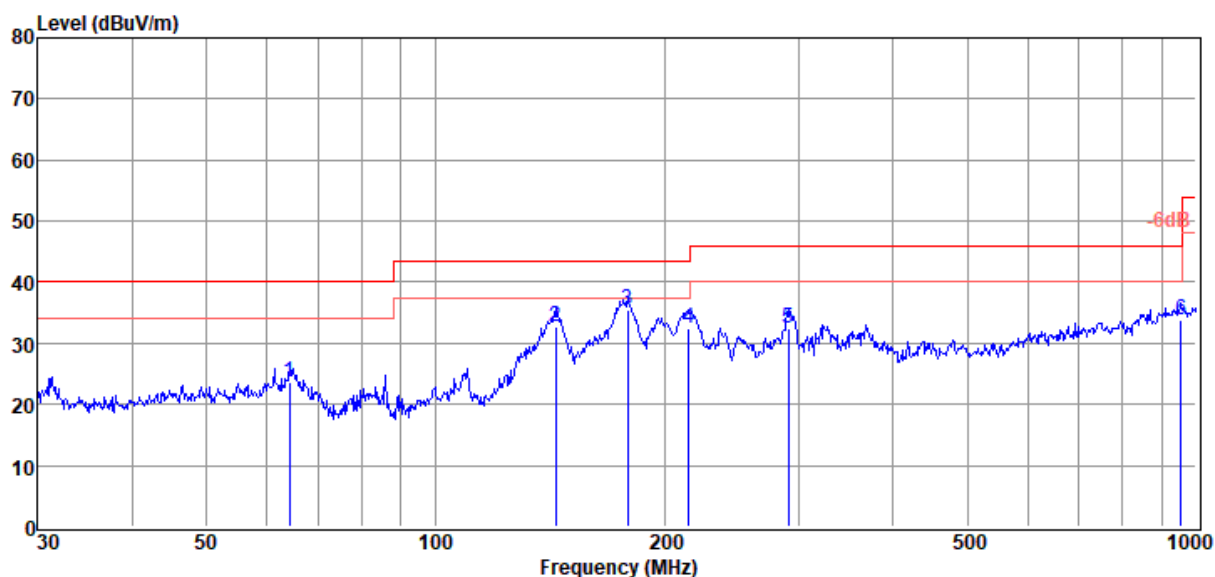

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.21	7.60	12.40	3.71	23.71	40.00	16.29	QP	HORIZONTAL
2	143.83	18.79	9.50	4.52	32.81	43.50	10.69	QP	HORIZONTAL
3	178.76	20.90	9.95	4.70	35.55	43.50	7.95	QP	HORIZONTAL
4	215.27	16.48	11.11	4.97	32.56	43.50	10.94	QP	HORIZONTAL
5	291.04	13.52	13.38	5.47	32.37	46.00	13.63	QP	HORIZONTAL
6	955.44	3.61	22.31	7.78	33.70	46.00	12.30	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + 5V/3A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 39

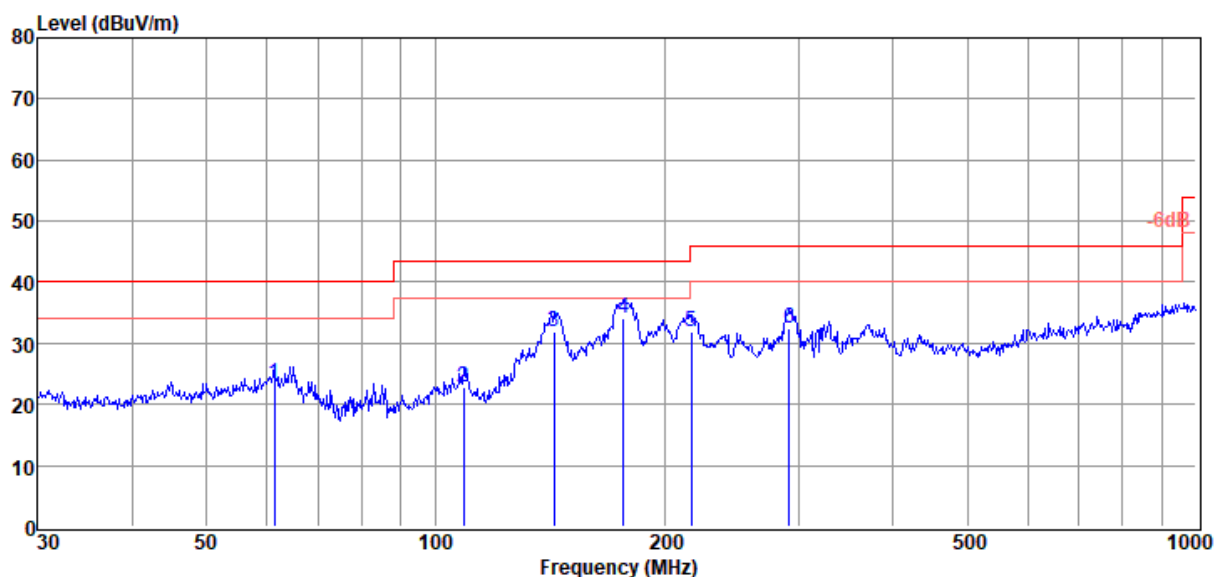

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	61.35	6.66	13.03	3.68	23.37	40.00	16.63	QP	HORIZONTAL
2	109.03	6.16	12.49	4.29	22.94	43.50	20.56	QP	HORIZONTAL
3	143.33	18.23	9.20	4.52	31.95	43.50	11.55	QP	HORIZONTAL
4	176.89	19.40	10.08	4.69	34.17	43.50	9.33	QP	HORIZONTAL
5	216.78	15.60	11.17	4.99	31.76	46.00	14.24	QP	HORIZONTAL
6	292.06	13.49	13.46	5.48	32.43	46.00	13.57	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + 5V/3A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 40

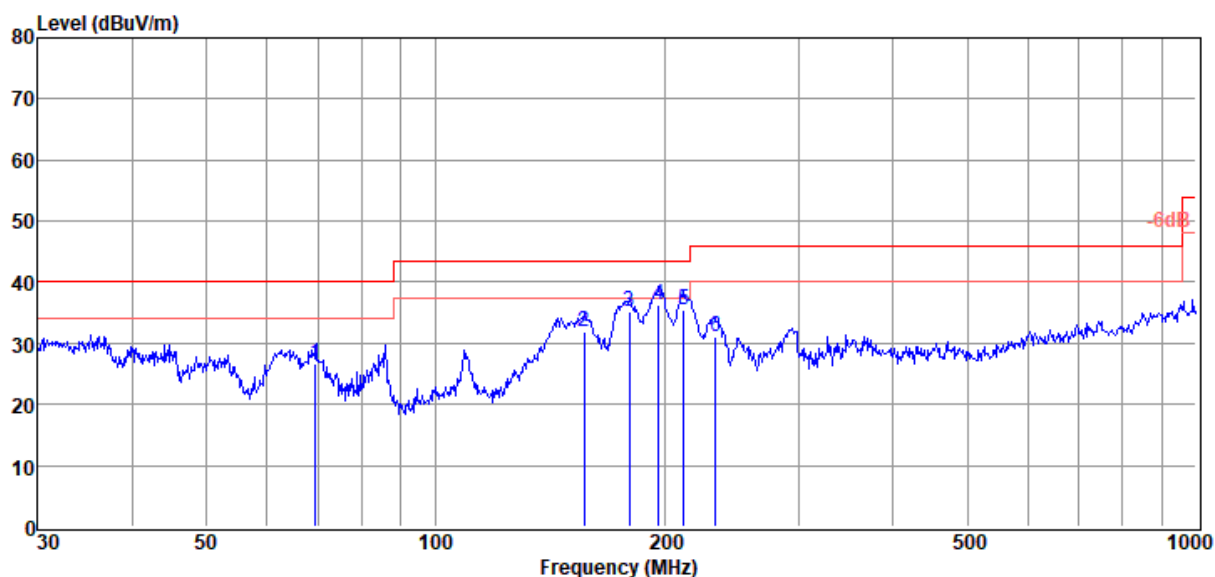

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	69.60	12.16	10.64	3.76	26.56	40.00	13.44	QP	VERTICAL
2	157.01	18.35	9.00	4.60	31.95	43.50	11.55	QP	VERTICAL
3	180.02	20.53	10.00	4.71	35.24	43.50	8.26	QP	VERTICAL
4	196.51	20.42	11.00	4.79	36.21	43.50	7.29	QP	VERTICAL
5	212.27	19.49	10.99	4.94	35.42	43.50	8.08	QP	VERTICAL
6	233.35	14.05	11.87	5.15	31.07	46.00	14.93	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Aux in + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 41

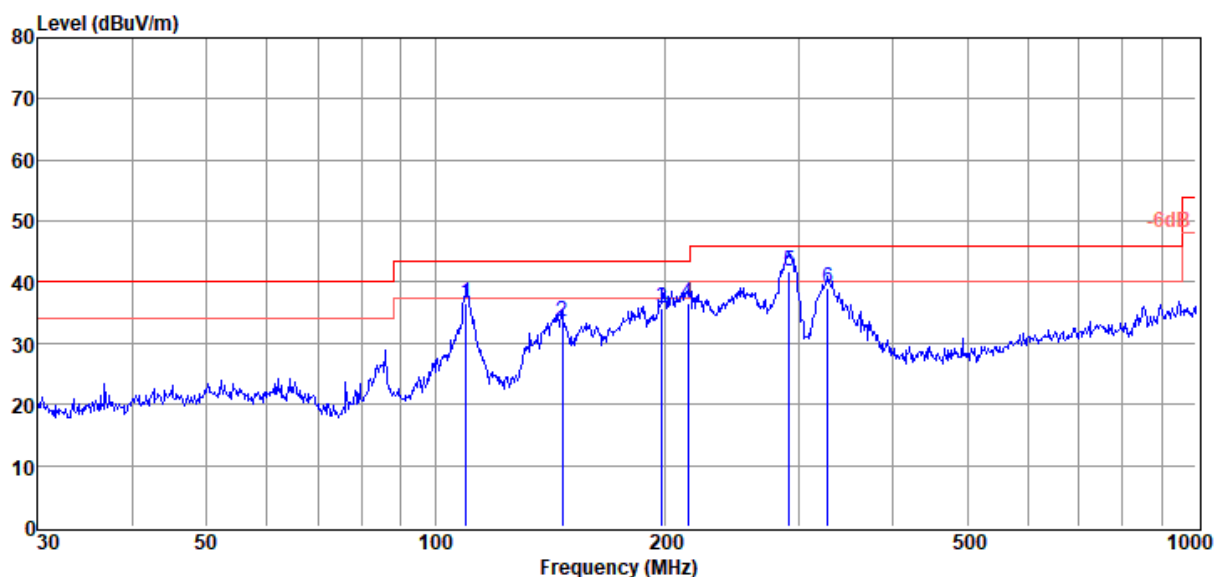

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	109.80	20.08	12.26	4.29	36.63	43.50	6.87	QP	VERTICAL
2	146.89	19.95	8.98	4.54	33.47	43.50	10.03	QP	VERTICAL
3	198.59	19.47	11.36	4.80	35.63	43.50	7.87	QP	VERTICAL
4	214.51	20.63	11.08	4.96	36.67	43.50	6.83	QP	VERTICAL
5	292.06	22.79	13.46	5.48	41.73	46.00	4.27	QP	VERTICAL
6	327.89	18.91	14.42	5.64	38.97	46.00	7.03	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Aux in + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 42

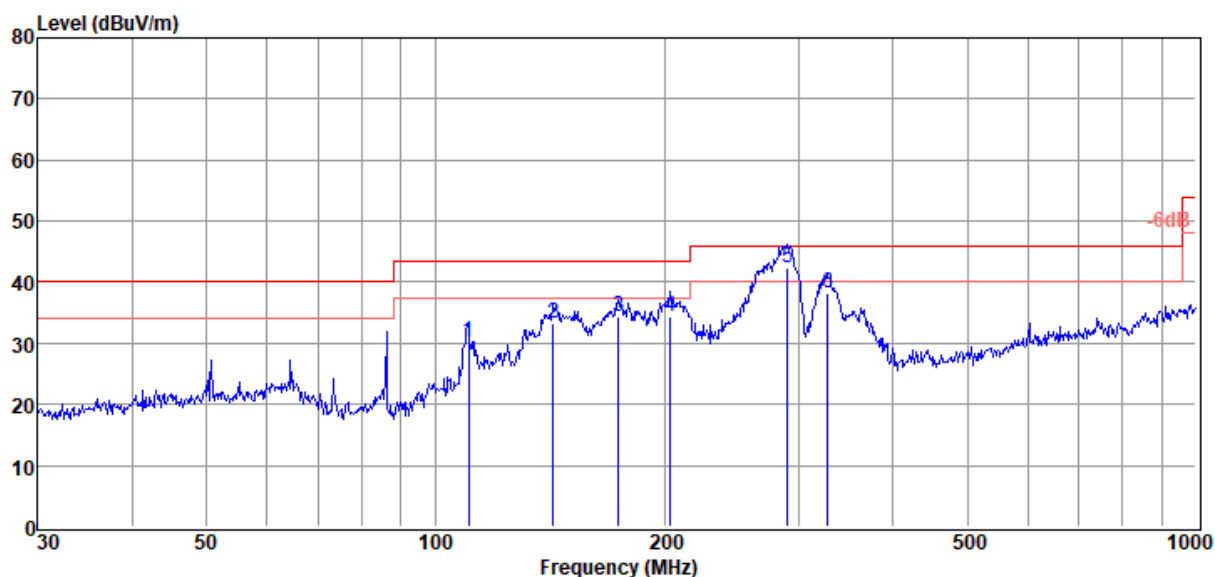

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	110.57	13.87	12.09	4.30	30.26	43.50	13.24	QP	HORIZONTAL
2	142.82	19.81	8.98	4.51	33.30	43.50	10.20	QP	HORIZONTAL
3	173.81	19.61	9.94	4.68	34.23	43.50	9.27	QP	HORIZONTAL
4	203.52	18.55	10.96	4.85	34.36	43.50	9.14	QP	HORIZONTAL
5	290.02	23.51	13.30	5.46	42.27	46.00	3.73	QP	HORIZONTAL
6	327.89	18.14	14.42	5.64	38.20	46.00	7.80	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Bluetooth + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 43

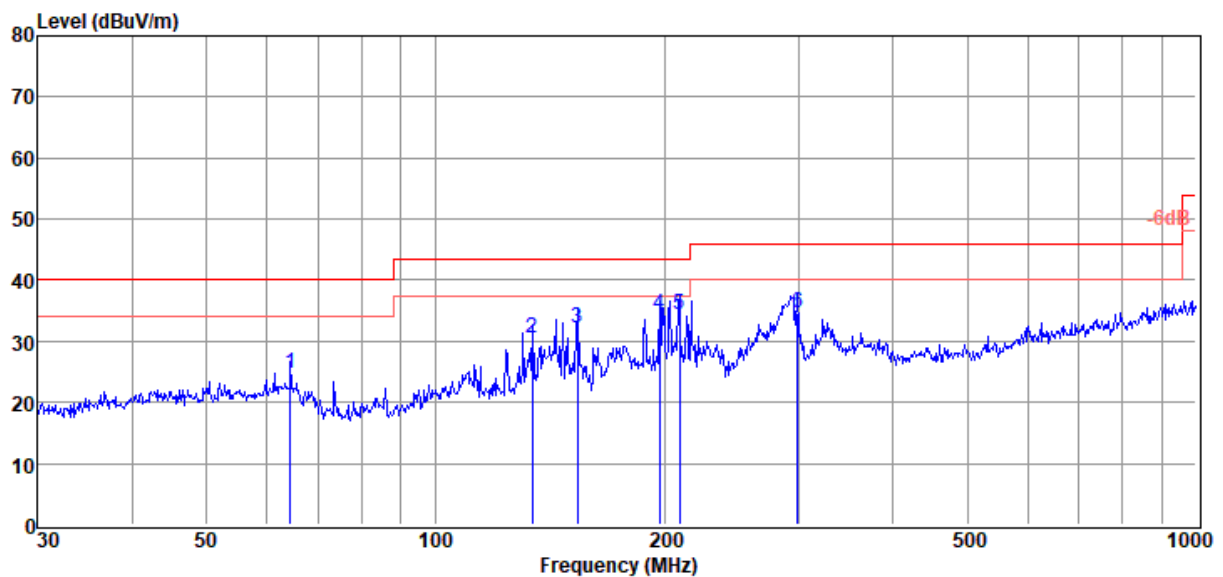

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	64.43	8.43	12.52	3.71	24.66	40.00	15.34	QP	HORIZONTAL
2	134.09	17.19	8.98	4.45	30.62	43.50	12.88	QP	HORIZONTAL
3	153.74	18.67	8.87	4.58	32.12	43.50	11.38	QP	HORIZONTAL
4	197.20	18.61	11.06	4.80	34.47	43.50	9.03	QP	HORIZONTAL
5	209.31	18.48	10.90	4.91	34.29	43.50	9.21	QP	HORIZONTAL
6	299.32	15.48	13.70	5.52	34.70	46.00	11.30	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Bluetooth + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 44

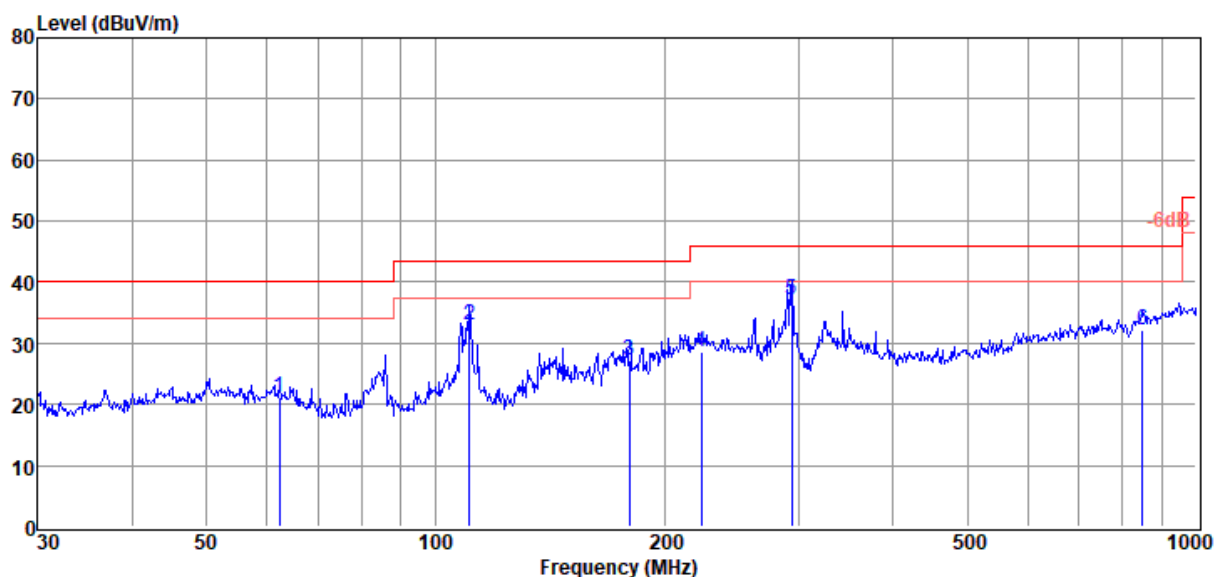

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	62.43	4.45	12.93	3.69	21.07	40.00	18.93	QP	VERTICAL
2	110.96	16.60	12.01	4.30	32.91	43.50	10.59	QP	VERTICAL
3	180.02	12.58	10.00	4.71	27.29	43.50	16.21	QP	VERTICAL
4	223.73	11.89	11.60	5.06	28.55	46.00	17.45	QP	VERTICAL
5	294.11	17.93	13.63	5.49	37.05	46.00	8.95	QP	VERTICAL
6	851.04	2.85	21.88	7.46	32.19	46.00	13.81	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20

Tested By : Antony Zeng

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Bluetooth + TWS + 5V/1A load + MIC*2 +
Guitar mode

Condition : Temp:21.8°C, Humi:58.1%

Antenna/Distance : 2023 VULB 9163 #1/3m/VERTICAL

Memo : The first: FG4CELL21201

Data: 45

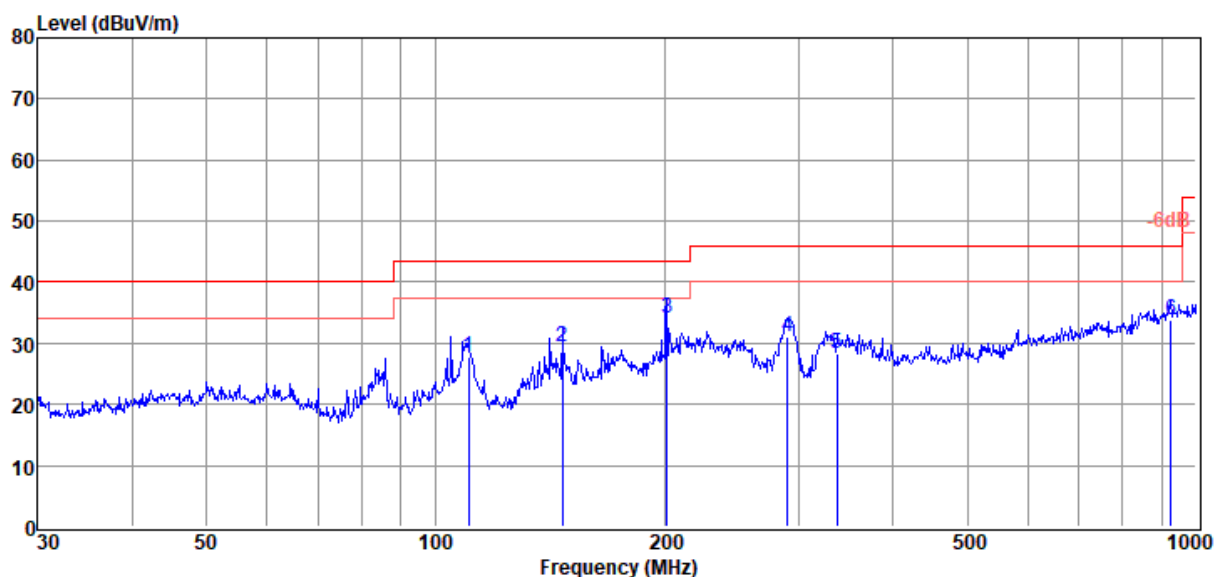

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	110.57	11.45	12.09	4.30	27.84	43.50	15.66	QP	VERTICAL
2	146.89	16.01	8.98	4.54	29.53	43.50	13.97	QP	VERTICAL
3	201.39	18.32	11.04	4.82	34.18	43.50	9.32	QP	VERTICAL
4	290.02	12.36	13.30	5.46	31.12	46.00	14.88	QP	VERTICAL
5	337.22	7.87	14.88	5.68	28.43	46.00	17.57	QP	VERTICAL
6	925.76	4.15	21.95	7.68	33.78	46.00	12.22	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Bluetooth + TWS + 5V/1A load + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 46

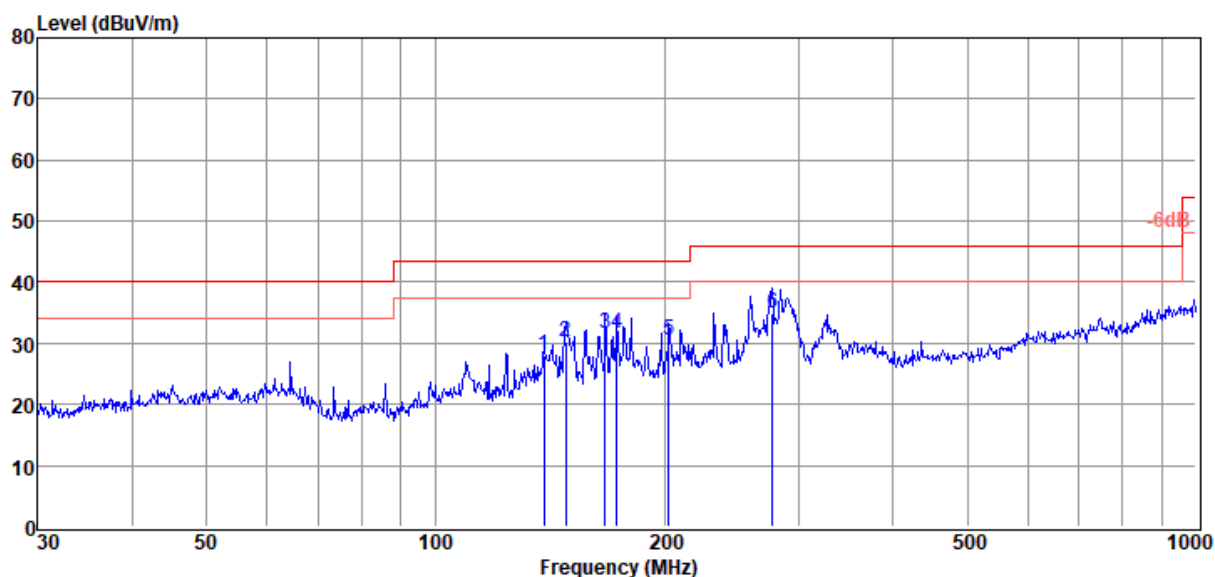

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	138.87	14.84	8.65	4.49	27.98	43.50	15.52	QP	HORIZONTAL
2	148.44	16.97	8.74	4.55	30.26	43.50	13.24	QP	HORIZONTAL
3	167.24	17.40	9.63	4.65	31.68	43.50	11.82	QP	HORIZONTAL
4	173.21	16.74	10.06	4.68	31.48	43.50	12.02	QP	HORIZONTAL
5	202.81	14.57	10.99	4.84	30.40	43.50	13.10	QP	HORIZONTAL
6	277.09	16.48	13.06	5.39	34.93	46.00	11.07	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Phone USB Audio + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 47

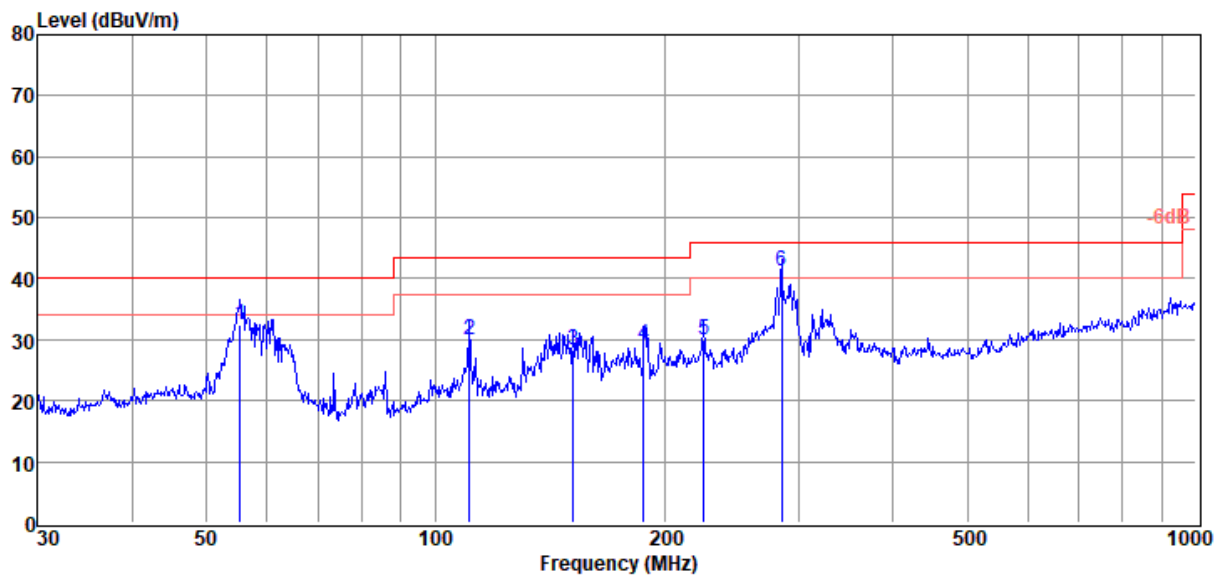

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	55.42	15.59	13.31	3.61	32.51	40.00	7.49	QP	HORIZONTAL
2	110.96	13.58	12.01	4.30	29.89	43.50	13.61	QP	HORIZONTAL
3	151.60	14.61	9.06	4.57	28.24	43.50	15.26	QP	HORIZONTAL
4	187.75	14.24	10.18	4.75	29.17	43.50	14.33	QP	HORIZONTAL
5	225.31	13.23	11.72	5.08	30.03	46.00	15.97	QP	HORIZONTAL
6	284.98	22.60	13.20	5.44	41.24	46.00	4.76	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Phone USB Audio + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 48

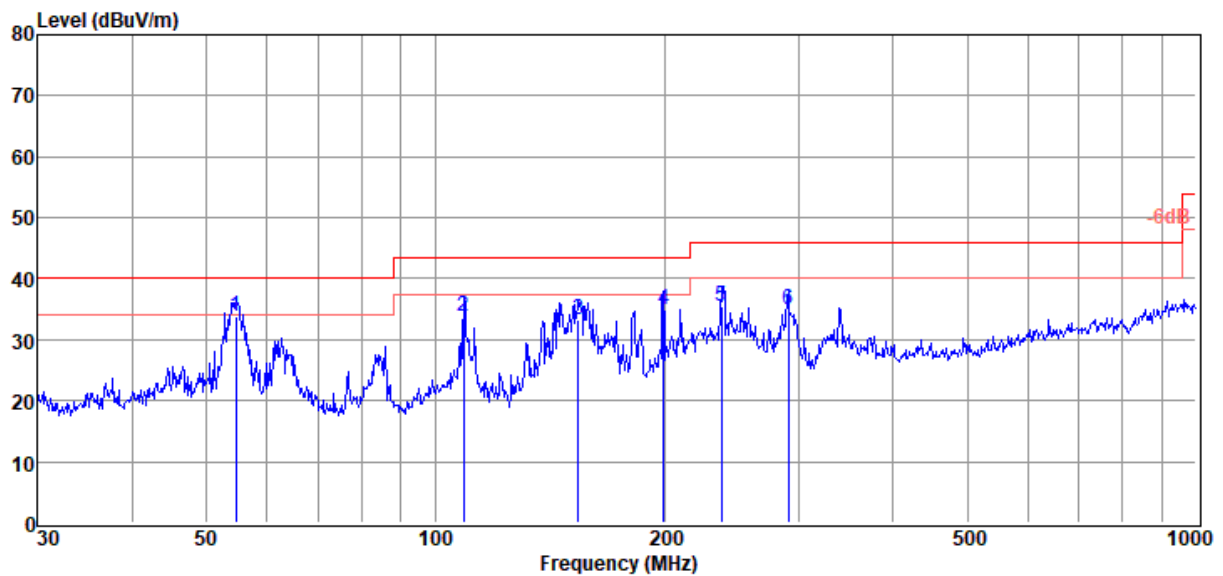

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	54.64	16.68	13.46	3.61	33.75	40.00	6.25	QP	VERTICAL
2	109.03	17.07	12.49	4.29	33.85	43.50	9.65	QP	VERTICAL
3	154.28	19.52	9.06	4.58	33.16	43.50	10.34	QP	VERTICAL
4	199.29	18.81	11.31	4.81	34.93	43.50	8.57	QP	VERTICAL
5	237.48	18.38	12.00	5.17	35.55	46.00	10.45	QP	VERTICAL
6	291.04	16.06	13.38	5.47	34.91	46.00	11.09	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Laptop USB Audio + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 49

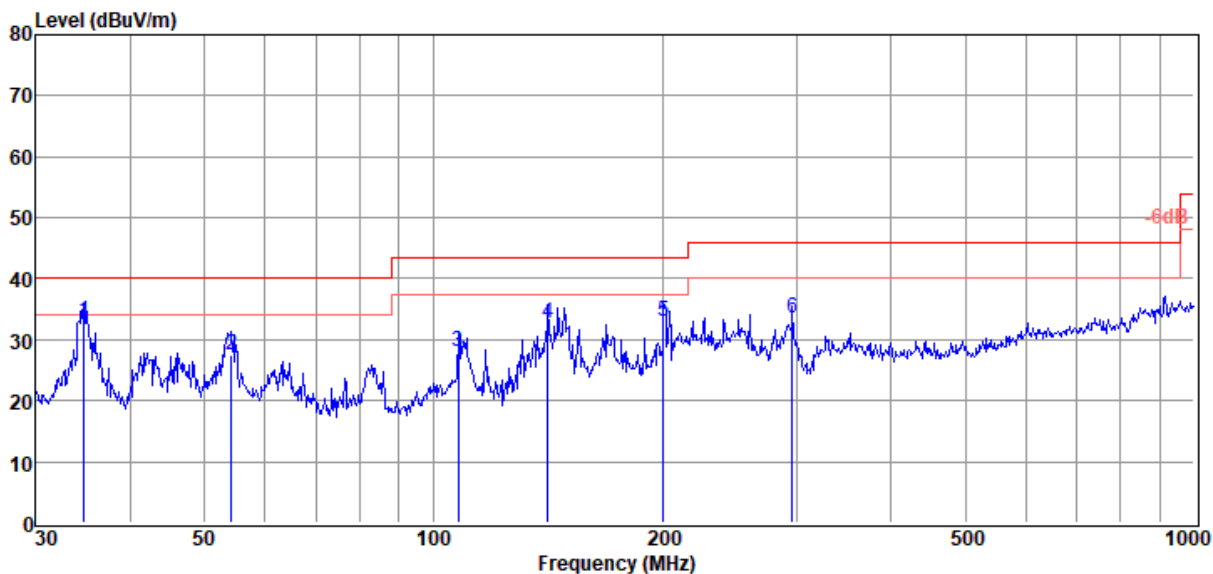

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	34.76	17.80	11.68	3.40	32.88	40.00	7.12	QP	VERTICAL
2	54.26	10.48	13.30	3.60	27.38	40.00	12.62	QP	VERTICAL
3	107.89	11.93	11.82	4.28	28.03	43.50	15.47	QP	VERTICAL
4	141.33	19.43	8.77	4.50	32.70	43.50	10.80	QP	VERTICAL
5	200.69	17.01	11.07	4.82	32.90	43.50	10.60	QP	VERTICAL
6	296.18	14.25	13.70	5.50	33.45	46.00	12.55	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Laptop USB Audio + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 50

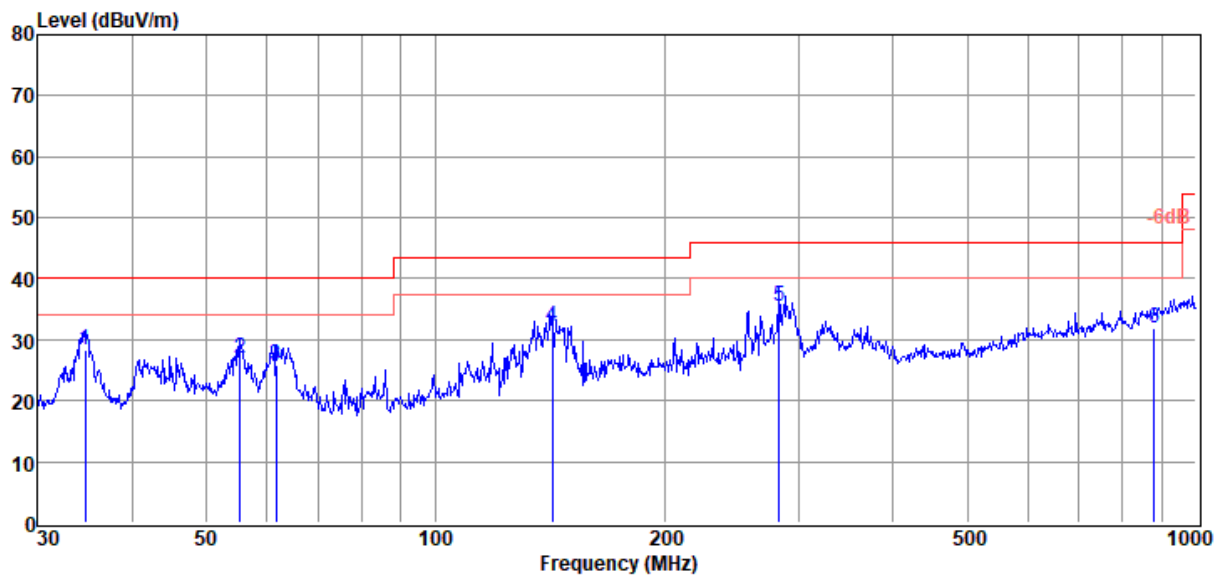

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	34.64	13.27	11.66	3.40	28.33	40.00	11.67	QP	HORIZONTAL
2	55.42	10.07	13.31	3.61	26.99	40.00	13.01	QP	HORIZONTAL
3	61.78	9.11	13.08	3.68	25.87	40.00	14.13	QP	HORIZONTAL
4	142.32	18.74	8.93	4.51	32.18	43.50	11.32	QP	HORIZONTAL
5	282.99	16.84	13.12	5.43	35.39	46.00	10.61	QP	HORIZONTAL
6	881.41	3.13	21.33	7.54	32.00	46.00	14.00	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : USB disk Audio + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 51

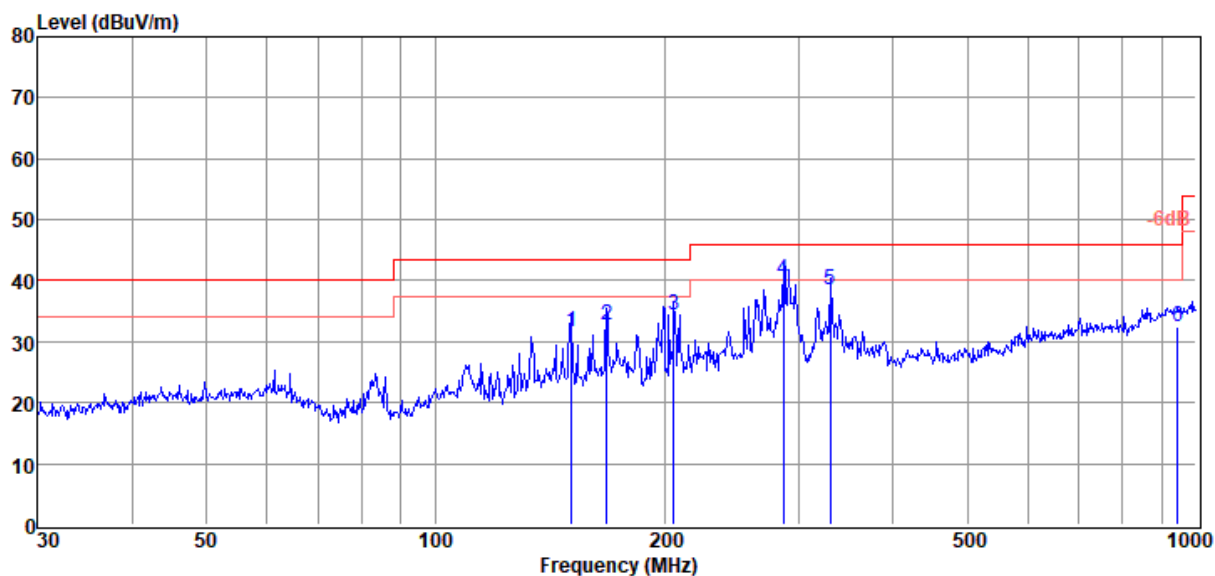

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	151.07	17.84	9.27	4.57	31.68	43.50	11.82	QP	HORIZONTAL
2	167.82	18.48	9.45	4.65	32.58	43.50	10.92	QP	HORIZONTAL
3	205.68	18.68	10.90	4.87	34.45	43.50	9.05	QP	HORIZONTAL
4	286.98	21.57	13.24	5.45	40.26	46.00	5.74	QP	HORIZONTAL
5	330.20	18.36	14.51	5.65	38.52	46.00	7.48	QP	HORIZONTAL
6	945.44	2.71	21.96	7.74	32.41	46.00	13.59	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : USB disk Audio + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 52

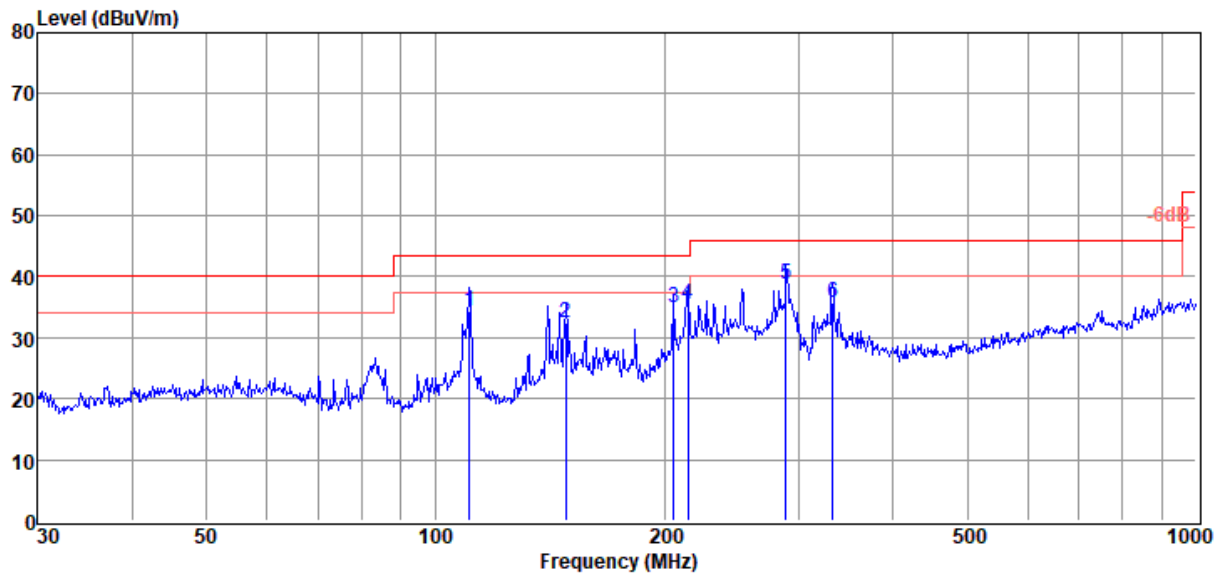

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	110.96	17.95	12.01	4.30	34.26	43.50	9.24	QP	VERTICAL
2	148.44	19.17	8.74	4.55	32.46	43.50	11.04	QP	VERTICAL
3	205.68	19.05	10.90	4.87	34.82	43.50	8.68	QP	VERTICAL
4	214.51	19.49	11.08	4.96	35.53	43.50	7.97	QP	VERTICAL
5	289.00	19.97	13.28	5.46	38.71	46.00	7.29	QP	VERTICAL
6	332.52	15.57	14.60	5.66	35.83	46.00	10.17	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 53

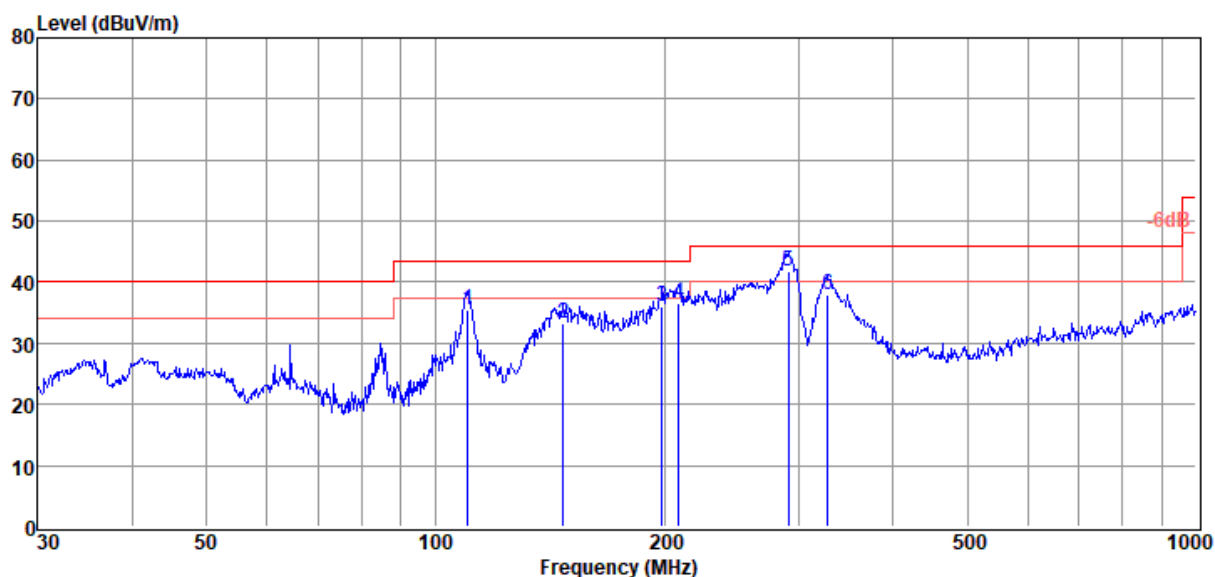

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	110.18	18.98	12.16	4.30	35.44	43.50	8.06	QP	VERTICAL
2	147.40	19.88	8.88	4.54	33.30	43.50	10.20	QP	VERTICAL
3	198.59	19.88	11.36	4.80	36.04	43.50	7.46	QP	VERTICAL
4	208.58	20.89	10.90	4.90	36.69	43.50	6.81	QP	VERTICAL
5	291.04	23.07	13.38	5.47	41.92	46.00	4.08	QP	VERTICAL
6	327.89	17.94	14.42	5.64	38.00	46.00	8.00	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 54

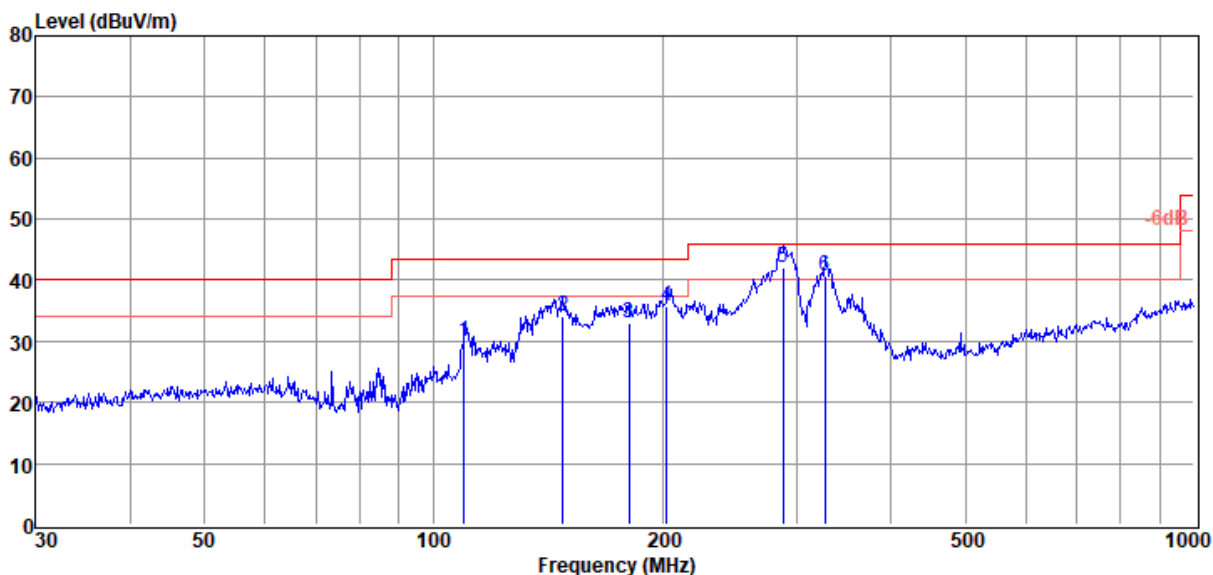

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	109.80	13.43	12.26	4.29	29.98	43.50	13.52	QP	HORIZONTAL
2	147.92	20.84	8.72	4.55	34.11	43.50	9.39	QP	HORIZONTAL
3	180.65	18.46	9.94	4.71	33.11	43.50	10.39	QP	HORIZONTAL
4	202.81	19.93	10.99	4.84	35.76	43.50	7.74	QP	HORIZONTAL
5	287.99	23.40	13.26	5.45	42.11	46.00	3.89	QP	HORIZONTAL
6	326.74	20.60	14.37	5.63	40.60	46.00	5.40	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 55

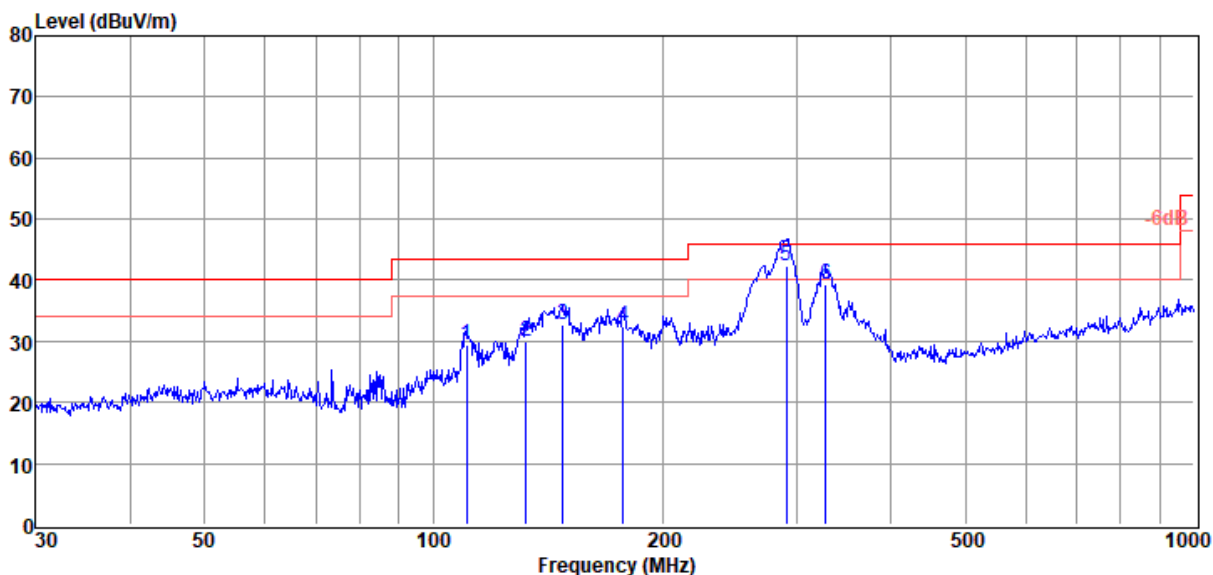

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	110.57	13.00	12.09	4.30	29.39	43.50	14.11	QP	HORIZONTAL
2	132.22	16.82	8.81	4.44	30.07	43.50	13.43	QP	HORIZONTAL
3	147.92	19.36	8.72	4.55	32.63	43.50	10.87	QP	HORIZONTAL
4	177.51	17.73	9.95	4.70	32.38	43.50	11.12	QP	HORIZONTAL
5	291.04	23.59	13.38	5.47	42.44	46.00	3.56	QP	HORIZONTAL
6	327.89	19.21	14.42	5.64	39.27	46.00	6.73	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 56

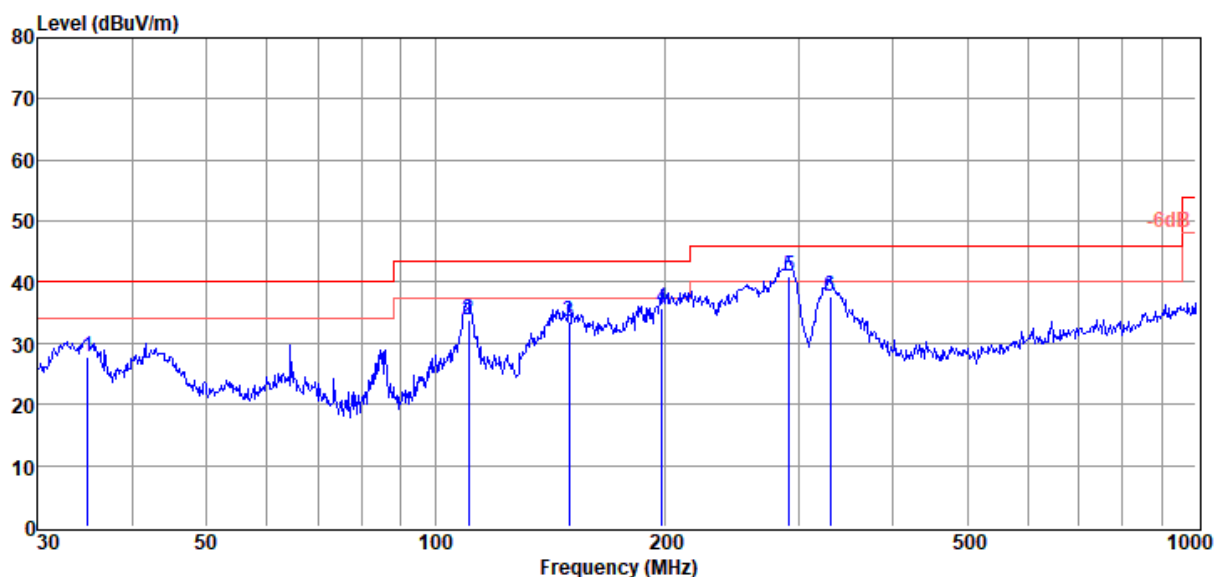

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.88	12.68	11.69	3.40	27.77	40.00	12.23	QP	VERTICAL
2	110.57	17.35	12.09	4.30	33.74	43.50	9.76	QP	VERTICAL
3	150.01	19.92	9.10	4.56	33.58	43.50	9.92	QP	VERTICAL
4	198.59	19.54	11.36	4.80	35.70	43.50	7.80	QP	VERTICAL
5	292.06	22.07	13.46	5.48	41.01	46.00	4.99	QP	VERTICAL
6	330.20	17.53	14.51	5.65	37.69	46.00	8.31	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + Earphone +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 57

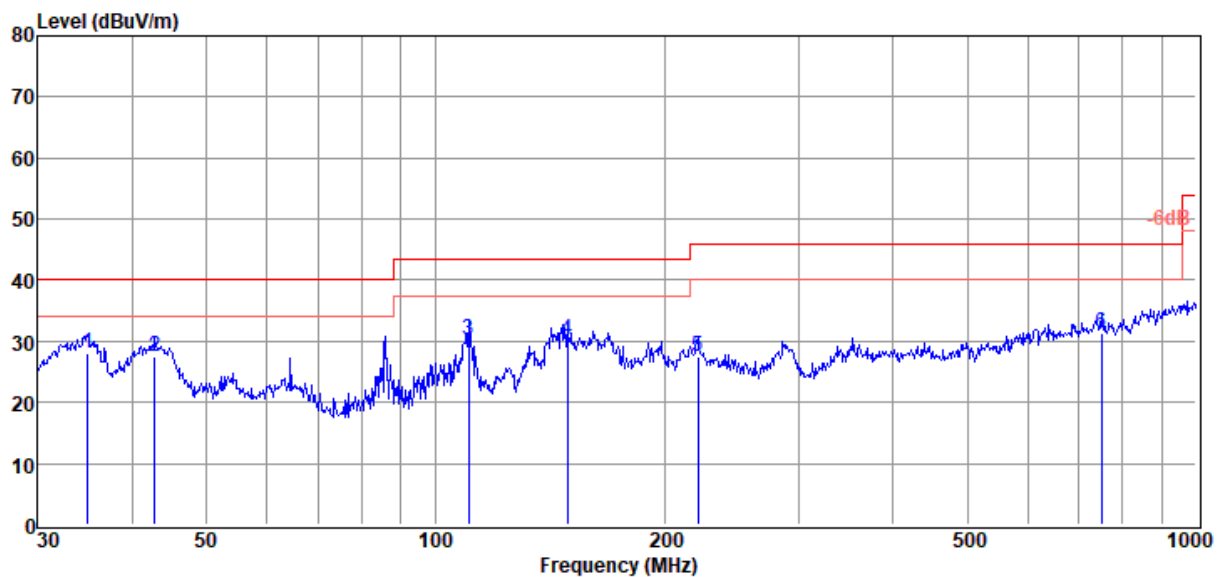

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	34.88	12.87	11.69	3.40	27.96	40.00	12.04	QP	VERTICAL
2	42.75	10.74	13.37	3.48	27.59	40.00	12.41	QP	VERTICAL
3	110.57	13.77	12.09	4.30	30.16	43.50	13.34	QP	VERTICAL
4	148.96	16.93	8.80	4.55	30.28	43.50	13.22	QP	VERTICAL
5	221.39	10.97	11.41	5.04	27.42	46.00	18.58	QP	VERTICAL
6	750.11	3.82	20.30	7.11	31.23	46.00	14.77	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + Earphone +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 58

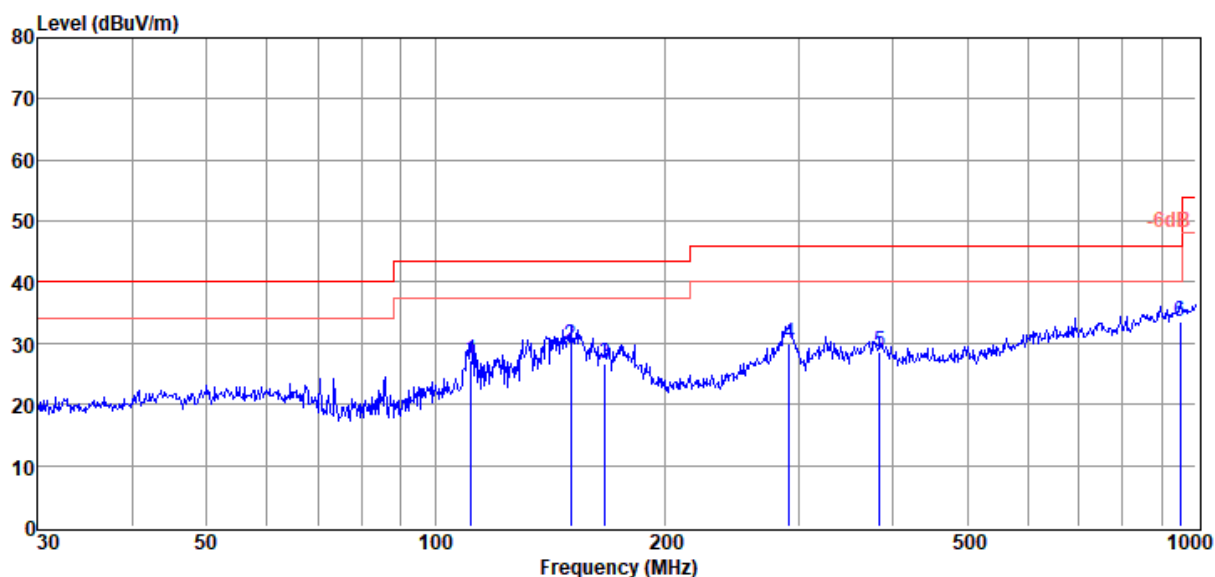

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	111.35	10.96	11.97	4.30	27.23	43.50	16.27	QP	HORIZONTAL
2	150.54	15.88	9.21	4.56	29.65	43.50	13.85	QP	HORIZONTAL
3	167.24	12.48	9.63	4.65	26.76	43.50	16.74	QP	HORIZONTAL
4	292.06	11.00	13.46	5.48	29.94	46.00	16.06	QP	HORIZONTAL
5	383.93	6.61	16.21	5.87	28.69	46.00	17.31	QP	HORIZONTAL
6	952.09	3.40	22.47	7.77	33.64	46.00	12.36	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + Earphone +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 59

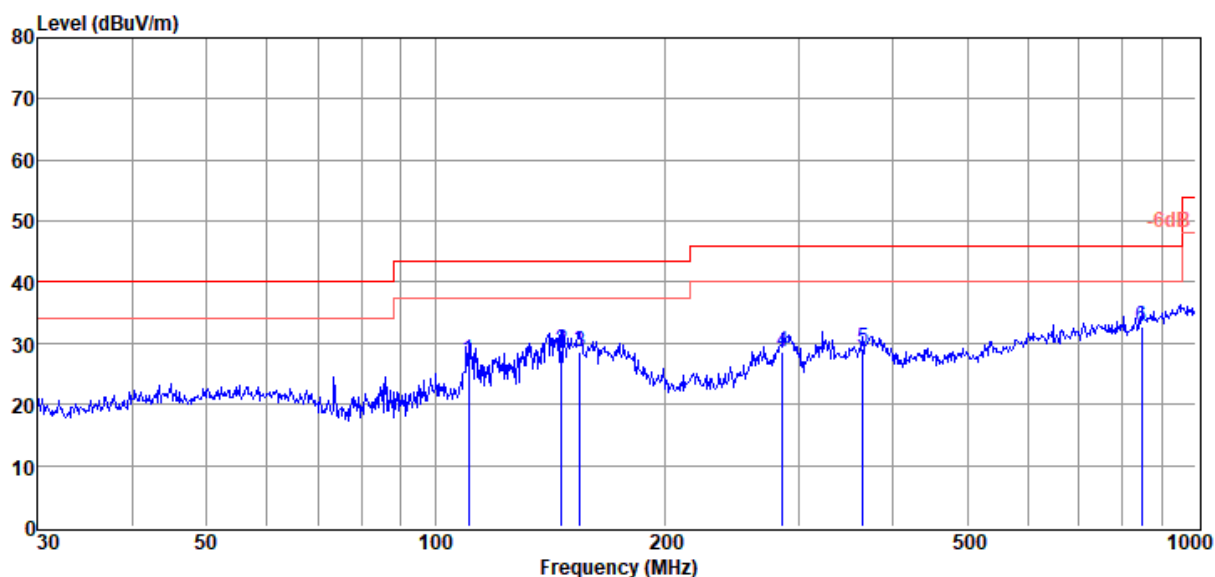

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	110.57	10.81	12.09	4.30	27.20	43.50	16.30	QP	HORIZONTAL
2	146.37	15.42	8.87	4.54	28.83	43.50	14.67	QP	HORIZONTAL
3	154.82	14.76	9.16	4.58	28.50	43.50	15.00	QP	HORIZONTAL
4	285.98	10.02	13.22	5.44	28.68	46.00	17.32	QP	HORIZONTAL
5	364.26	7.91	15.47	5.79	29.17	46.00	16.83	QP	HORIZONTAL
6	848.06	3.56	21.67	7.45	32.68	46.00	13.32	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + Earphone +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 60

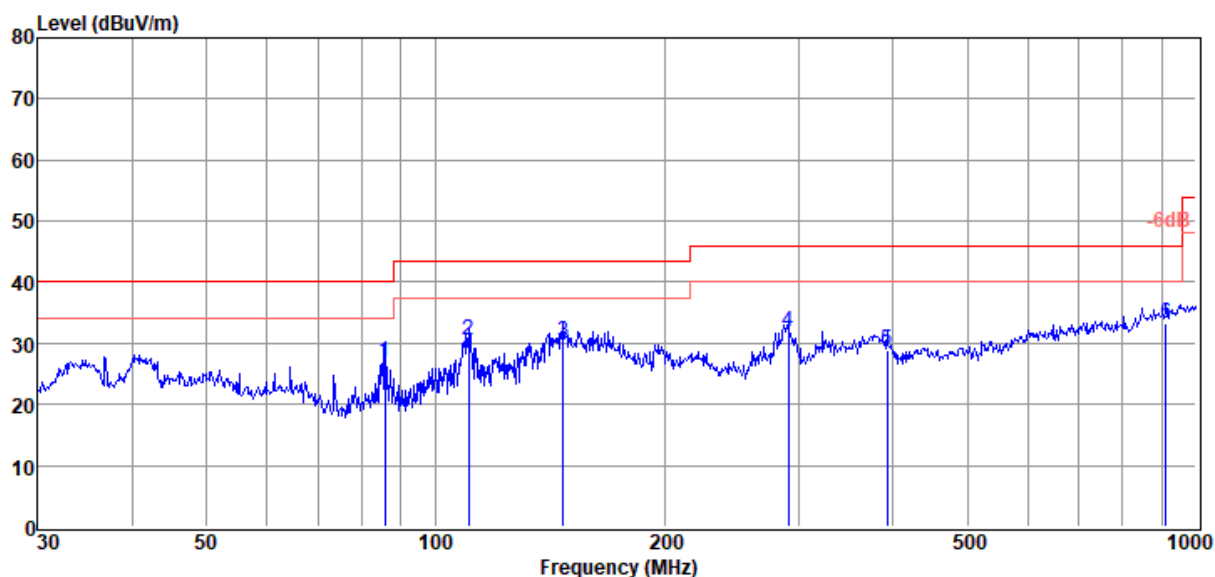

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	13.47	9.41	3.98	26.86	40.00	13.14	QP	VERTICAL
2	110.57	14.02	12.09	4.30	30.41	43.50	13.09	QP	VERTICAL
3	147.40	16.87	8.88	4.54	30.29	43.50	13.21	QP	VERTICAL
4	291.04	13.07	13.38	5.47	31.92	46.00	14.08	QP	VERTICAL
5	392.10	6.72	16.25	5.91	28.88	46.00	17.12	QP	VERTICAL
6	912.86	3.60	22.01	7.63	33.24	46.00	12.76	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + Earphone
+ TWS + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 61

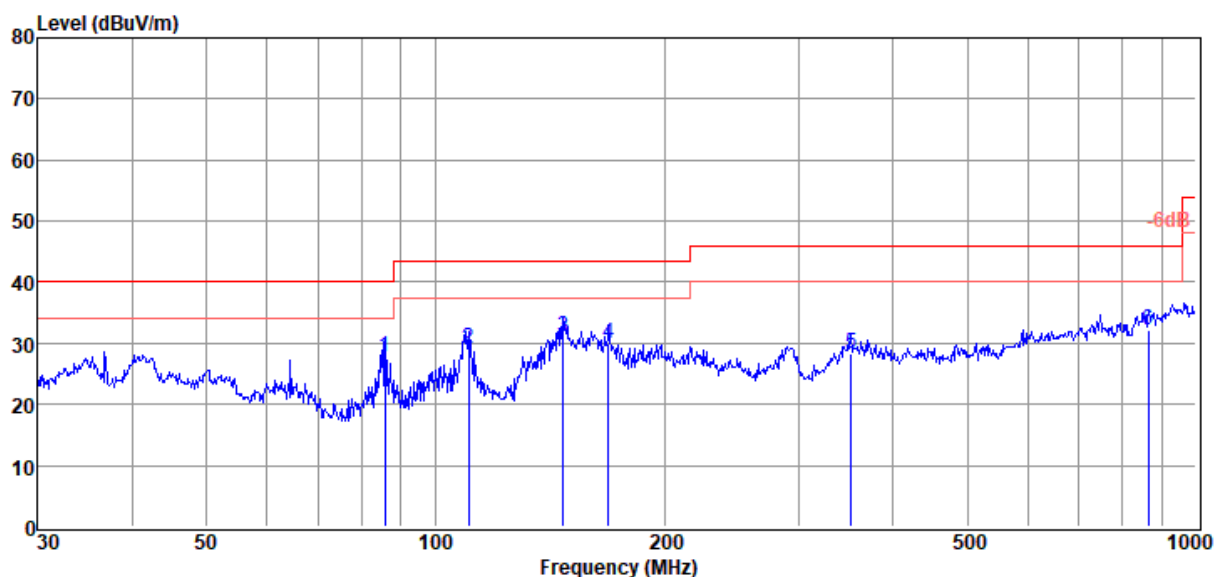

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	14.41	9.41	3.98	27.80	40.00	12.20	QP	VERTICAL
2	110.57	12.64	12.09	4.30	29.03	43.50	14.47	QP	VERTICAL
3	147.40	17.54	8.88	4.54	30.96	43.50	12.54	QP	VERTICAL
4	169.01	15.73	9.50	4.66	29.89	43.50	13.61	QP	VERTICAL
5	351.71	6.96	15.50	5.74	28.20	46.00	17.80	QP	VERTICAL
6	866.09	3.22	21.34	7.50	32.06	46.00	13.94	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + Earphone
+ TWS + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 62

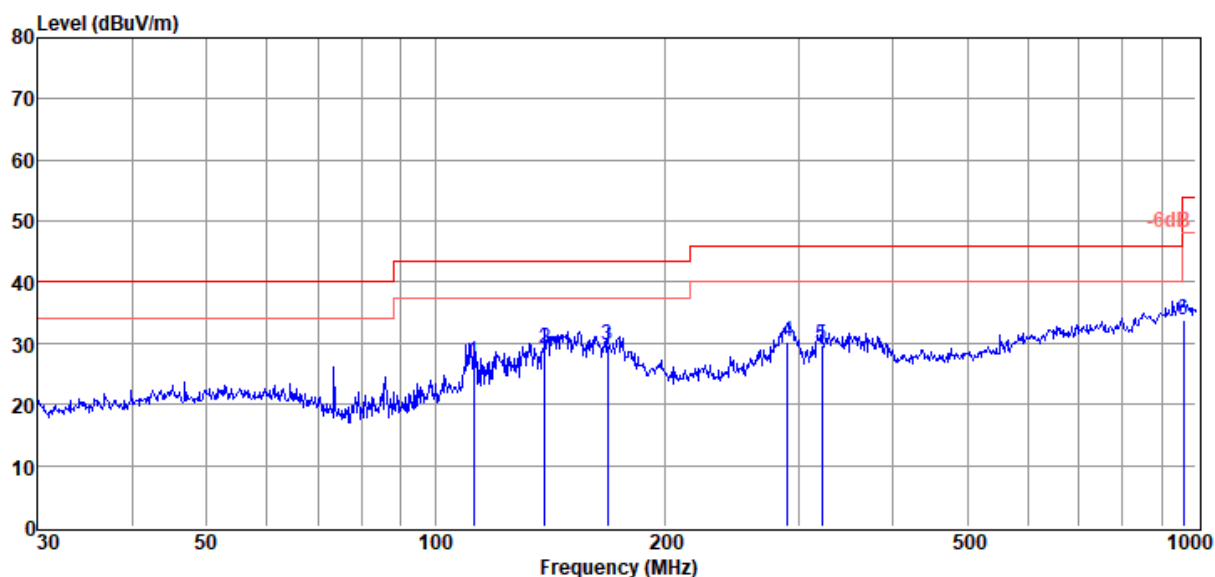

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	112.13	10.69	11.91	4.31	26.91	43.50	16.59	QP	HORIZONTAL
2	139.36	15.94	8.74	4.49	29.17	43.50	14.33	QP	HORIZONTAL
3	168.41	15.49	9.44	4.65	29.58	43.50	13.92	QP	HORIZONTAL
4	290.02	11.53	13.30	5.46	30.29	46.00	15.71	QP	HORIZONTAL
5	322.19	9.73	14.30	5.61	29.64	46.00	16.36	QP	HORIZONTAL
6	962.16	3.72	22.40	7.80	33.92	54.00	20.08	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Bluetooth + Earphone
+ TWS + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 63

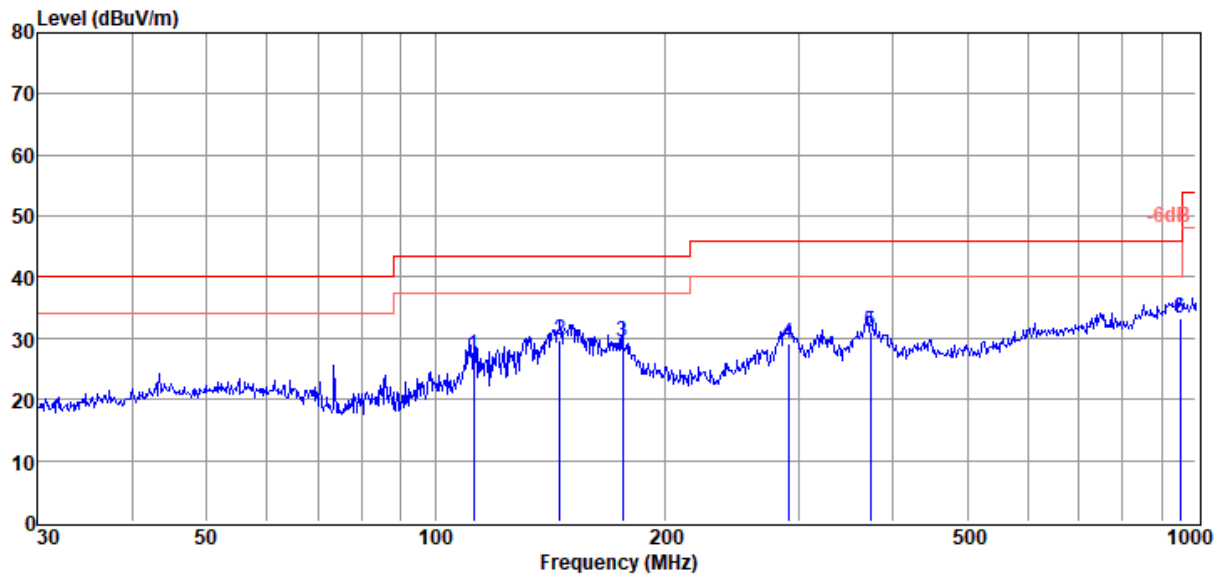

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	112.13	10.86	11.91	4.31	27.08	43.50	16.42	QP	HORIZONTAL
2	145.86	16.26	8.83	4.53	29.62	43.50	13.88	QP	HORIZONTAL
3	176.27	14.69	9.95	4.69	29.33	43.50	14.17	QP	HORIZONTAL
4	291.04	10.23	13.38	5.47	29.08	46.00	16.92	QP	HORIZONTAL
5	373.31	9.41	15.93	5.83	31.17	46.00	14.83	QP	HORIZONTAL
6	952.09	3.09	22.47	7.77	33.33	46.00	12.67	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Bluetooth + Earphone
+ TWS + MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 64

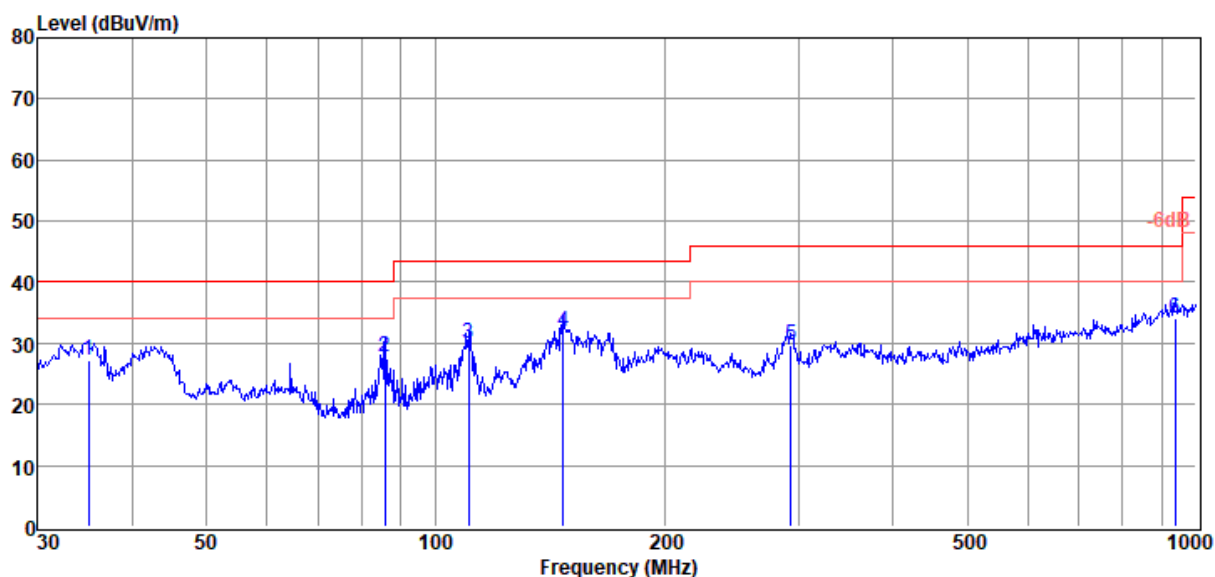

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	35.01	12.18	11.70	3.40	27.28	40.00	12.72	QP	VERTICAL
2	85.90	14.44	9.41	3.98	27.83	40.00	12.17	QP	VERTICAL
3	110.57	13.58	12.09	4.30	29.97	43.50	13.53	QP	VERTICAL
4	147.40	18.34	8.88	4.54	31.76	43.50	11.74	QP	VERTICAL
5	293.08	10.67	13.55	5.48	29.70	46.00	16.30	QP	VERTICAL
6	938.83	4.46	21.95	7.72	34.13	46.00	11.87	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 65

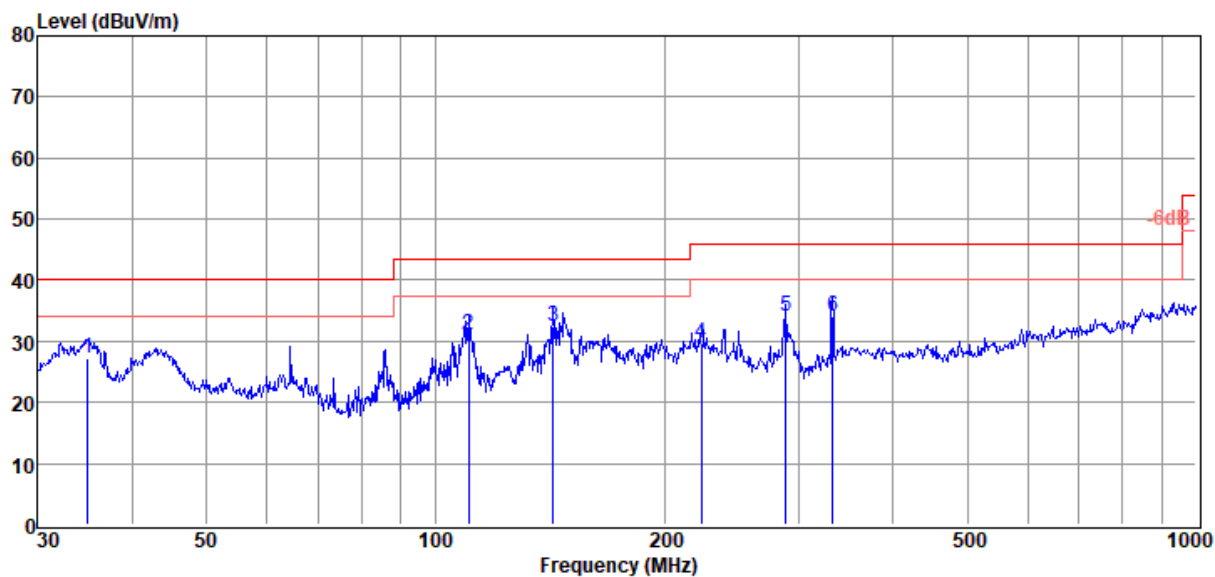

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	34.88	12.20	11.69	3.40	27.29	40.00	12.71	QP	VERTICAL
2	110.57	14.69	12.09	4.30	31.08	43.50	12.42	QP	VERTICAL
3	142.82	18.89	8.98	4.51	32.38	43.50	11.12	QP	VERTICAL
4	223.73	13.07	11.60	5.06	29.73	46.00	16.27	QP	VERTICAL
5	289.00	15.22	13.28	5.46	33.96	46.00	12.04	QP	VERTICAL
6	332.52	13.94	14.60	5.66	34.20	46.00	11.80	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 66

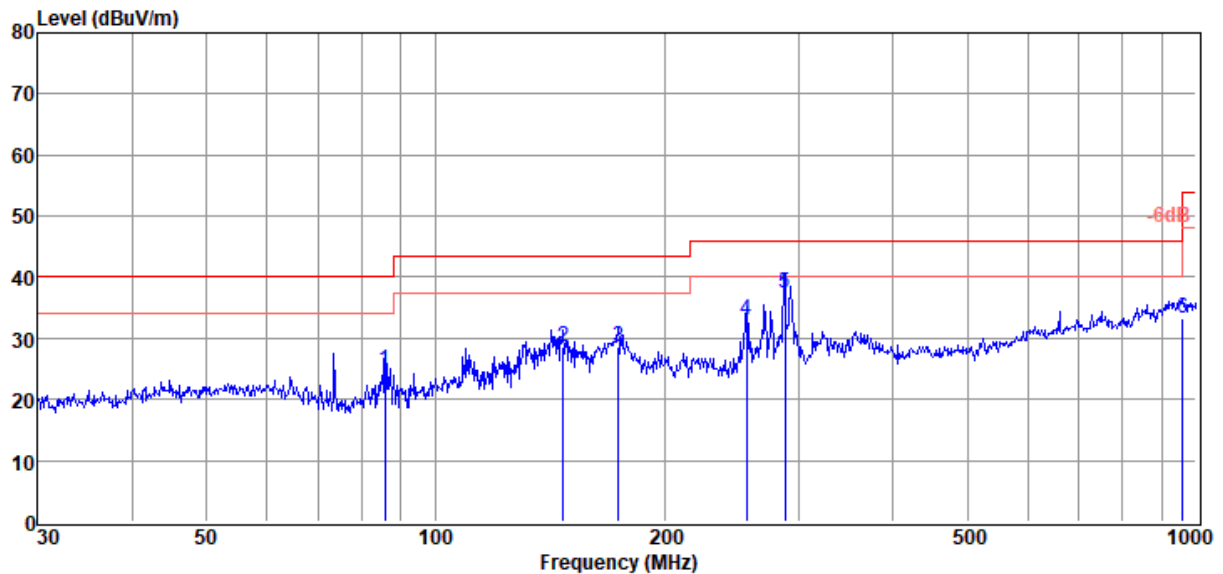

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	11.48	9.41	3.98	24.87	40.00	15.13	QP	HORIZONTAL
2	147.40	15.05	8.88	4.54	28.47	43.50	15.03	QP	HORIZONTAL
3	173.81	13.98	9.94	4.68	28.60	43.50	14.90	QP	HORIZONTAL
4	256.52	15.48	12.34	5.28	33.10	46.00	12.90	QP	HORIZONTAL
5	287.99	18.74	13.26	5.45	37.45	46.00	8.55	QP	HORIZONTAL
6	958.79	3.22	22.38	7.79	33.39	46.00	12.61	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 67

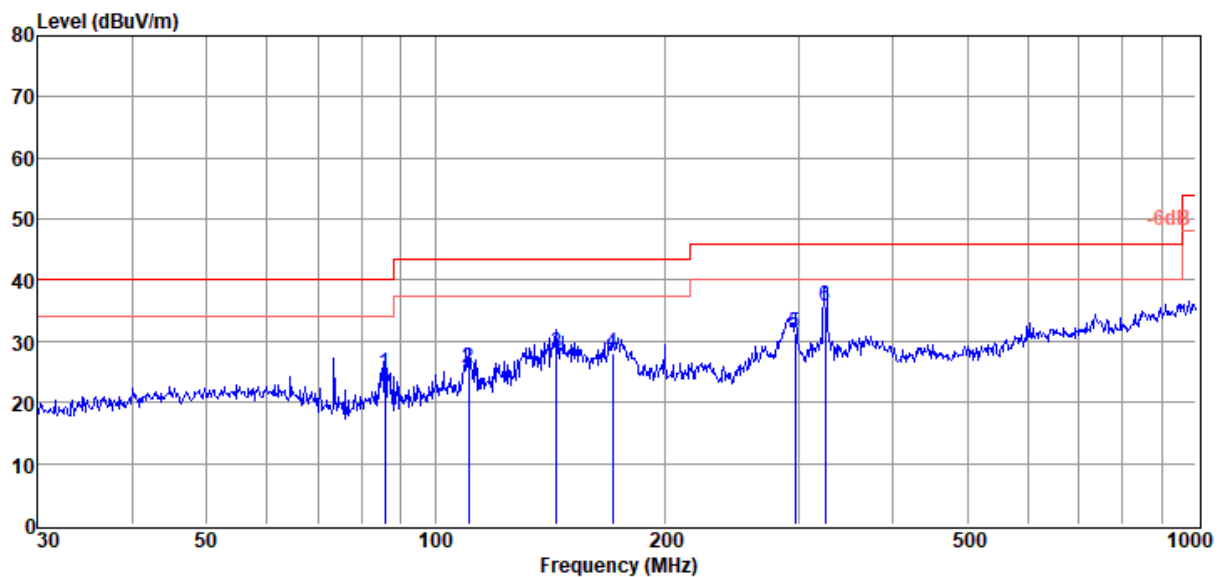

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	11.34	9.41	3.98	24.73	40.00	15.27	QP	HORIZONTAL
2	110.57	9.28	12.09	4.30	25.67	43.50	17.83	QP	HORIZONTAL
3	144.34	14.03	9.40	4.52	27.95	43.50	15.55	QP	HORIZONTAL
4	170.79	13.77	9.62	4.66	28.05	43.50	15.45	QP	HORIZONTAL
5	297.22	12.06	13.70	5.50	31.26	46.00	14.74	QP	HORIZONTAL
6	325.60	15.90	14.32	5.63	35.85	46.00	10.15	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-20**Tested By** : Antony Zeng**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:21.8°C, Humi:58.1%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The first: FG4CELL21201

Data: 68

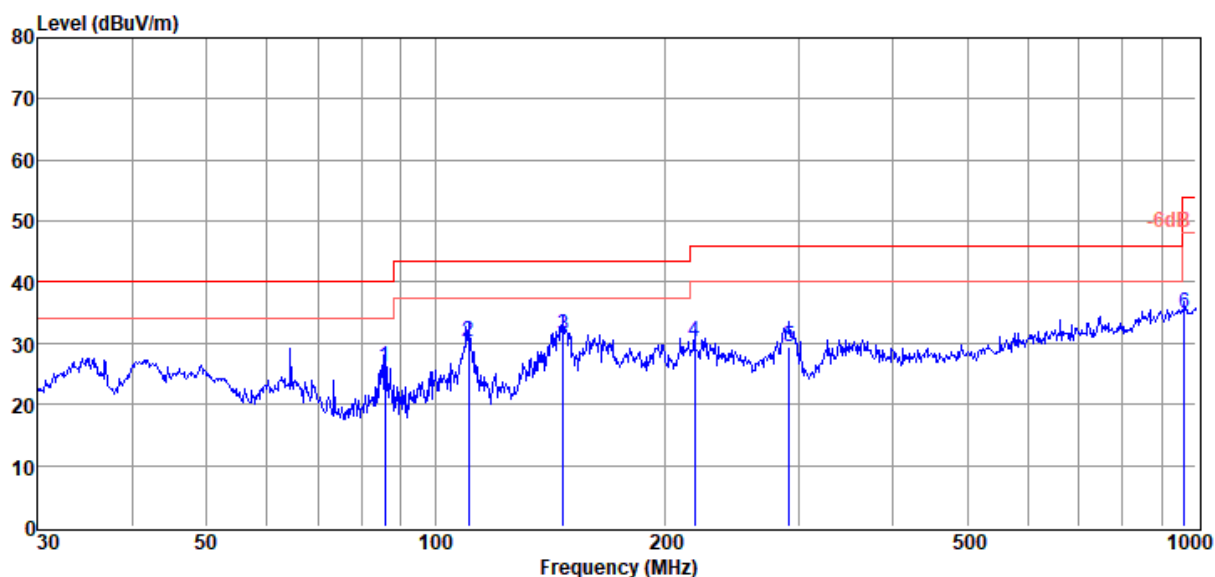

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	12.82	9.41	3.98	26.21	40.00	13.79	QP	VERTICAL
2	110.57	13.88	12.09	4.30	30.27	43.50	13.23	QP	VERTICAL
3	147.40	18.04	8.88	4.54	31.46	43.50	12.04	QP	VERTICAL
4	219.08	13.88	11.26	5.01	30.15	46.00	15.85	QP	VERTICAL
5	292.06	10.58	13.46	5.48	29.52	46.00	16.48	QP	VERTICAL
6	965.54	4.77	22.36	7.81	34.94	54.00	19.06	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Aux in + 5V/1A load + MIC*2 +
Guitar mode

Condition : Temp:20.7°C,Humi:59.8%

Antenna/Distance : 2023 VULB 9163 #1/3m/VERTICAL

Memo : The second: FG4CELL21700GP

Data: 69

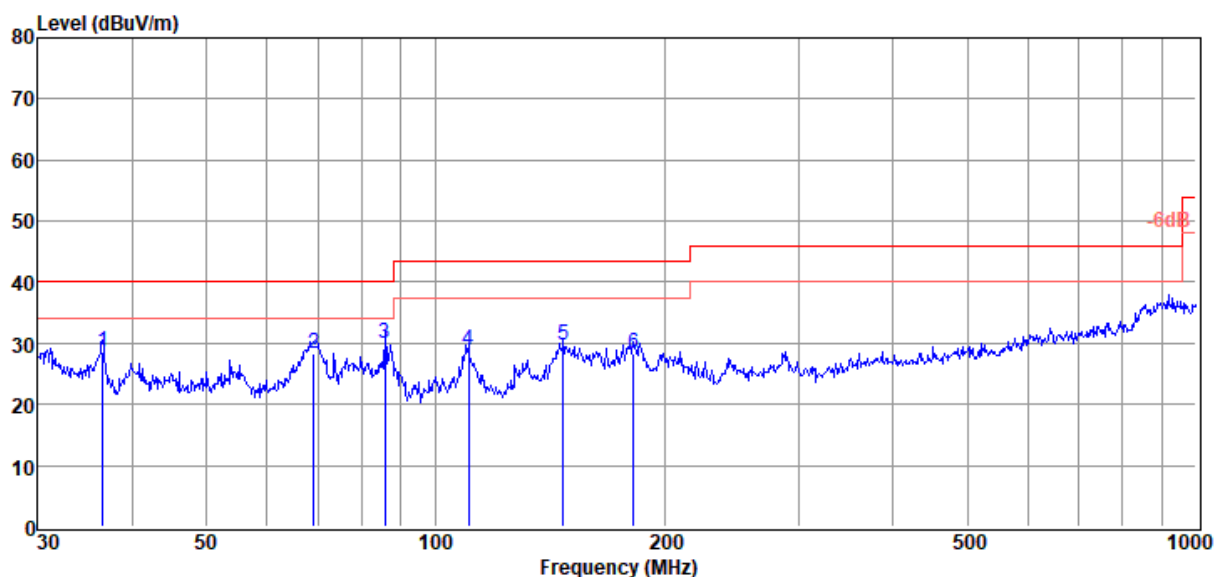

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.51	13.11	12.10	3.42	28.63	40.00	11.37	QP	VERTICAL
2	69.11	13.57	10.93	3.76	28.26	40.00	11.74	QP	VERTICAL
3	85.90	16.66	9.41	3.98	30.05	40.00	9.95	QP	VERTICAL
4	110.57	12.48	12.09	4.30	28.87	43.50	14.63	QP	VERTICAL
5	147.40	16.33	8.88	4.54	29.75	43.50	13.75	QP	VERTICAL
6	181.92	13.67	9.90	4.72	28.29	43.50	15.21	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 70

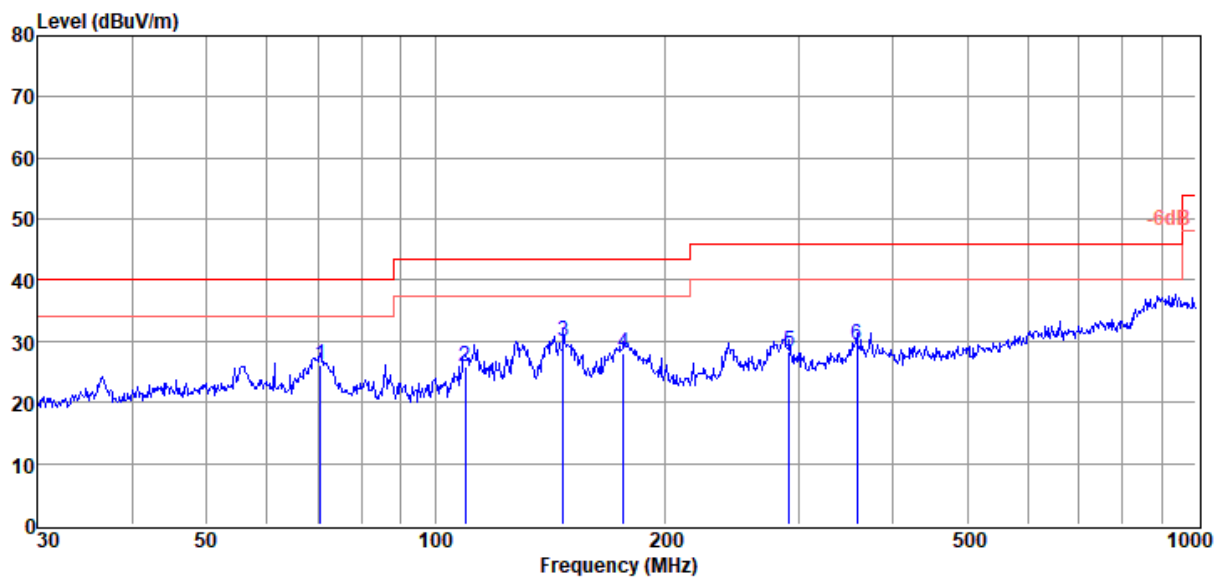

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	70.58	12.17	10.05	3.77	25.99	40.00	14.01	QP	HORIZONTAL
2	109.41	9.16	12.38	4.29	25.83	43.50	17.67	QP	HORIZONTAL
3	147.40	16.60	8.88	4.54	30.02	43.50	13.48	QP	HORIZONTAL
4	176.89	13.33	10.08	4.69	28.10	43.50	15.40	QP	HORIZONTAL
5	292.06	9.30	13.46	5.48	28.24	46.00	17.76	QP	HORIZONTAL
6	357.93	8.28	15.38	5.76	29.42	46.00	16.58	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 71

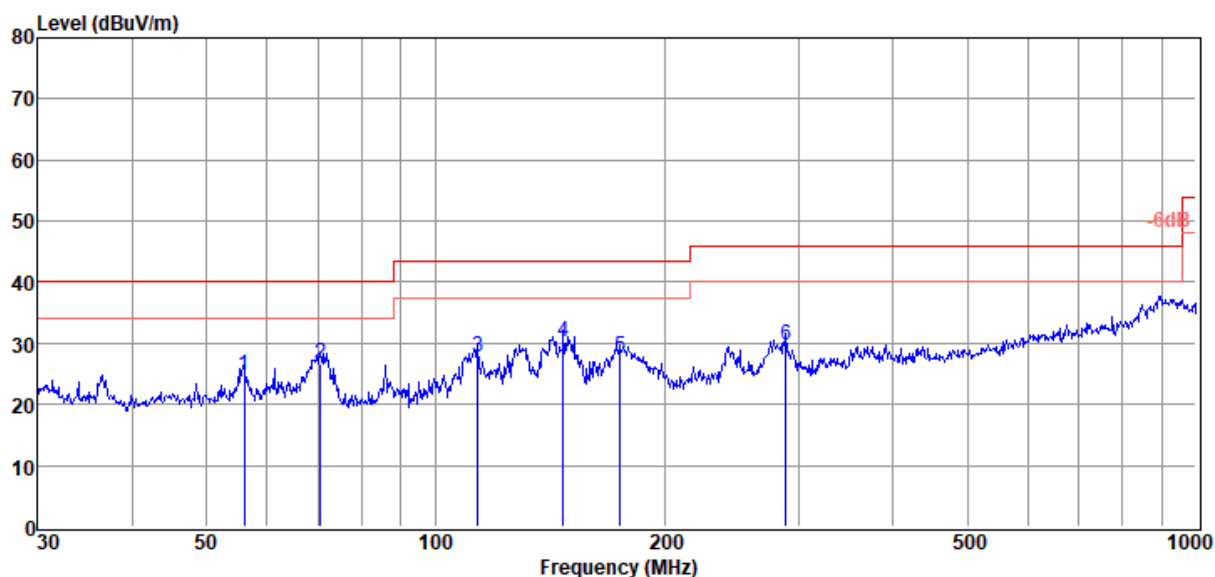

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	56.00	8.13	12.90	3.62	24.65	40.00	15.35	QP	HORIZONTAL
2	70.58	12.79	10.05	3.77	26.61	40.00	13.39	QP	HORIZONTAL
3	113.71	11.73	11.64	4.32	27.69	43.50	15.81	QP	HORIZONTAL
4	147.40	16.81	8.88	4.54	30.23	43.50	13.27	QP	HORIZONTAL
5	175.04	13.25	9.80	4.69	27.74	43.50	15.76	QP	HORIZONTAL
6	289.00	10.88	13.28	5.46	29.62	46.00	16.38	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load + MIC*2 +
Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 72

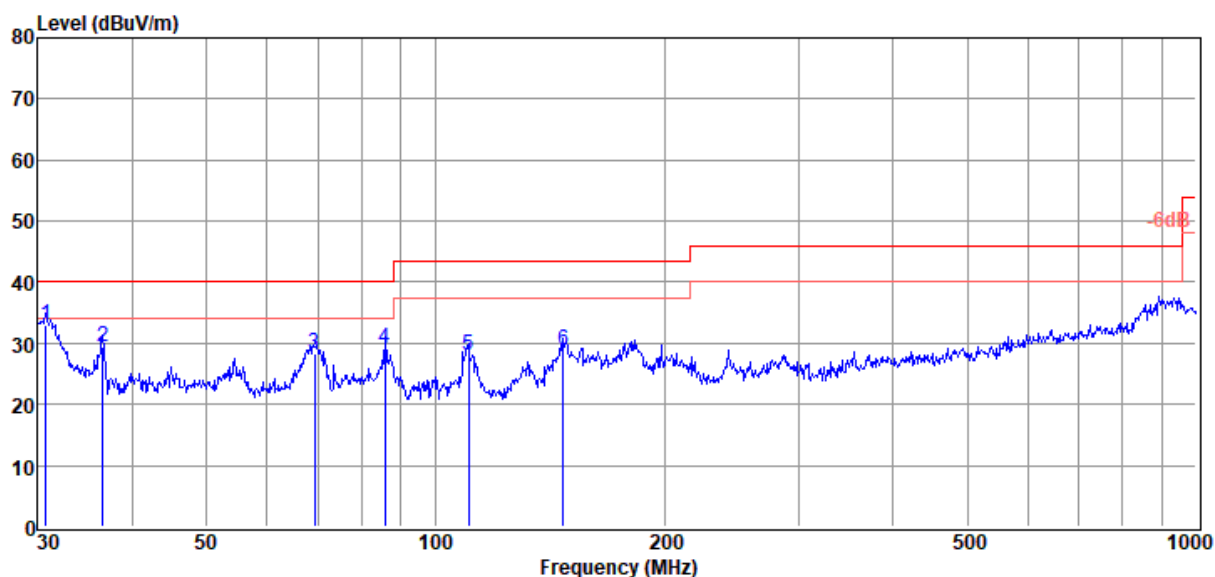

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.75	18.62	10.93	3.36	32.91	40.00	7.09	QP	VERTICAL
2	36.51	13.87	12.10	3.42	29.39	40.00	10.61	QP	VERTICAL
3	69.36	13.77	10.79	3.76	28.32	40.00	11.68	QP	VERTICAL
4	85.90	15.64	9.41	3.98	29.03	40.00	10.97	QP	VERTICAL
5	110.57	11.61	12.09	4.30	28.00	43.50	15.50	QP	VERTICAL
6	147.40	15.34	8.88	4.54	28.76	43.50	14.74	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 73

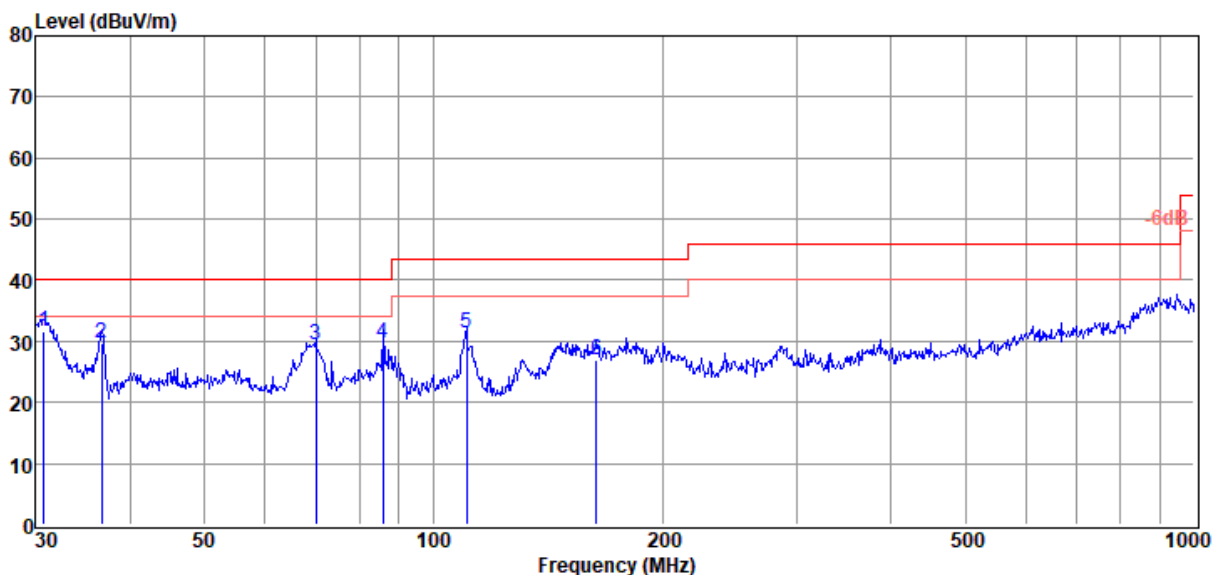

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	30.75	17.30	10.93	3.36	31.59	40.00	8.41	QP	VERTICAL
2	36.64	14.27	12.13	3.42	29.82	40.00	10.18	QP	VERTICAL
3	70.09	15.43	10.35	3.77	29.55	40.00	10.45	QP	VERTICAL
4	85.90	16.40	9.41	3.98	29.79	40.00	10.21	QP	VERTICAL
5	110.57	14.99	12.09	4.30	31.38	43.50	12.12	QP	VERTICAL
6	163.76	12.84	9.60	4.63	27.07	43.50	16.43	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 74

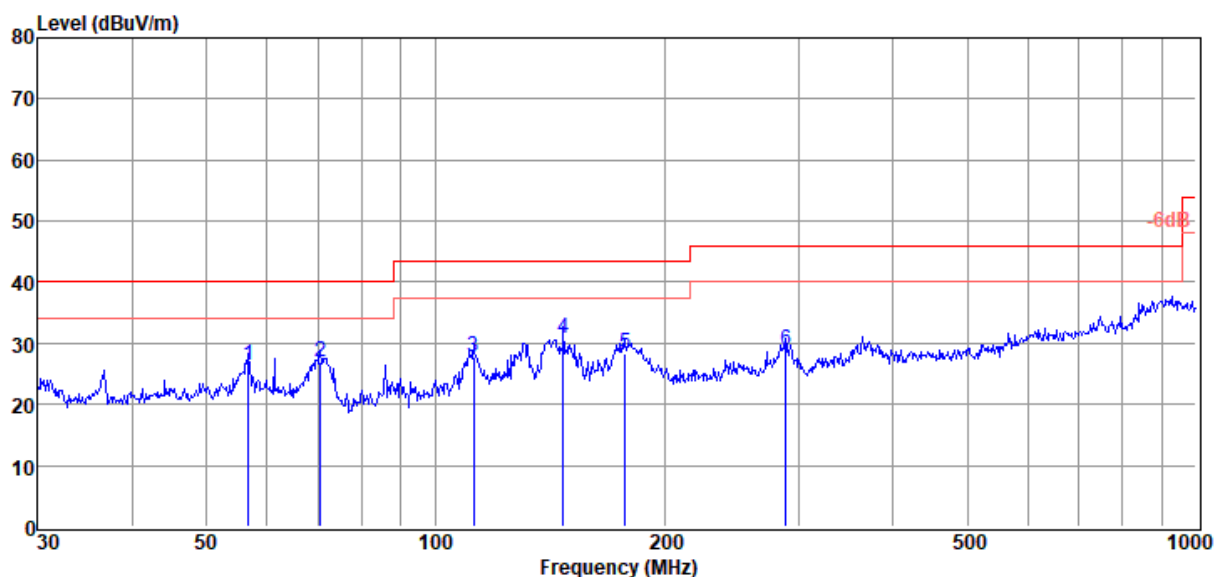

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	56.79	9.79	12.90	3.63	26.32	40.00	13.68	QP	HORIZONTAL
2	70.58	13.03	10.05	3.77	26.85	40.00	13.15	QP	HORIZONTAL
3	112.13	11.60	11.91	4.31	27.82	43.50	15.68	QP	HORIZONTAL
4	147.40	17.33	8.88	4.54	30.75	43.50	12.75	QP	HORIZONTAL
5	177.51	13.73	9.95	4.70	28.38	43.50	15.12	QP	HORIZONTAL
6	289.00	10.06	13.28	5.46	28.80	46.00	17.20	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 75

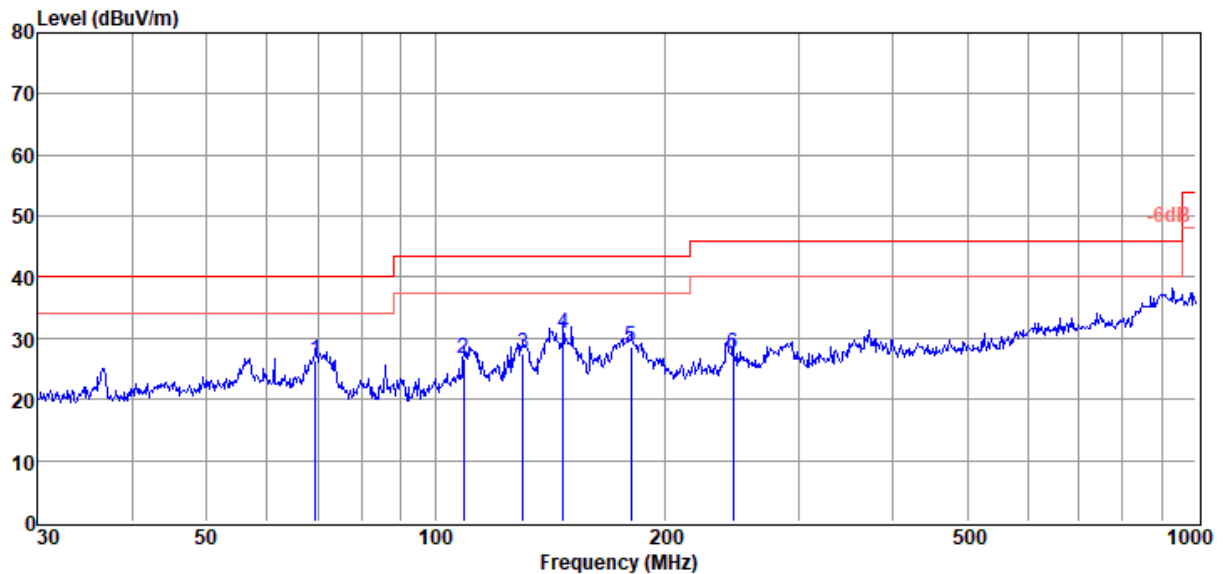

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	69.60	11.90	10.64	3.76	26.30	40.00	13.70	QP	HORIZONTAL
2	109.03	9.78	12.49	4.29	26.56	43.50	16.94	QP	HORIZONTAL
3	130.38	13.76	9.40	4.43	27.59	43.50	15.91	QP	HORIZONTAL
4	147.40	17.26	8.88	4.54	30.68	43.50	12.82	QP	HORIZONTAL
5	180.65	14.07	9.94	4.71	28.72	43.50	14.78	QP	HORIZONTAL
6	245.95	10.24	12.10	5.22	27.56	46.00	18.44	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + TWS + 5V/1A load
+ MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 76

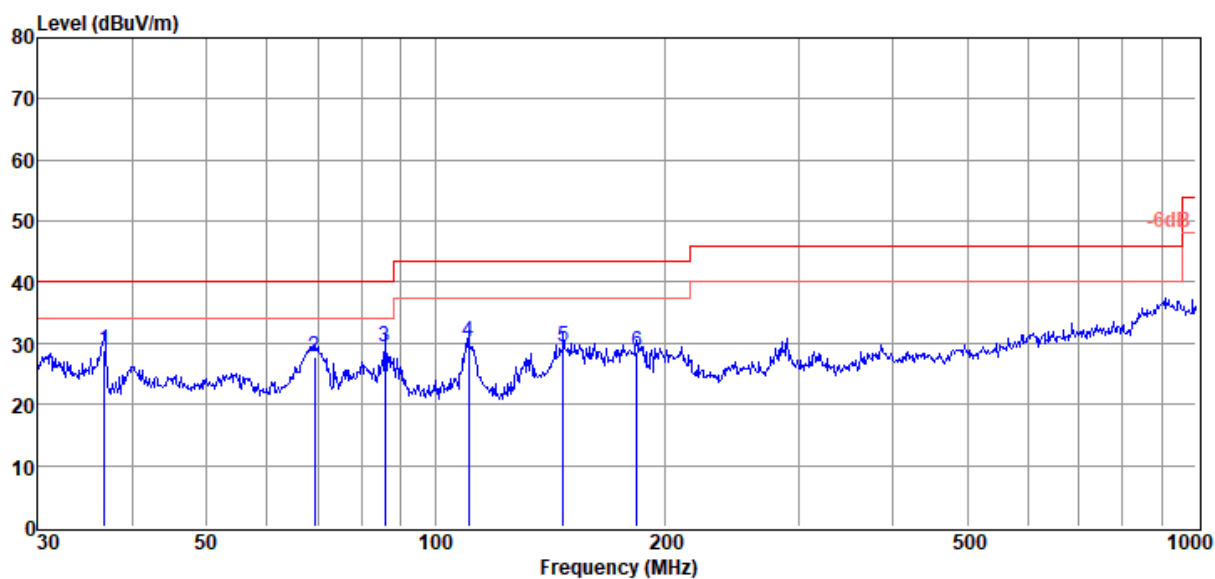

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.77	13.35	12.15	3.42	28.92	40.00	11.08	QP	VERTICAL
2	69.36	13.25	10.79	3.76	27.80	40.00	12.20	QP	VERTICAL
3	85.90	16.16	9.41	3.98	29.55	40.00	10.45	QP	VERTICAL
4	110.57	13.86	12.09	4.30	30.25	43.50	13.25	QP	VERTICAL
5	147.40	16.08	8.88	4.54	29.50	43.50	14.00	QP	VERTICAL
6	183.84	13.60	10.32	4.73	28.65	43.50	14.85	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 77

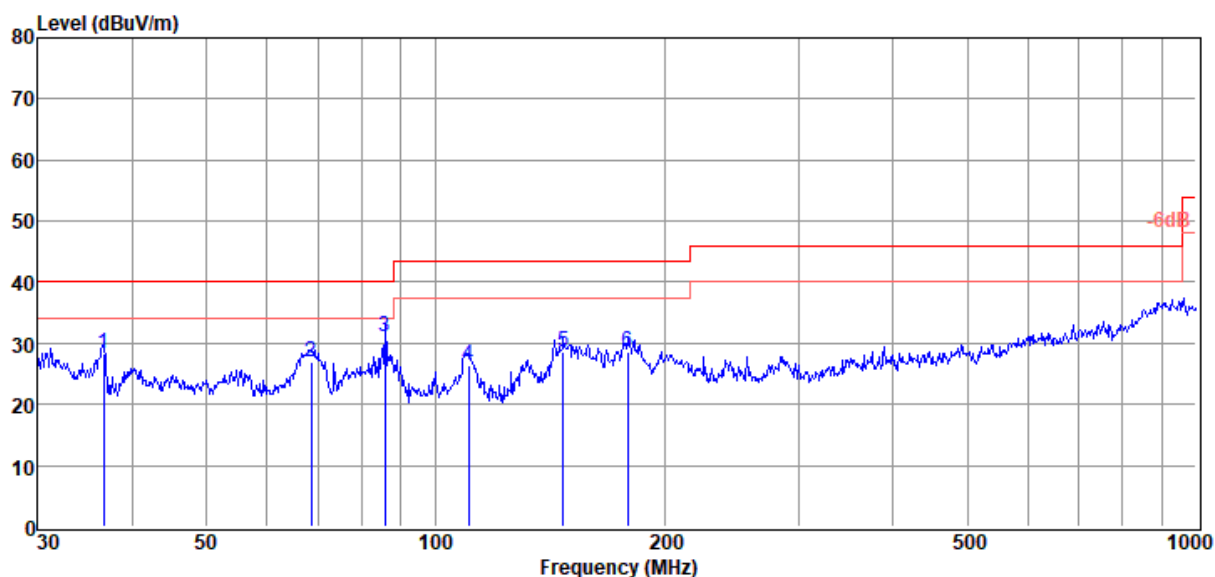

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.64	12.68	12.13	3.42	28.23	40.00	11.77	QP	VERTICAL
2	68.63	12.24	10.89	3.75	26.88	40.00	13.12	QP	VERTICAL
3	85.90	17.73	9.41	3.98	31.12	40.00	8.88	QP	VERTICAL
4	110.57	10.03	12.09	4.30	26.42	43.50	17.08	QP	VERTICAL
5	147.40	15.26	8.88	4.54	28.68	43.50	14.82	QP	VERTICAL
6	178.76	14.01	9.95	4.70	28.66	43.50	14.84	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 78

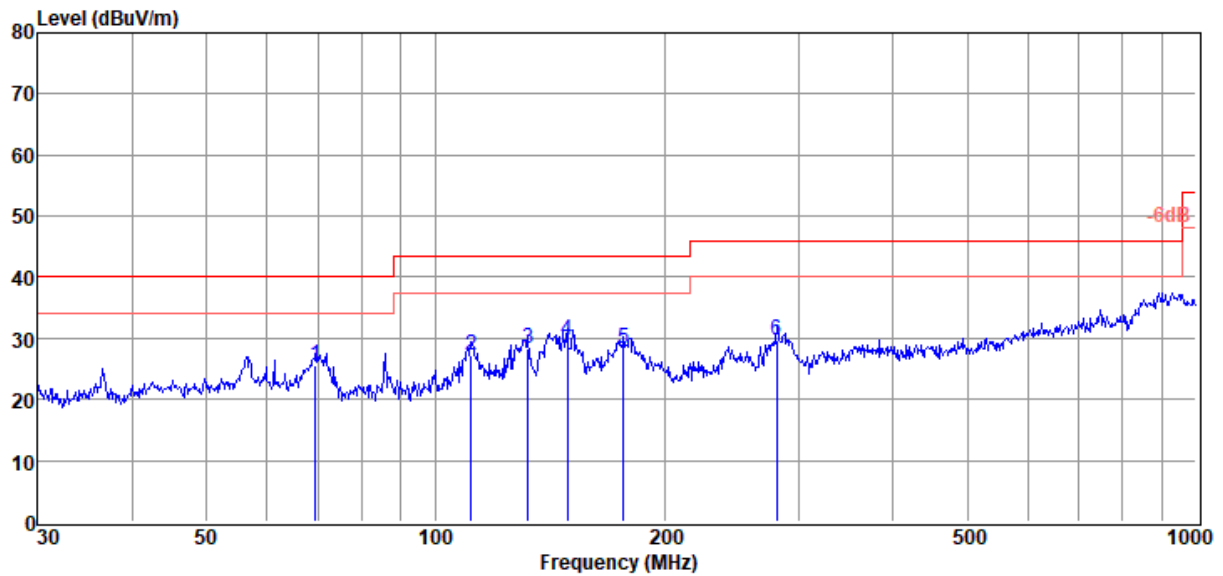

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	69.60	11.12	10.64	3.76	25.52	40.00	14.48	QP	HORIZONTAL
2	111.35	11.06	11.97	4.30	27.33	43.50	16.17	QP	HORIZONTAL
3	132.22	15.01	8.81	4.44	28.26	43.50	15.24	QP	HORIZONTAL
4	148.96	16.21	8.80	4.55	29.56	43.50	13.94	QP	HORIZONTAL
5	176.89	13.50	10.08	4.69	28.27	43.50	15.23	QP	HORIZONTAL
6	281.01	11.34	13.04	5.41	29.79	46.00	16.21	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:20.7°C,Humi:59.8%

Antenna/Distance : 2023 VULB 9163 #1/3m/HORIZONTAL

Memo : The second: FG4CELL21700GP

Data: 79

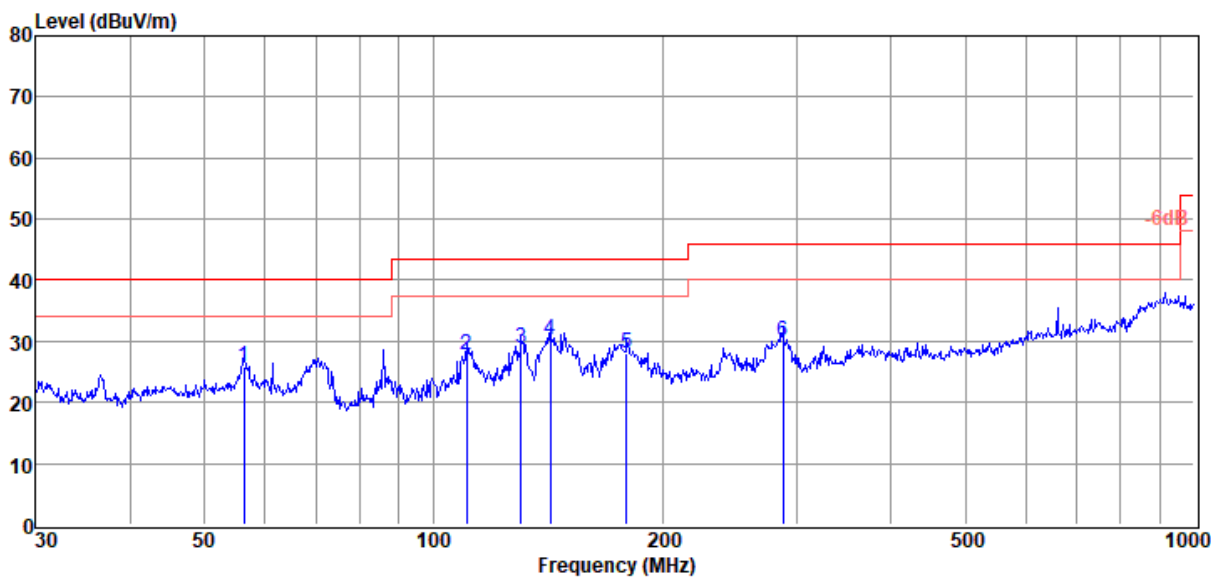

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	56.40	9.36	12.90	3.62	25.88	40.00	14.12	QP	HORIZONTAL
2	110.57	11.29	12.09	4.30	27.68	43.50	15.82	QP	HORIZONTAL
3	130.38	14.91	9.40	4.43	28.74	43.50	14.76	QP	HORIZONTAL
4	142.32	16.79	8.93	4.51	30.23	43.50	13.27	QP	HORIZONTAL
5	179.39	13.44	10.00	4.71	28.15	43.50	15.35	QP	HORIZONTAL
6	287.99	11.38	13.26	5.45	30.09	46.00	15.91	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 80

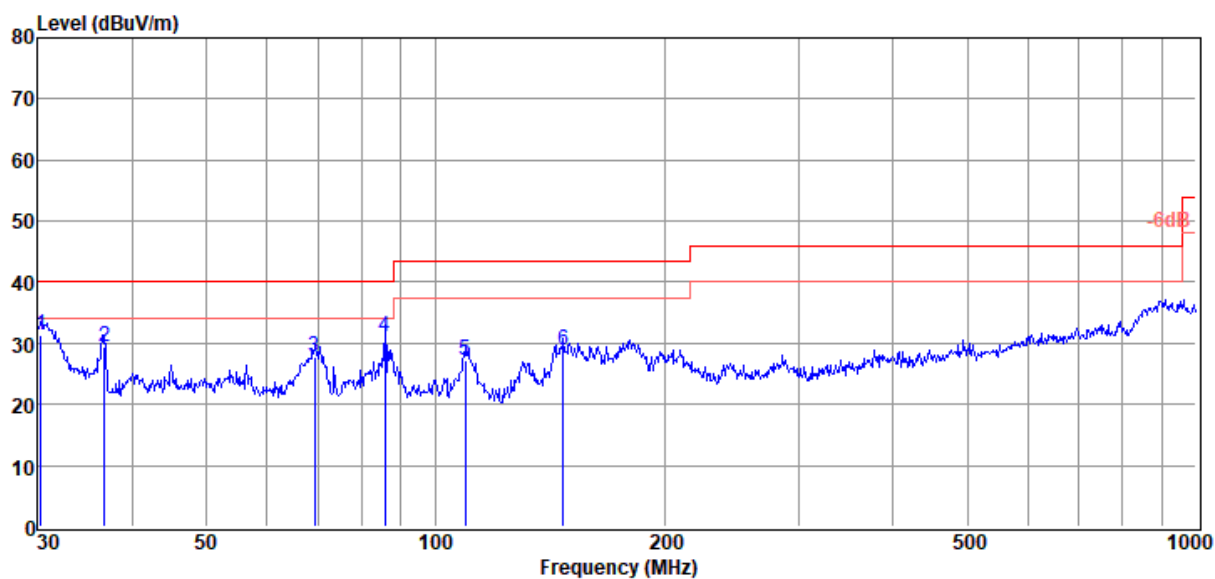

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	30.32	17.14	10.97	3.35	31.46	40.00	8.54	QP	VERTICAL
2	36.77	13.73	12.15	3.42	29.30	40.00	10.70	QP	VERTICAL
3	69.36	13.19	10.79	3.76	27.74	40.00	12.26	QP	VERTICAL
4	85.90	17.66	9.41	3.98	31.05	40.00	8.95	QP	VERTICAL
5	109.41	10.64	12.38	4.29	27.31	43.50	16.19	QP	VERTICAL
6	147.40	15.40	8.88	4.54	28.82	43.50	14.68	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 81

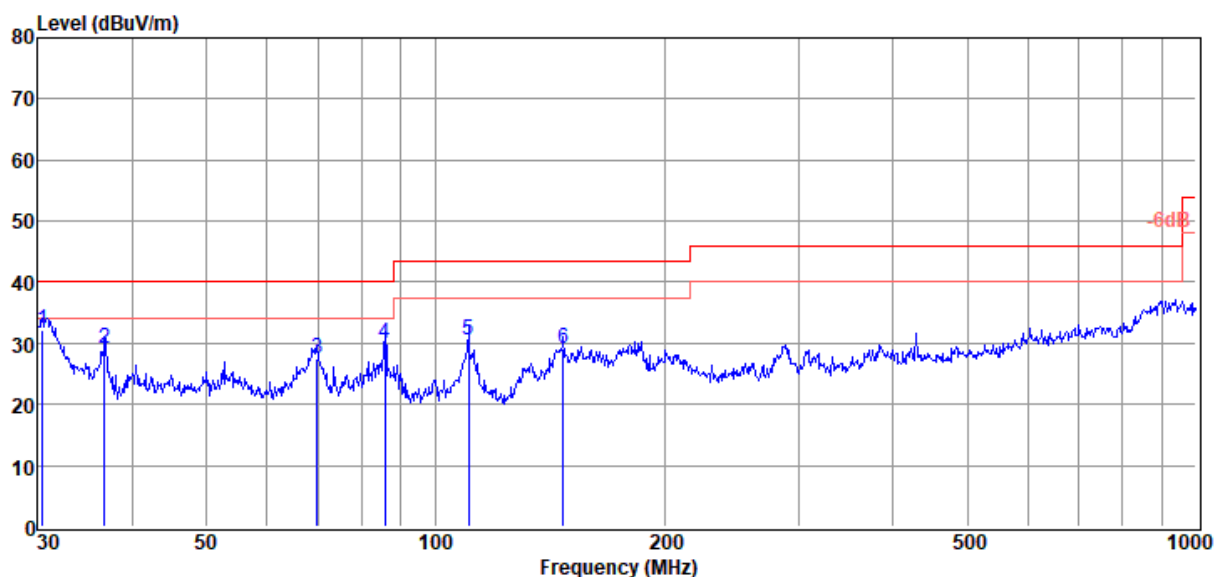

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	30.42	17.89	10.96	3.35	32.20	40.00	7.80	QP	VERTICAL
2	36.77	13.59	12.15	3.42	29.16	40.00	10.84	QP	VERTICAL
3	69.85	13.23	10.49	3.76	27.48	40.00	12.52	QP	VERTICAL
4	85.90	16.60	9.41	3.98	29.99	40.00	10.01	QP	VERTICAL
5	110.57	14.24	12.09	4.30	30.63	43.50	12.87	QP	VERTICAL
6	147.40	15.68	8.88	4.54	29.10	43.50	14.40	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 82

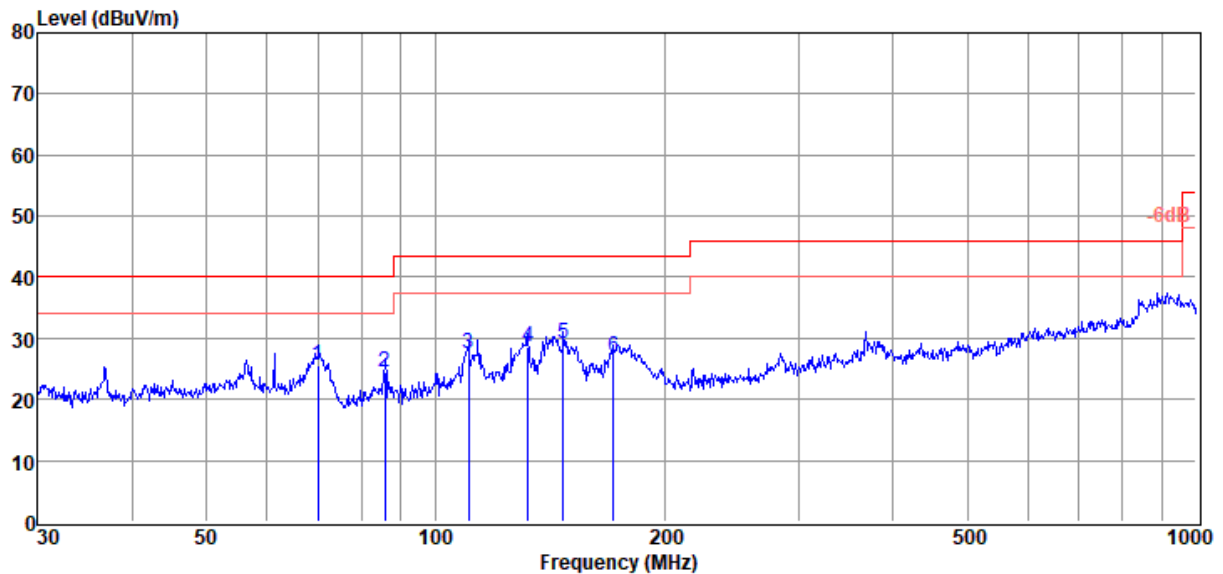

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	70.09	11.44	10.35	3.77	25.56	40.00	14.44	QP	HORIZONTAL
2	85.90	11.21	9.41	3.98	24.60	40.00	15.40	QP	HORIZONTAL
3	110.57	10.97	12.09	4.30	27.36	43.50	16.14	QP	HORIZONTAL
4	132.22	15.42	8.81	4.44	28.67	43.50	14.83	QP	HORIZONTAL
5	147.40	15.67	8.88	4.54	29.09	43.50	14.41	QP	HORIZONTAL
6	171.39	12.47	9.72	4.67	26.86	43.50	16.64	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 83

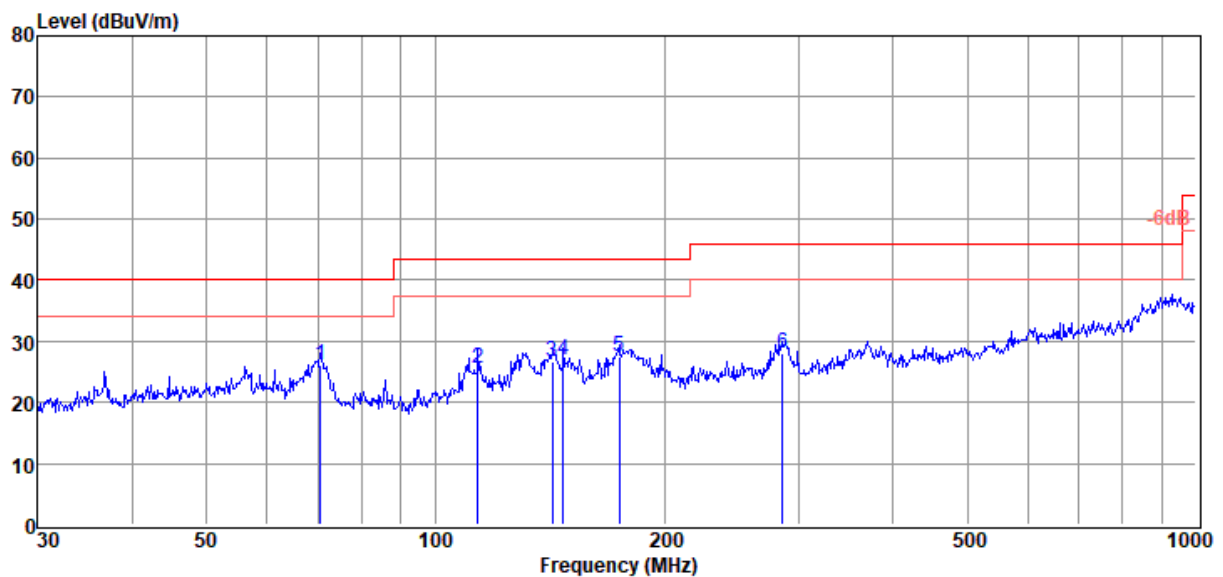

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	70.58	12.27	10.05	3.77	26.09	40.00	13.91	QP	HORIZONTAL
2	113.71	9.62	11.64	4.32	25.58	43.50	17.92	QP	HORIZONTAL
3	142.32	13.28	8.93	4.51	26.72	43.50	16.78	QP	HORIZONTAL
4	147.40	13.49	8.88	4.54	26.91	43.50	16.59	QP	HORIZONTAL
5	174.42	12.90	9.86	4.68	27.44	43.50	16.06	QP	HORIZONTAL
6	285.98	9.42	13.22	5.44	28.08	46.00	17.92	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Bluetooth + Earphone + TWS
+ 5V/1A load + MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 84

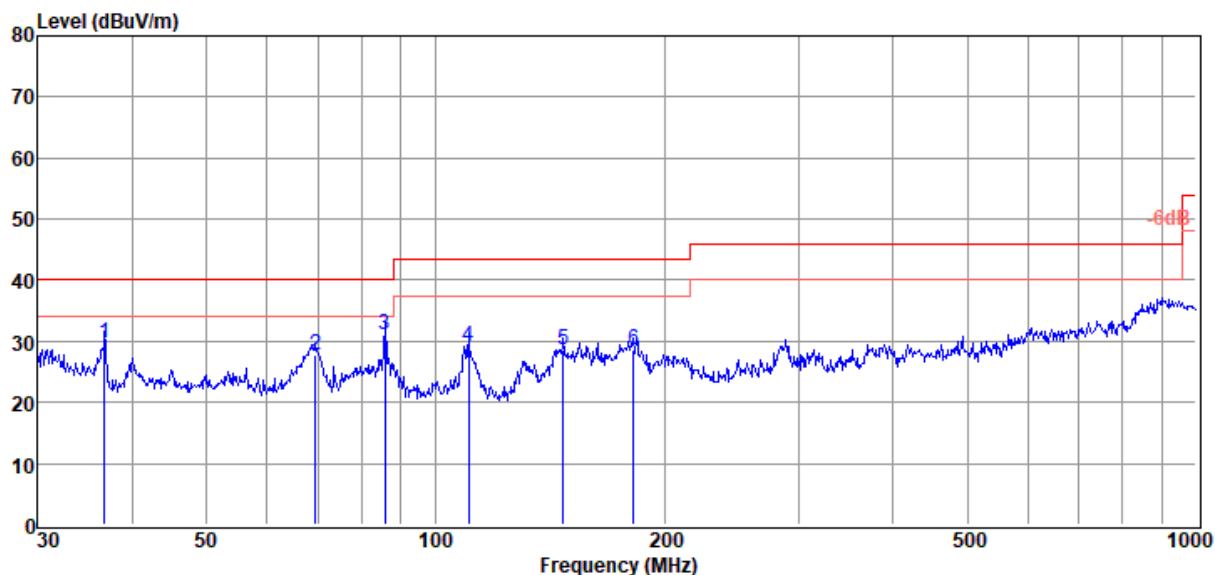

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	36.77	14.02	12.15	3.42	29.59	40.00	10.41	QP	VERTICAL
2	69.60	13.38	10.64	3.76	27.78	40.00	12.22	QP	VERTICAL
3	85.90	17.73	9.41	3.98	31.12	40.00	8.88	QP	VERTICAL
4	110.57	12.82	12.09	4.30	29.21	43.50	14.29	QP	VERTICAL
5	147.40	15.12	8.88	4.54	28.54	43.50	14.96	QP	VERTICAL
6	181.92	14.00	9.90	4.72	28.62	43.50	14.88	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 85

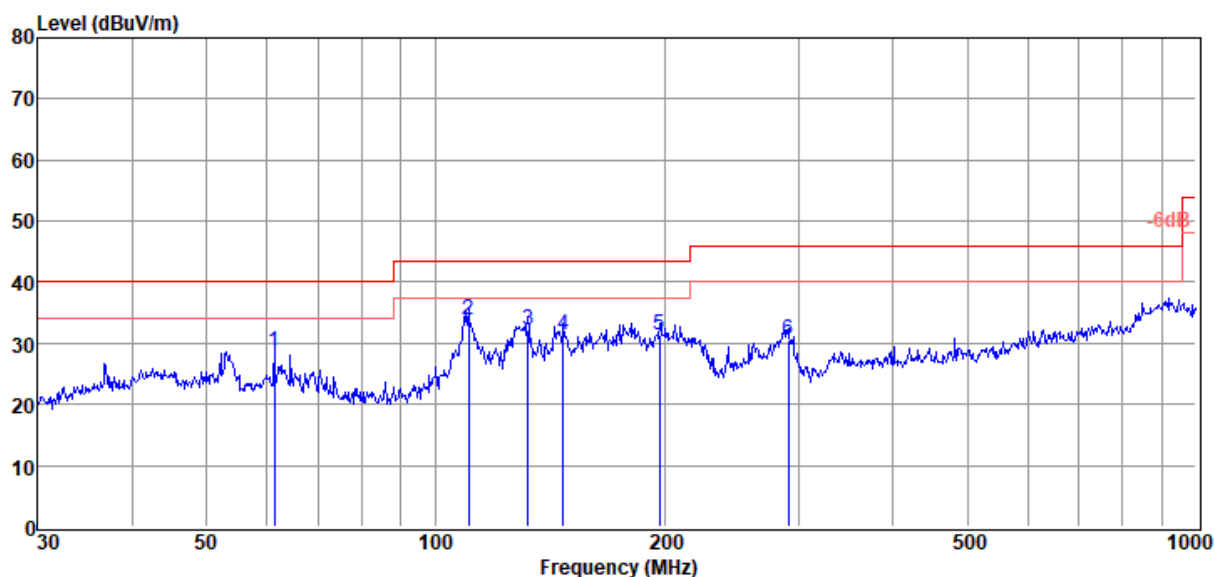

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	61.35	11.83	13.03	3.68	28.54	40.00	11.46	QP	VERTICAL
2	110.57	17.32	12.09	4.30	33.71	43.50	9.79	QP	VERTICAL
3	132.22	18.80	8.81	4.44	32.05	43.50	11.45	QP	VERTICAL
4	147.40	17.82	8.88	4.54	31.24	43.50	12.26	QP	VERTICAL
5	197.20	15.43	11.06	4.80	31.29	43.50	12.21	QP	VERTICAL
6	291.04	11.54	13.38	5.47	30.39	46.00	15.61	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 86

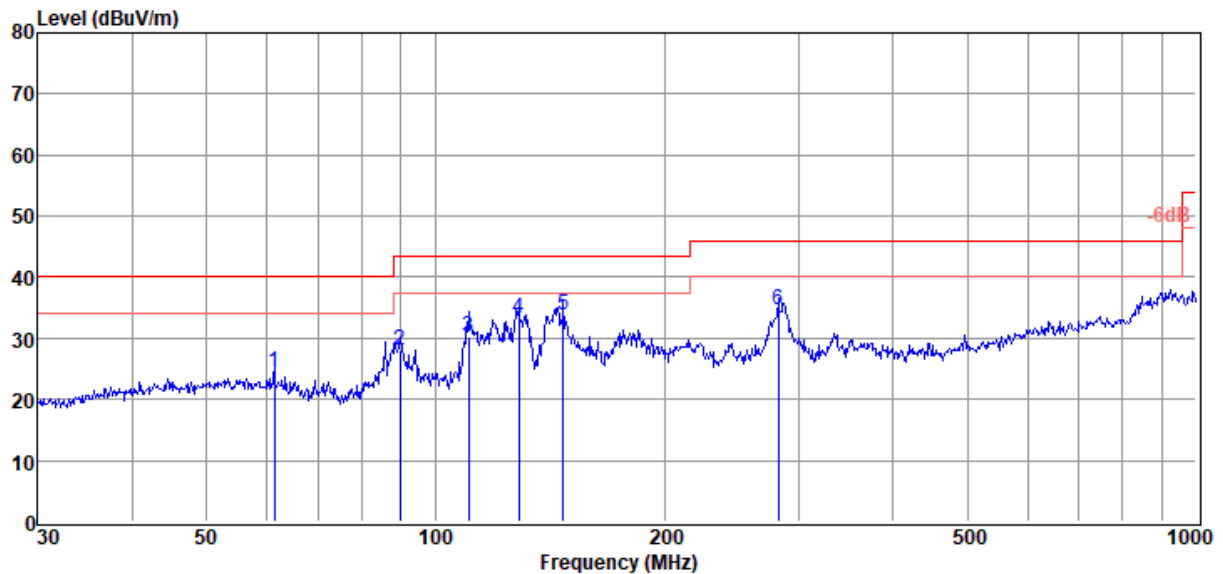

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	61.35	7.64	13.03	3.68	24.35	40.00	15.65	QP	HORIZONTAL
2	89.91	14.10	9.76	4.05	27.91	43.50	15.59	QP	HORIZONTAL
3	110.57	13.88	12.09	4.30	30.27	43.50	13.23	QP	HORIZONTAL
4	128.56	19.71	9.12	4.42	33.25	43.50	10.25	QP	HORIZONTAL
5	147.40	20.50	8.88	4.54	33.92	43.50	9.58	QP	HORIZONTAL
6	282.00	16.13	13.08	5.42	34.63	46.00	11.37	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 87

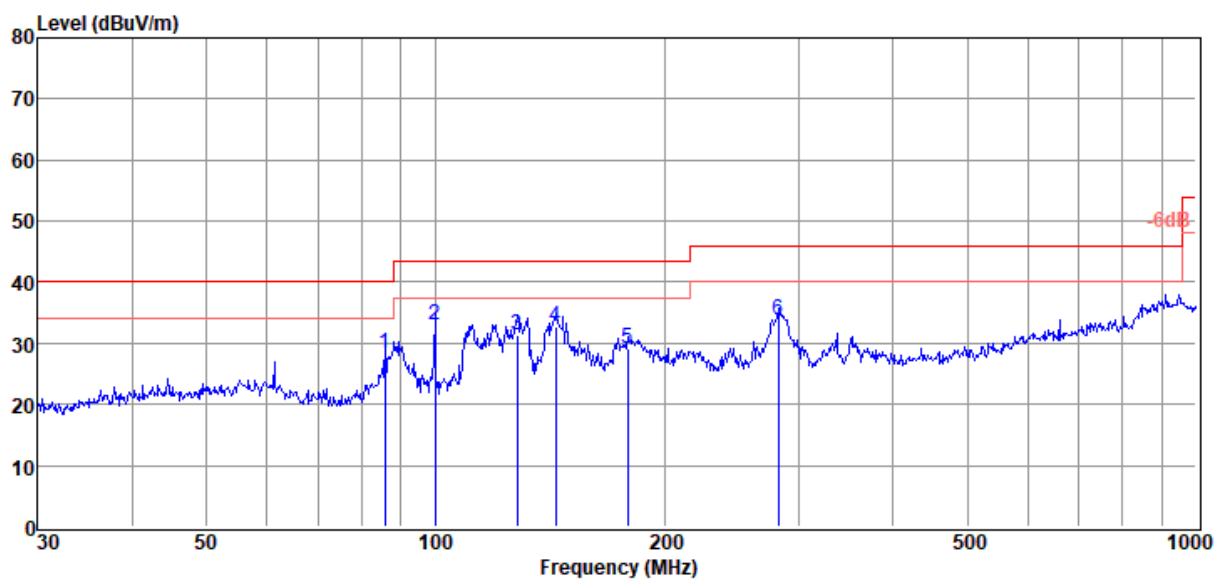

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	14.96	9.41	3.98	28.35	40.00	11.65	QP	HORIZONTAL
2	99.88	17.00	11.78	4.23	33.01	43.50	10.49	QP	HORIZONTAL
3	128.11	17.56	9.34	4.42	31.32	43.50	12.18	QP	HORIZONTAL
4	143.83	18.82	9.50	4.52	32.84	43.50	10.66	QP	HORIZONTAL
5	178.76	14.42	9.95	4.70	29.07	43.50	14.43	QP	HORIZONTAL
6	282.00	15.29	13.08	5.42	33.79	46.00	12.21	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 88

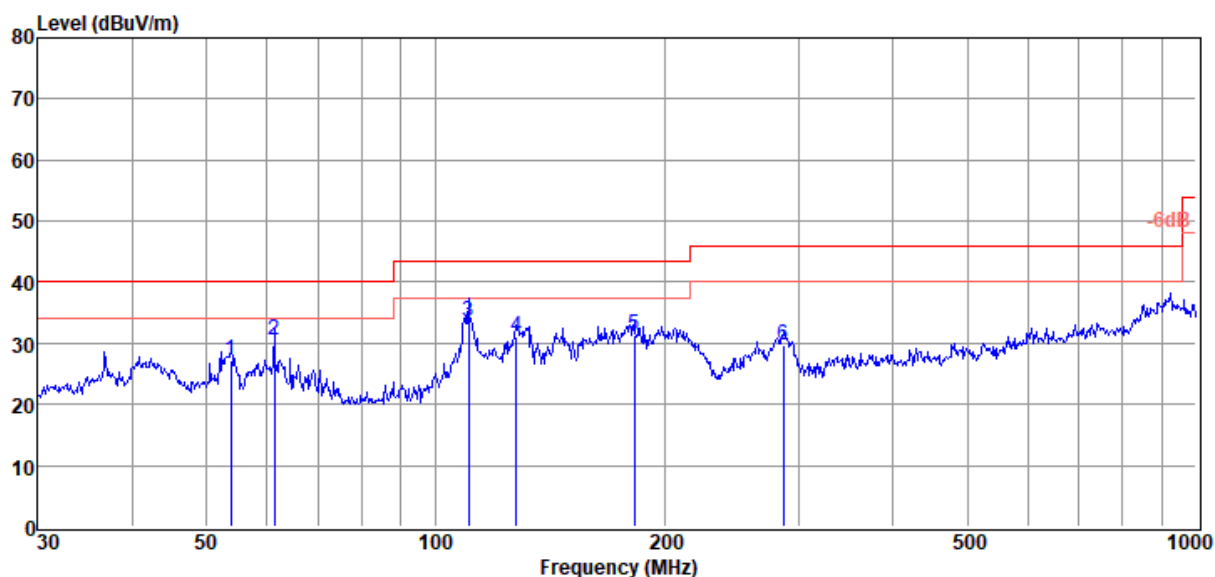

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	53.88	10.31	13.26	3.60	27.17	40.00	12.83	QP	VERTICAL
2	61.35	13.75	13.03	3.68	30.46	40.00	9.54	QP	VERTICAL
3	110.57	17.24	12.09	4.30	33.63	43.50	9.87	QP	VERTICAL
4	127.66	17.08	9.53	4.41	31.02	43.50	12.48	QP	VERTICAL
5	182.56	16.79	9.90	4.72	31.41	43.50	12.09	QP	VERTICAL
6	286.98	11.06	13.24	5.45	29.75	46.00	16.25	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:20.7°C,Humi:59.8%

Antenna/Distance : 2023 VULB 9163 #1/3m/VERTICAL

Memo : The second: FG4CELL21700GP

Data: 89

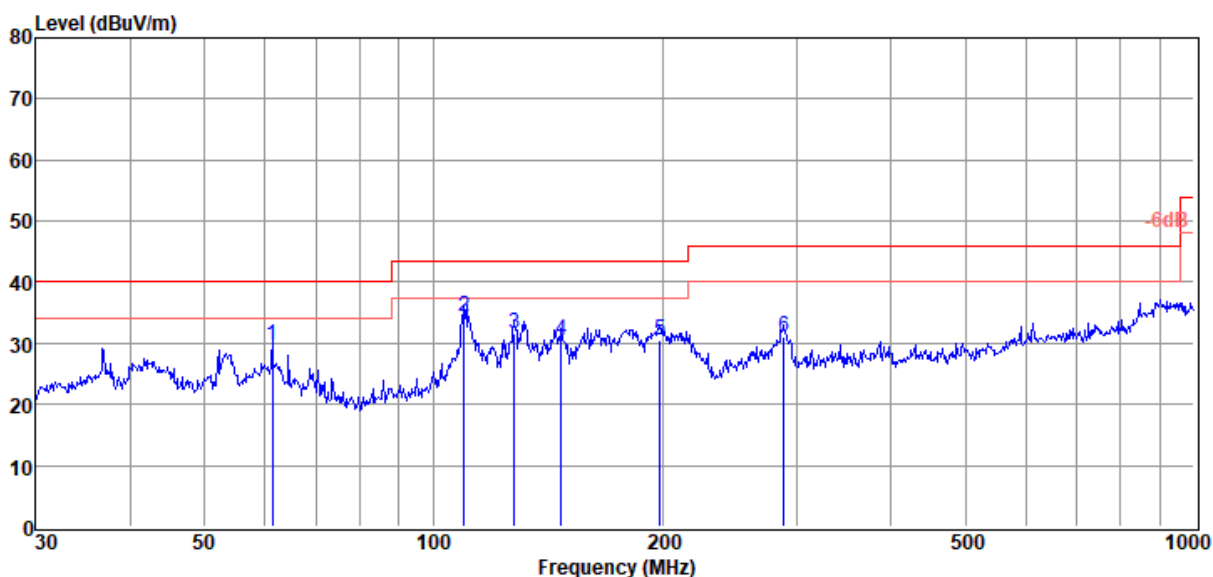

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	61.35	13.10	13.03	3.68	29.81	40.00	10.19	QP	VERTICAL
2	109.80	17.76	12.26	4.29	34.31	43.50	9.19	QP	VERTICAL
3	127.66	17.78	9.53	4.41	31.72	43.50	11.78	QP	VERTICAL
4	147.40	17.08	8.88	4.54	30.50	43.50	13.00	QP	VERTICAL
5	198.59	14.48	11.36	4.80	30.64	43.50	12.86	QP	VERTICAL
6	289.00	12.25	13.28	5.46	30.99	46.00	15.01	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 90

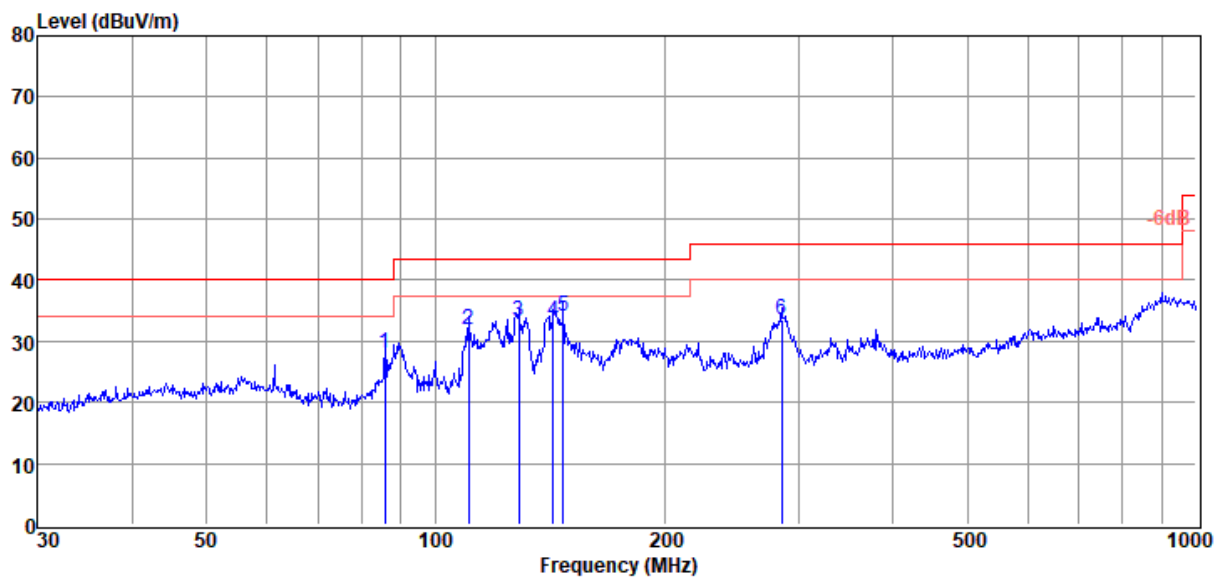

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	85.90	14.76	9.41	3.98	28.15	40.00	11.85	QP	HORIZONTAL
2	110.57	15.59	12.09	4.30	31.98	43.50	11.52	QP	HORIZONTAL
3	128.56	19.66	9.12	4.42	33.20	43.50	10.30	QP	HORIZONTAL
4	142.82	19.70	8.98	4.51	33.19	43.50	10.31	QP	HORIZONTAL
5	147.40	20.78	8.88	4.54	34.20	43.50	9.30	QP	HORIZONTAL
6	284.98	14.80	13.20	5.44	33.44	46.00	12.56	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 91

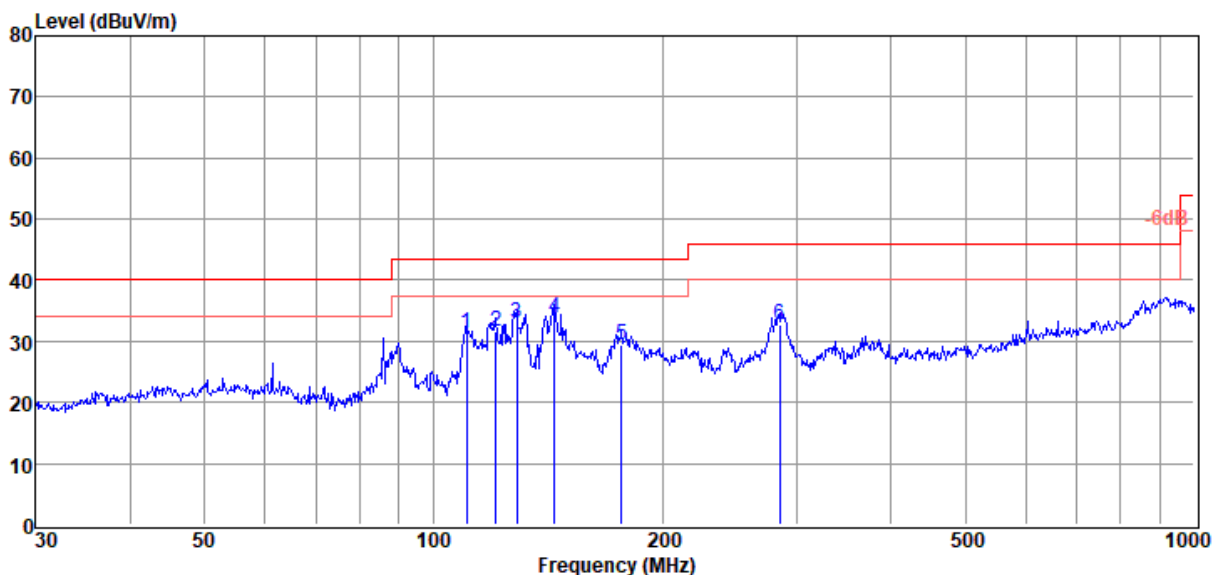

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	110.57	15.08	12.09	4.30	31.47	43.50	12.03	QP	HORIZONTAL
2	120.70	17.01	10.32	4.37	31.70	43.50	11.80	QP	HORIZONTAL
3	128.56	19.58	9.12	4.42	33.12	43.50	10.38	QP	HORIZONTAL
4	144.34	19.99	9.40	4.52	33.91	43.50	9.59	QP	HORIZONTAL
5	176.89	14.78	10.08	4.69	29.55	43.50	13.95	QP	HORIZONTAL
6	284.98	14.02	13.20	5.44	32.66	46.00	13.34	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\FCC RE-1.EM6

Test Date : 2025-08-30**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:20.7°C,Humi:59.8%**Antenna/Distance** : 2023 VULB 9163 #1/3m/VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 92

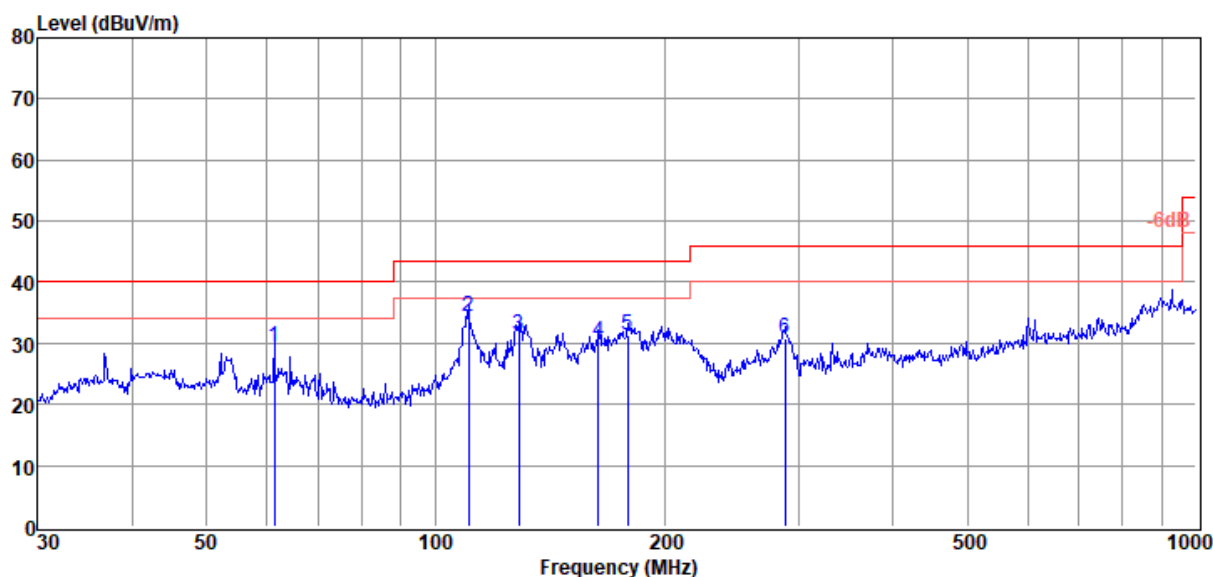

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	61.35	12.74	13.03	3.68	29.45	40.00	10.55	QP	VERTICAL
2	110.57	17.98	12.09	4.30	34.37	43.50	9.13	QP	VERTICAL
3	128.56	17.91	9.12	4.42	31.45	43.50	12.05	QP	VERTICAL
4	163.76	15.87	9.60	4.63	30.10	43.50	13.40	QP	VERTICAL
5	178.76	16.64	9.95	4.70	31.29	43.50	12.21	QP	VERTICAL
6	287.99	12.04	13.26	5.45	30.75	46.00	15.25	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 53

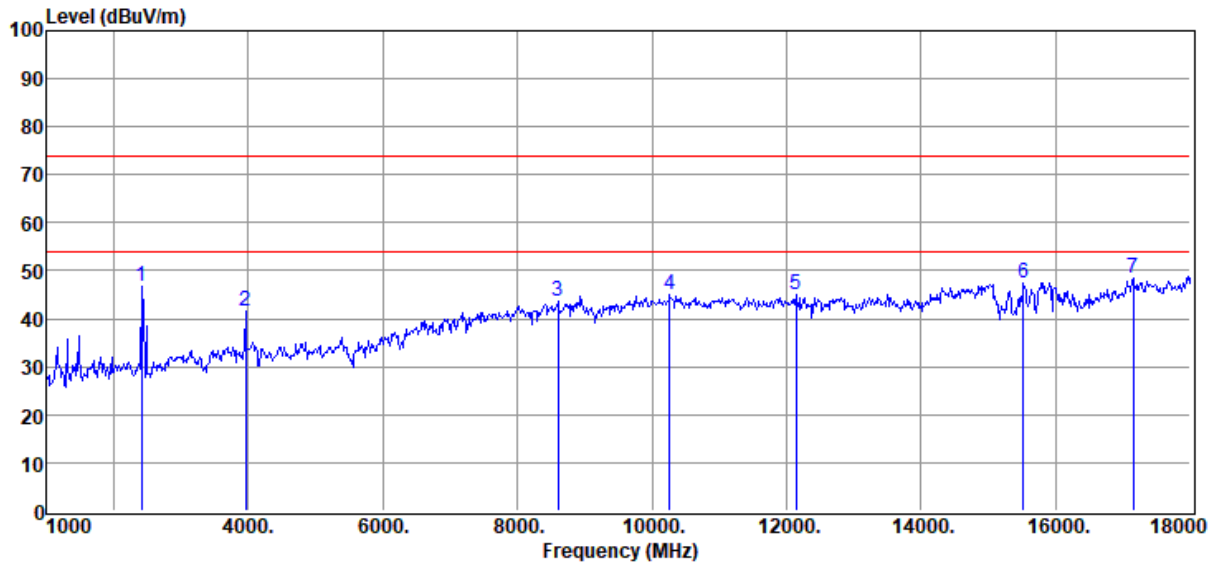

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	68.95	27.20	53.89	4.33	46.59	Carrier frequency			VERTICAL
2	3958.00	60.09	30.66	54.10	4.96	41.61	74.00	-32.39	Peak	VERTICAL
3	8599.00	51.50	38.50	54.09	7.69	43.60	74.00	-30.40	Peak	VERTICAL
4	10265.00	50.13	39.63	52.91	8.21	45.06	74.00	-28.94	Peak	VERTICAL
5	12135.00	49.07	39.44	51.94	8.45	45.02	74.00	-28.98	Peak	VERTICAL
6	15518.00	48.37	39.65	51.91	11.21	47.32	74.00	-26.68	Peak	VERTICAL
7	17150.00	43.79	41.65	52.44	15.47	48.47	74.00	-25.53	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 54

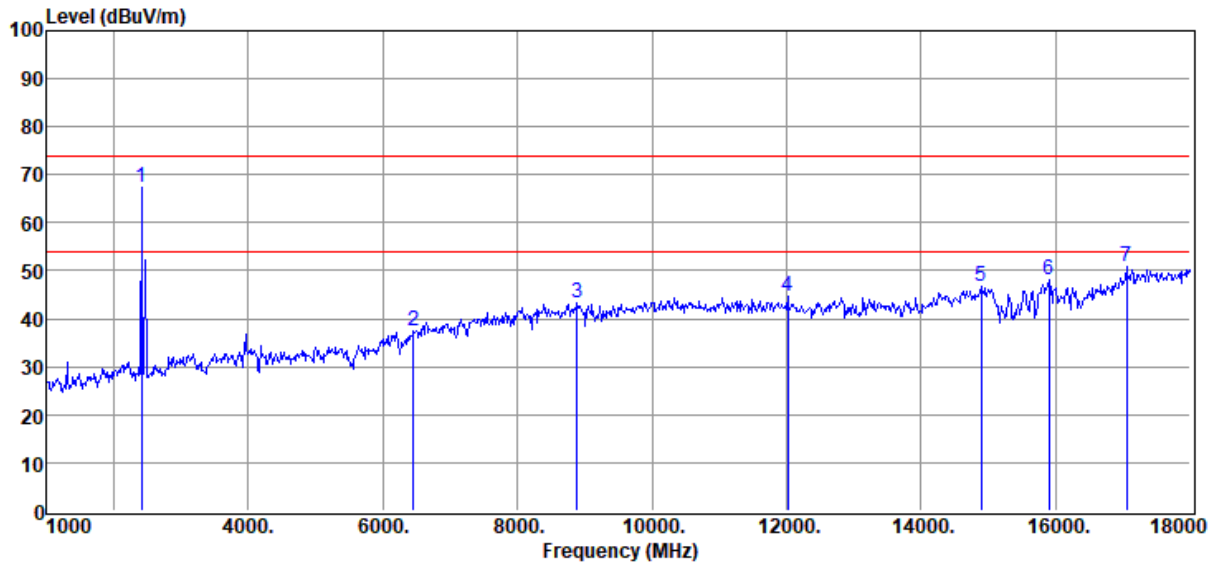

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	89.66	27.20	53.89	4.33	67.30	Carrier frequency			HORIZONTAL
2	6457.00	51.55	34.80	55.00	6.24	37.59	74.00	-36.41	Peak	HORIZONTAL
3	8888.00	50.60	38.60	53.81	7.95	43.34	74.00	-30.66	Peak	HORIZONTAL
4	12016.00	48.66	39.40	51.73	8.42	44.75	74.00	-29.25	Peak	HORIZONTAL
5	14889.00	48.95	40.99	52.93	9.87	46.88	74.00	-27.12	Peak	HORIZONTAL
6	15892.00	48.39	39.12	51.36	12.07	48.22	74.00	-25.78	Peak	HORIZONTAL
7	17048.00	46.21	41.49	52.48	15.49	50.71	74.00	-23.29	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 55

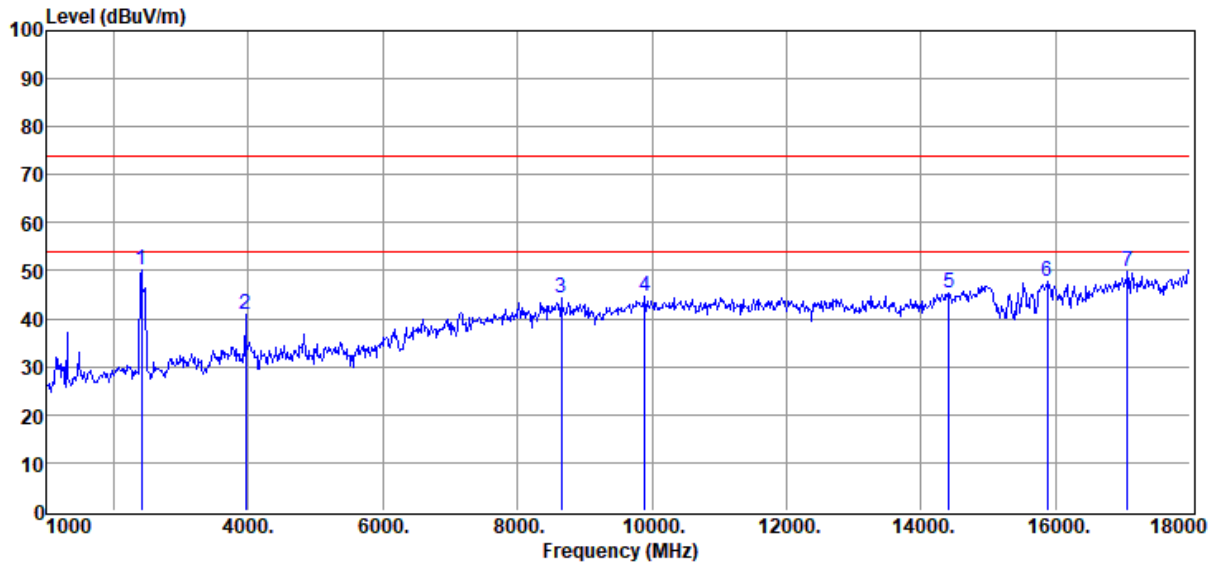

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	72.45	27.20	53.89	4.33	50.09	Carrier frequency			HORIZONTAL
2	3958.00	59.53	30.66	54.10	4.96	41.05	74.00	-32.95	Peak	HORIZONTAL
3	8650.00	52.21	38.50	54.04	7.74	44.41	74.00	-29.59	Peak	HORIZONTAL
4	9891.00	50.48	39.08	53.16	8.28	44.68	74.00	-29.32	Peak	HORIZONTAL
5	14413.00	49.19	40.69	53.92	9.41	45.37	74.00	-28.63	Peak	HORIZONTAL
6	15875.00	47.80	39.17	51.38	12.03	47.62	74.00	-26.38	Peak	HORIZONTAL
7	17065.00	45.11	41.56	52.47	15.49	49.69	74.00	-24.31	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 56

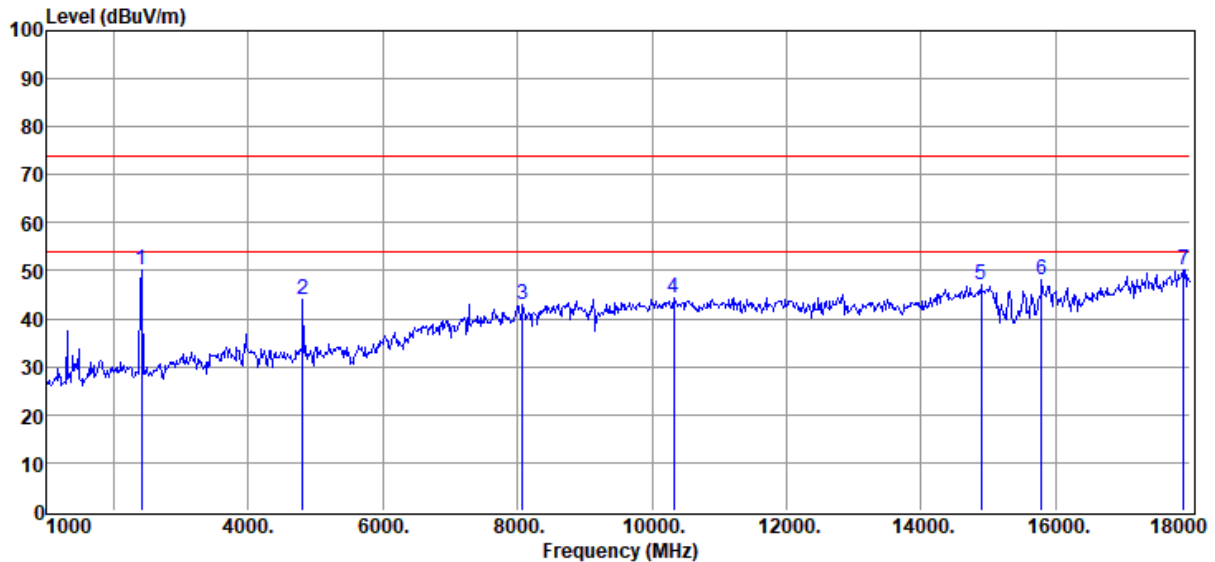

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	72.41	27.20	53.89	4.33	50.05	Carrier frequency			VERTICAL
2	4808.00	60.96	31.67	54.43	5.81	44.01	74.00	-29.99	Peak	VERTICAL
3	8072.00	52.31	38.17	54.62	7.19	43.05	74.00	-30.95	Peak	VERTICAL
4	10316.00	49.19	39.68	52.87	8.19	44.19	74.00	-29.81	Peak	VERTICAL
5	14889.00	49.04	40.99	52.93	9.87	46.97	74.00	-27.03	Peak	VERTICAL
6	15790.00	48.45	39.36	51.51	11.84	48.14	74.00	-25.86	Peak	VERTICAL
7	17898.00	41.94	44.95	52.14	15.35	50.10	74.00	-23.90	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 57

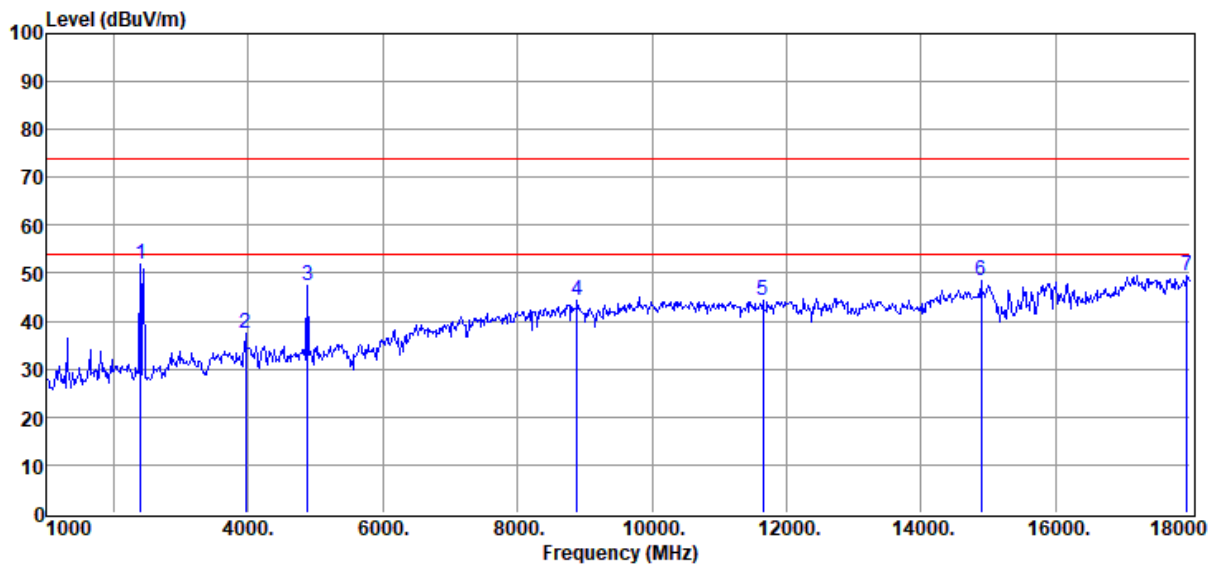

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2402.00	74.27	27.20	53.89	4.32	51.90	Carrier frequency			VERTICAL
2	3958.00	55.92	30.66	54.10	4.96	37.44	74.00	-36.56	Peak	VERTICAL
3	4876.00	64.50	31.60	54.45	5.87	47.52	74.00	-26.48	Peak	VERTICAL
4	8888.00	51.52	38.60	53.81	7.95	44.26	74.00	-29.74	Peak	VERTICAL
5	11642.00	48.63	39.30	51.94	8.25	44.24	74.00	-29.76	Peak	VERTICAL
6	14889.00	50.37	40.99	52.93	9.87	48.30	74.00	-25.70	Peak	VERTICAL
7	17949.00	40.71	45.59	52.12	15.34	49.52	74.00	-24.48	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 58

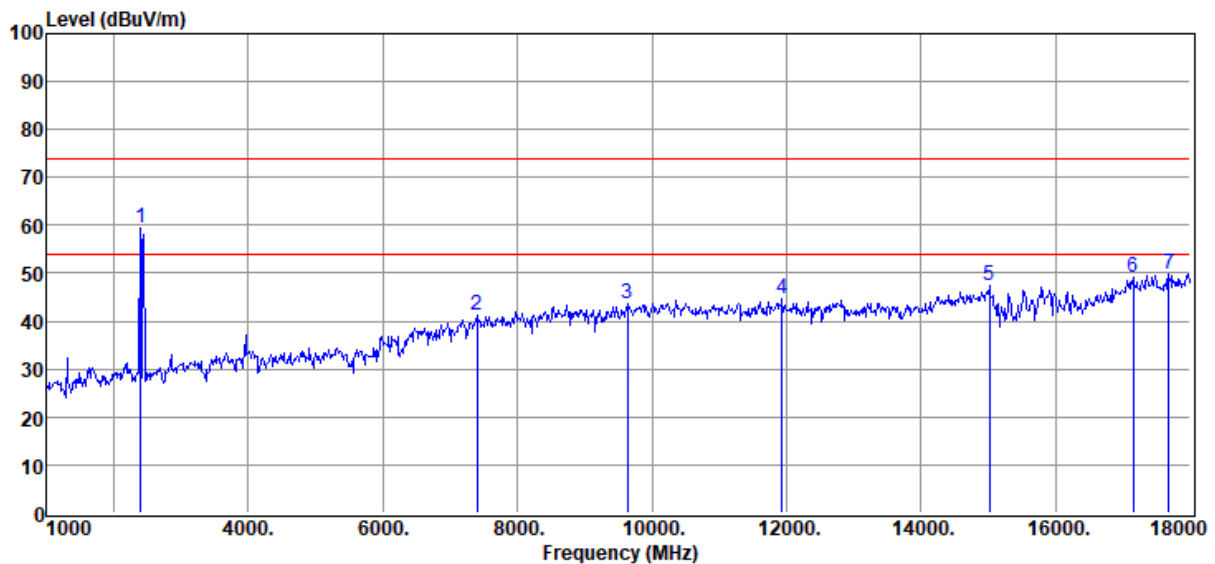

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2402.00	81.77	27.20	53.89	4.32	59.40	Carrier frequency			HORIZONTAL
2	7392.00	52.32	37.09	54.82	6.73	41.32	74.00	-32.68	Peak	HORIZONTAL
3	9636.00	50.41	38.29	53.31	8.22	43.61	74.00	-30.39	Peak	HORIZONTAL
4	11931.00	48.48	39.40	51.75	8.38	44.51	74.00	-29.49	Peak	HORIZONTAL
5	15008.00	49.08	40.88	52.69	9.99	47.26	74.00	-26.74	Peak	HORIZONTAL
6	17150.00	44.44	41.65	52.44	15.47	49.12	74.00	-24.88	Peak	HORIZONTAL
7	17677.00	44.38	42.31	52.23	15.38	49.84	74.00	-24.16	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 59

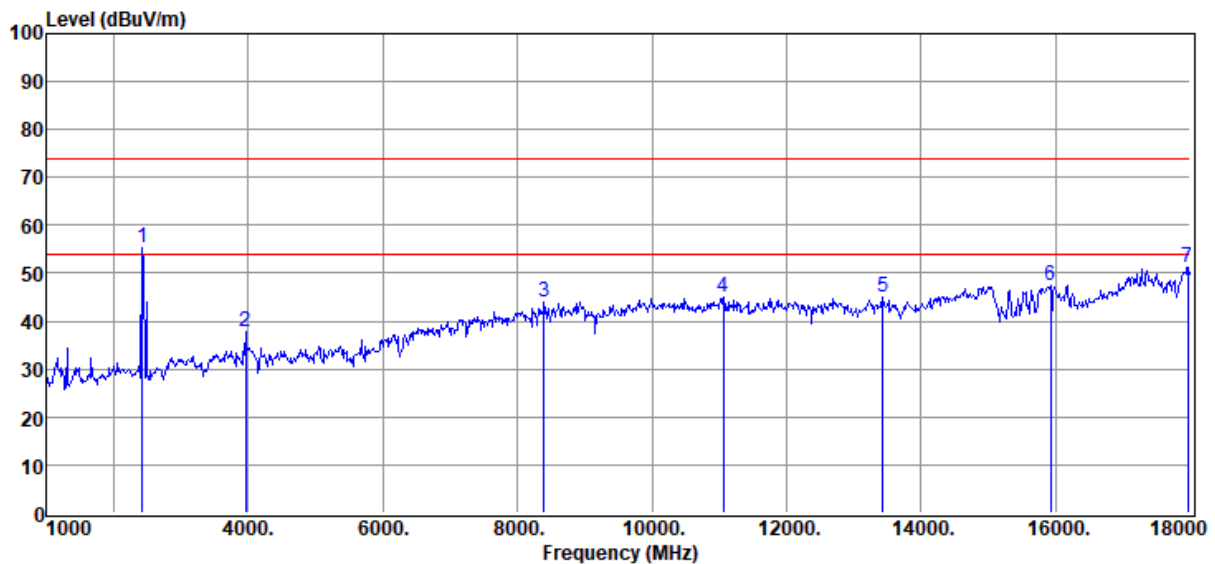

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	77.77	27.20	53.90	4.35	55.42	Carrier frequency			HORIZONTAL
2	3958.00	56.41	30.66	54.10	4.96	37.93	74.00	-36.07	Peak	HORIZONTAL
3	8395.00	52.53	38.39	54.29	7.50	44.13	74.00	-29.87	Peak	HORIZONTAL
4	11064.00	49.71	39.61	52.35	7.98	44.95	74.00	-29.05	Peak	HORIZONTAL
5	13427.00	50.20	39.93	54.01	8.84	44.96	74.00	-29.04	Peak	HORIZONTAL
6	15926.00	47.64	39.00	51.31	12.15	47.48	74.00	-26.52	Peak	HORIZONTAL
7	17966.00	42.33	45.79	52.11	15.34	51.35	74.00	-22.65	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 60

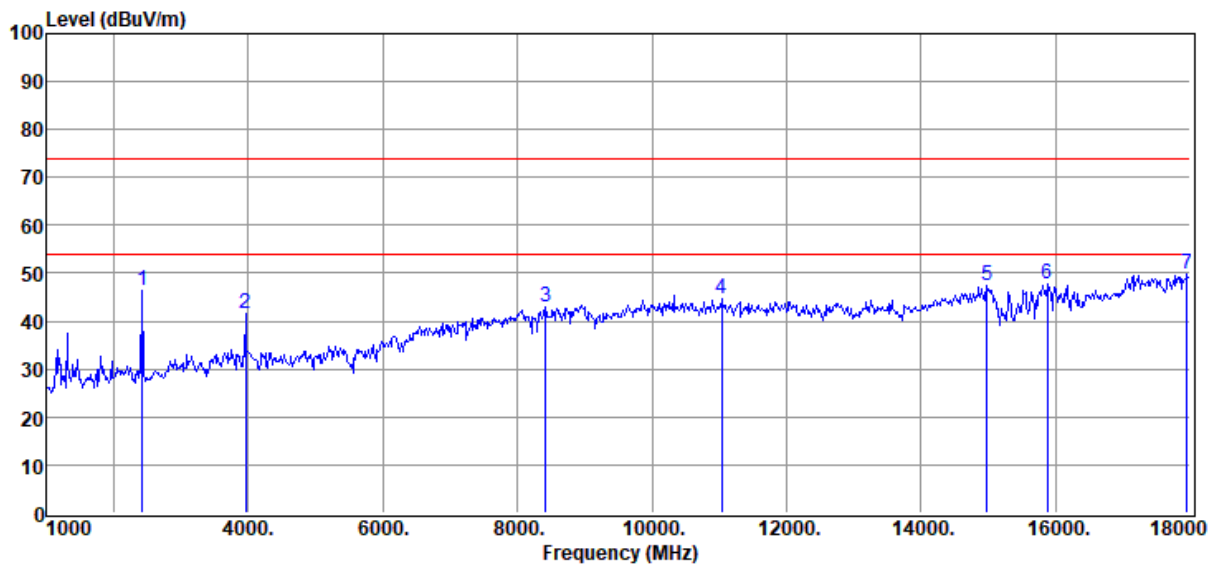

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	68.69	27.20	53.90	4.35	46.34	Carrier frequency			VERTICAL
2	3958.00	60.15	30.66	54.10	4.96	41.67	74.00	-32.33	Peak	VERTICAL
3	8412.00	51.25	38.40	54.27	7.52	42.90	74.00	-31.10	Peak	VERTICAL
4	11030.00	49.48	39.71	52.38	7.96	44.77	74.00	-29.23	Peak	VERTICAL
5	14974.00	49.33	40.93	52.75	9.95	47.46	74.00	-26.54	Peak	VERTICAL
6	15875.00	48.12	39.17	51.38	12.03	47.94	74.00	-26.06	Peak	VERTICAL
7	17949.00	40.96	45.59	52.12	15.34	49.77	74.00	-24.23	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 61

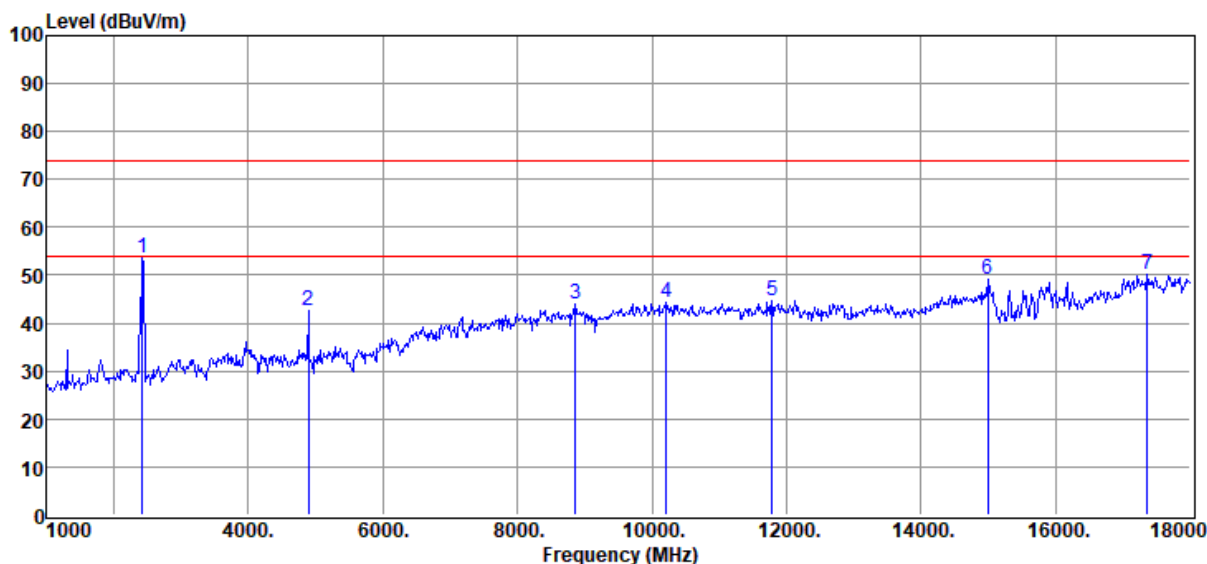

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	76.05	27.20	53.90	4.35	53.70	Carrier frequency			VERTICAL
2	4893.00	59.52	31.67	54.46	5.89	42.62	74.00	-31.38	Peak	VERTICAL
3	8854.00	51.14	38.60	53.84	7.92	43.82	74.00	-30.18	Peak	VERTICAL
4	10214.00	49.59	39.53	52.94	8.23	44.41	74.00	-29.59	Peak	VERTICAL
5	11778.00	48.89	39.38	51.85	8.31	44.73	74.00	-29.27	Peak	VERTICAL
6	14991.00	50.86	40.91	52.72	9.96	49.01	74.00	-24.99	Peak	VERTICAL
7	17354.00	45.55	41.69	52.36	15.44	50.32	74.00	-23.68	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 62

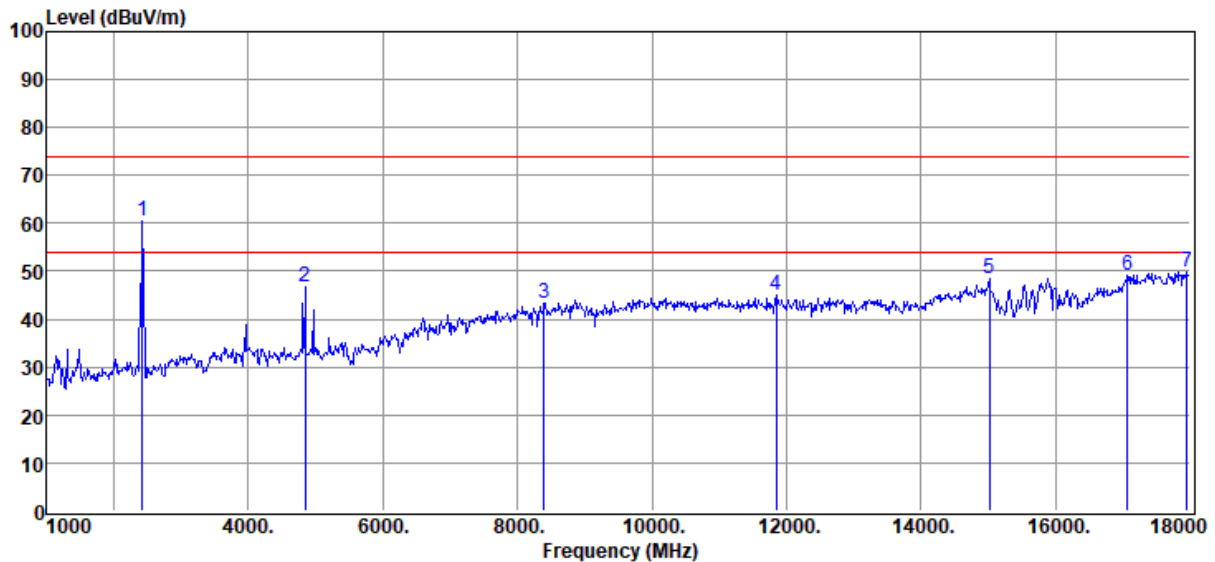

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	83.00	27.20	53.90	4.35	60.65	Carrier frequency			HORIZONTAL
2	4842.00	63.95	31.53	54.44	5.84	46.88	74.00	-27.12	Peak	HORIZONTAL
3	8395.00	51.67	38.39	54.29	7.50	43.27	74.00	-30.73	Peak	HORIZONTAL
4	11846.00	48.92	39.40	51.80	8.34	44.86	74.00	-29.14	Peak	HORIZONTAL
5	15008.00	50.20	40.88	52.69	9.99	48.38	74.00	-25.62	Peak	HORIZONTAL
6	17065.00	44.43	41.56	52.47	15.49	49.01	74.00	-24.99	Peak	HORIZONTAL
7	17949.00	40.91	45.59	52.12	15.34	49.72	74.00	-24.28	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 63

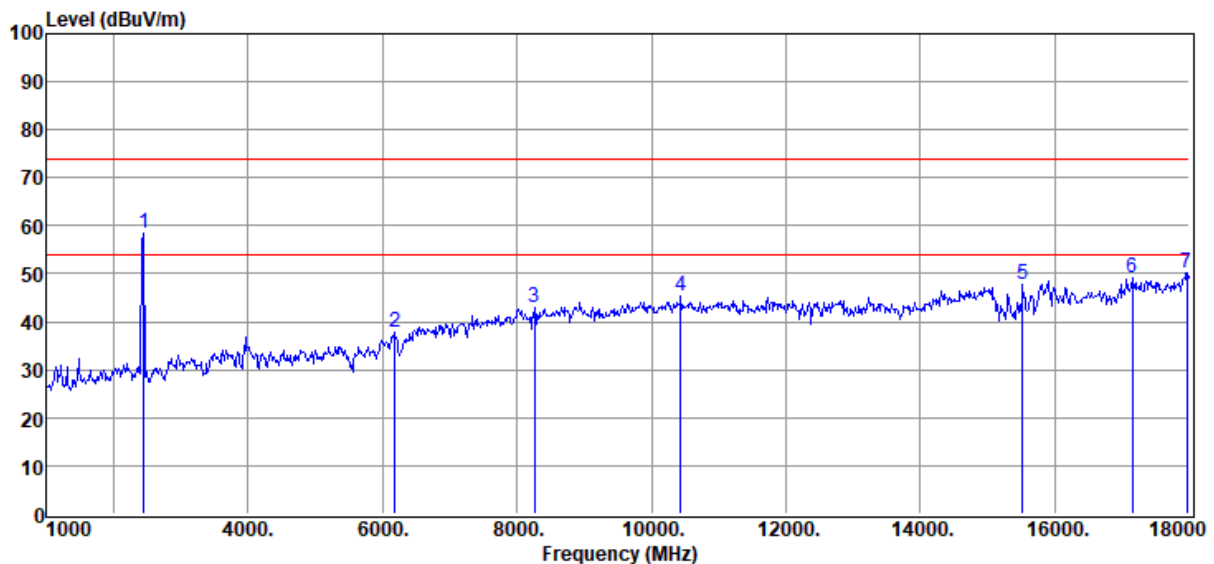

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2445.00	80.63	27.20	53.90	4.37	58.30	Carrier frequency			HORIZONTAL
2	6185.00	52.66	34.13	55.06	6.12	37.85	74.00	-36.15	Peak	HORIZONTAL
3	8259.00	51.78	38.20	54.43	7.37	42.92	74.00	-31.08	Peak	HORIZONTAL
4	10435.00	50.23	39.60	52.79	8.15	45.19	74.00	-28.81	Peak	HORIZONTAL
5	15518.00	48.81	39.65	51.91	11.21	47.76	74.00	-26.24	Peak	HORIZONTAL
6	17150.00	44.29	41.65	52.44	15.47	48.97	74.00	-25.03	Peak	HORIZONTAL
7	17966.00	41.20	45.79	52.11	15.34	50.22	74.00	-23.78	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + 5V/1A load +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 64

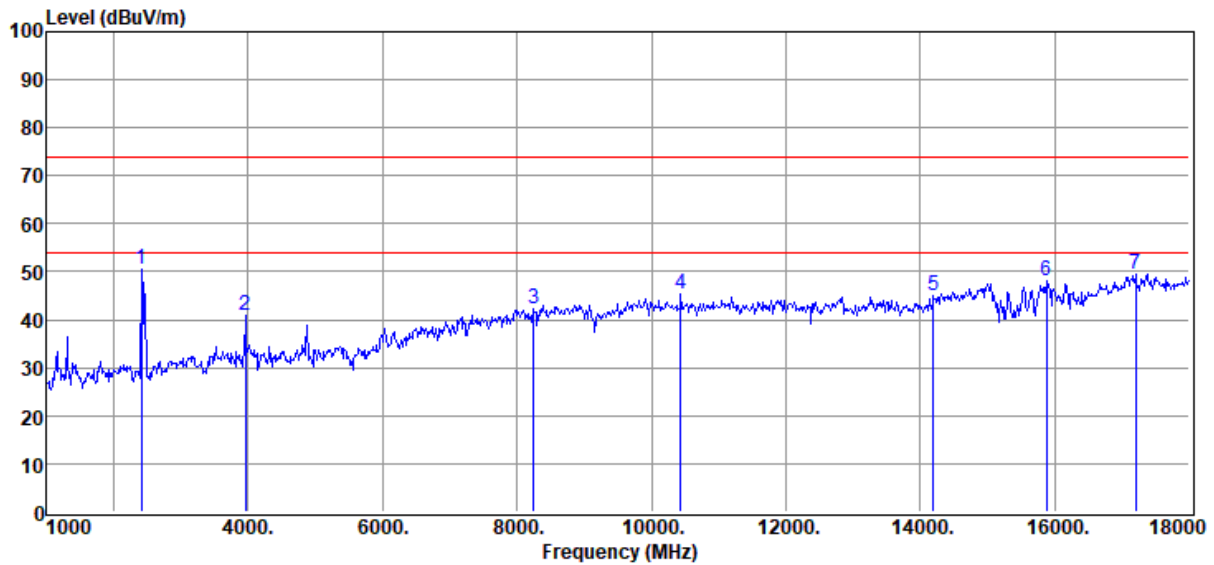

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	72.84	27.20	53.89	4.33	50.48	Carrier frequency			VERTICAL
2	3958.00	59.52	30.66	54.10	4.96	41.04	74.00	-32.96	Peak	VERTICAL
3	8242.00	51.35	38.14	54.45	7.36	42.40	74.00	-31.60	Peak	VERTICAL
4	10435.00	50.48	39.60	52.79	8.15	45.44	74.00	-28.56	Peak	VERTICAL
5	14192.00	49.33	40.78	54.39	9.19	44.91	74.00	-29.09	Peak	VERTICAL
6	15875.00	48.33	39.17	51.38	12.03	48.15	74.00	-25.85	Peak	VERTICAL
7	17201.00	44.88	41.60	52.42	15.47	49.53	74.00	-24.47	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Bluetooth + TWS + 5V/1A load + MIC*2
+ Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 65

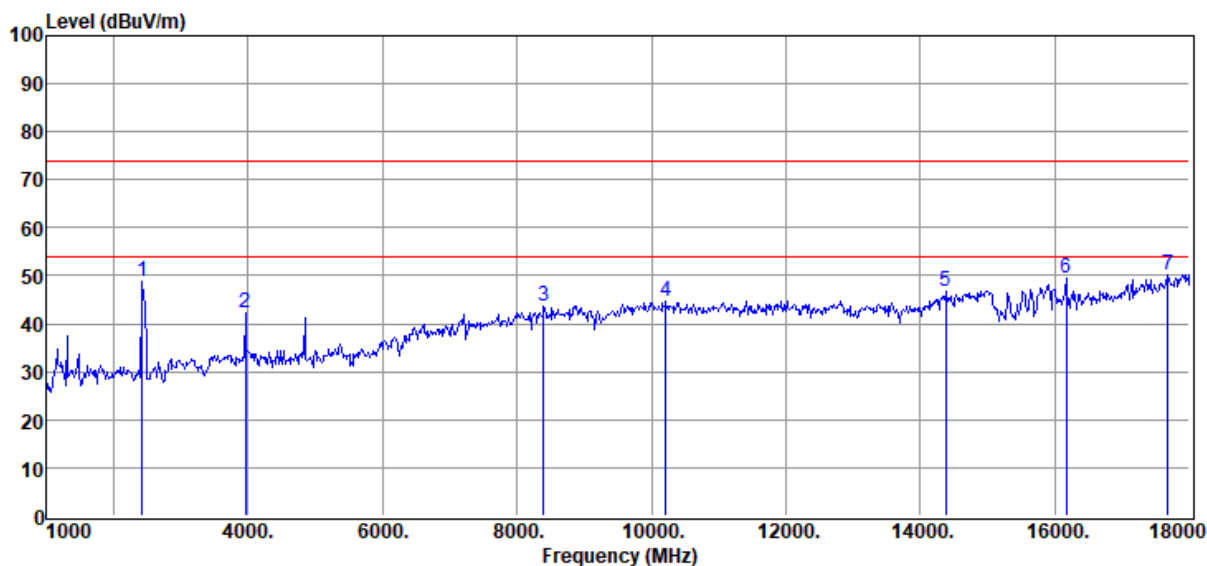

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	71.21	27.20	53.90	4.35	48.86	Carrier frequency			VERTICAL
2	3958.00	60.76	30.66	54.10	4.96	42.28	74.00	-31.72	Peak	VERTICAL
3	8395.00	52.13	38.39	54.29	7.50	43.73	74.00	-30.27	Peak	VERTICAL
4	10214.00	49.91	39.53	52.94	8.23	44.73	74.00	-29.27	Peak	VERTICAL
5	14379.00	50.58	40.70	53.99	9.38	46.67	74.00	-27.33	Peak	VERTICAL
6	16164.00	49.06	38.84	51.42	12.85	49.33	74.00	-24.67	Peak	VERTICAL
7	17677.00	44.76	42.31	52.23	15.38	50.22	74.00	-23.78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Bluetooth + TWS + 5V/1A load + MIC*2
+ Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 66

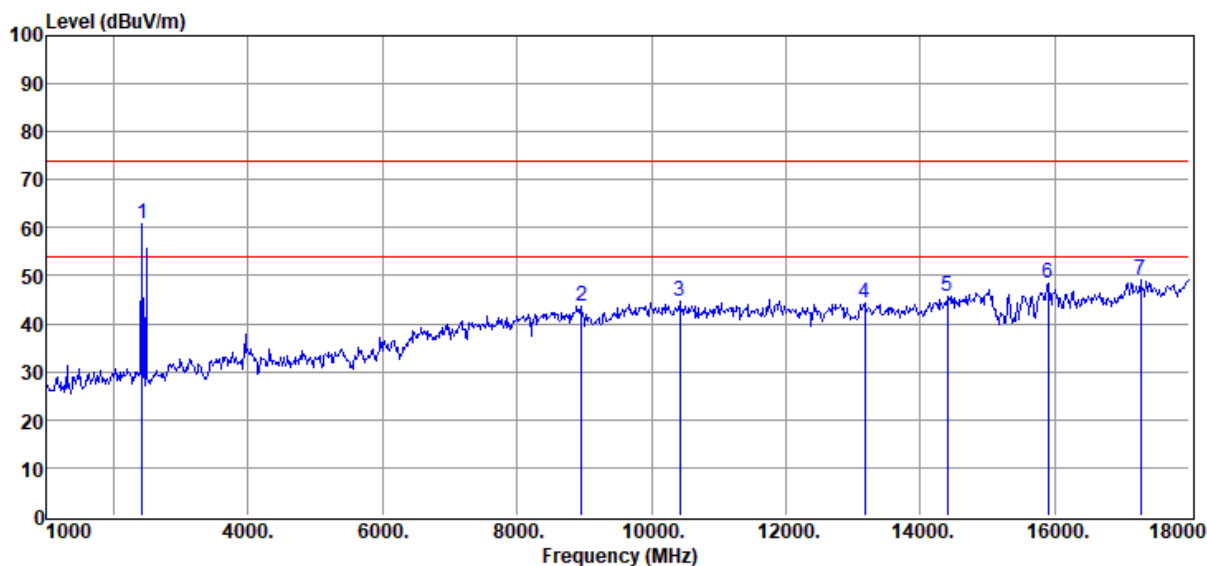

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	83.15	27.20	53.90	4.35	60.80	Carrier frequency			HORIZONTAL
2	8956.00	50.89	38.40	53.74	8.01	43.56	74.00	-30.44	Peak	HORIZONTAL
3	10418.00	49.66	39.60	52.80	8.16	44.62	74.00	-29.38	Peak	HORIZONTAL
4	13172.00	48.95	40.30	53.65	8.77	44.37	74.00	-29.63	Peak	HORIZONTAL
5	14396.00	49.61	40.70	53.95	9.39	45.75	74.00	-28.25	Peak	HORIZONTAL
6	15892.00	48.49	39.12	51.36	12.07	48.32	74.00	-25.68	Peak	HORIZONTAL
7	17269.00	44.20	41.74	52.39	15.45	49.00	74.00	-25.00	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Bluetooth + 5V/1A load + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 67

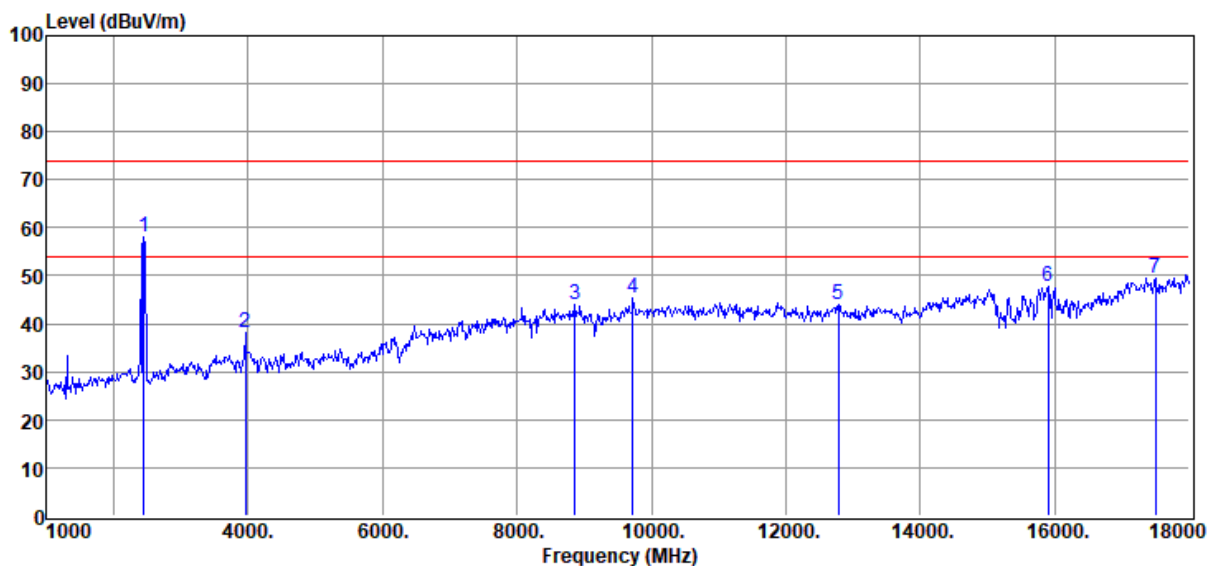

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2445.00	80.29	27.20	53.90	4.37	57.96	Carrier frequency			HORIZONTAL
2	3958.00	56.60	30.66	54.10	4.96	38.12	74.00	-35.88	Peak	HORIZONTAL
3	8854.00	51.25	38.60	53.84	7.92	43.93	74.00	-30.07	Peak	HORIZONTAL
4	9721.00	51.95	38.40	53.26	8.24	45.33	74.00	-28.67	Peak	HORIZONTAL
5	12781.00	48.40	39.94	53.04	8.65	43.95	74.00	-30.05	Peak	HORIZONTAL
6	15892.00	47.86	39.12	51.36	12.07	47.69	74.00	-26.31	Peak	HORIZONTAL
7	17490.00	44.43	42.05	52.30	15.42	49.60	74.00	-24.40	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Bluetooth + 5V/1A load + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 68

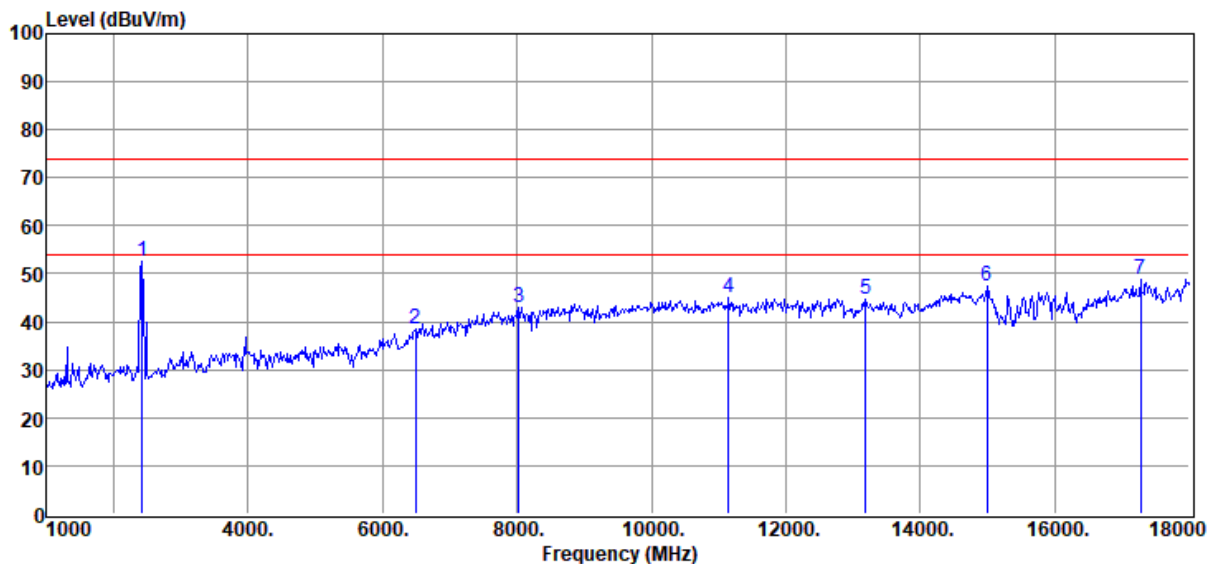

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	74.84	27.20	53.90	4.35	52.49	Carrier frequency			VERTICAL
2	6491.00	52.32	34.80	55.00	6.25	38.37	74.00	-35.63	Peak	VERTICAL
3	8021.00	52.31	38.18	54.68	7.14	42.95	74.00	-31.05	Peak	VERTICAL
4	11149.00	49.68	39.50	52.29	8.02	44.91	74.00	-29.09	Peak	VERTICAL
5	13189.00	49.16	40.30	53.67	8.77	44.56	74.00	-29.44	Peak	VERTICAL
6	14991.00	49.38	40.91	52.72	9.96	47.53	74.00	-26.47	Peak	VERTICAL
7	17269.00	44.07	41.74	52.39	15.45	48.87	74.00	-25.13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : USB disk Audio + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 69

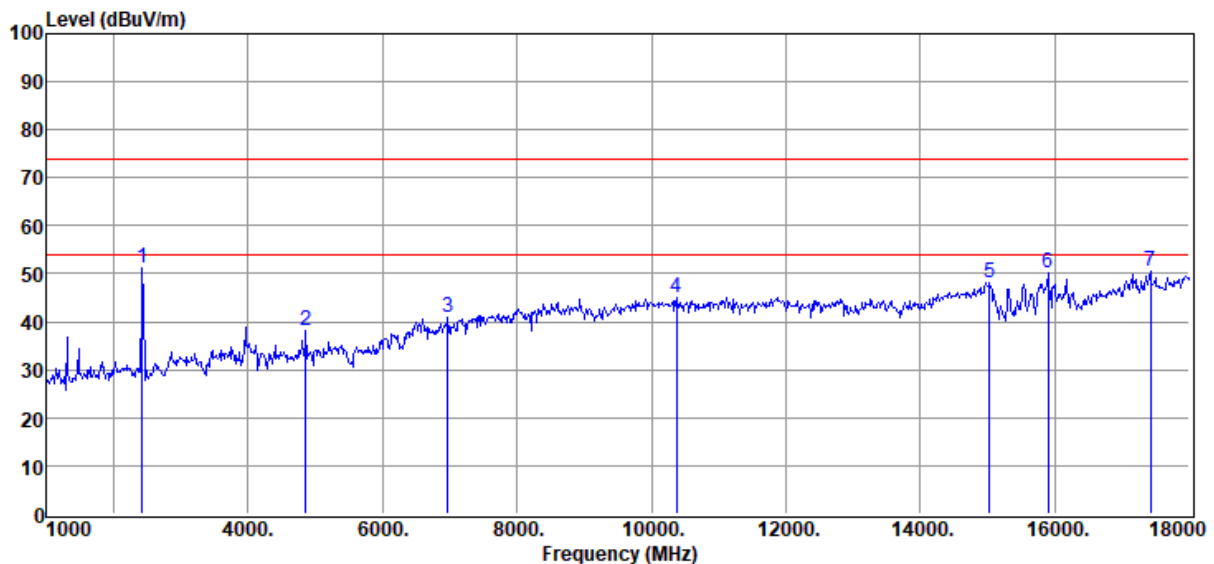

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2428.00	73.63	27.20	53.90	4.35	51.28	Carrier frequency			VERTICAL
2	4859.00	55.17	31.54	54.45	5.86	38.12	74.00	-35.88	Peak	VERTICAL
3	6967.00	53.31	36.10	54.91	6.45	40.95	74.00	-33.05	Peak	VERTICAL
4	10367.00	50.08	39.63	52.84	8.17	45.04	74.00	-28.96	Peak	VERTICAL
5	15025.00	49.95	40.85	52.66	10.03	48.17	74.00	-25.83	Peak	VERTICAL
6	15892.00	50.38	39.12	51.36	12.07	50.21	74.00	-23.79	Peak	VERTICAL
7	17422.00	45.60	41.71	52.33	15.43	50.41	74.00	-23.59	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : USB disk Audio + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 70

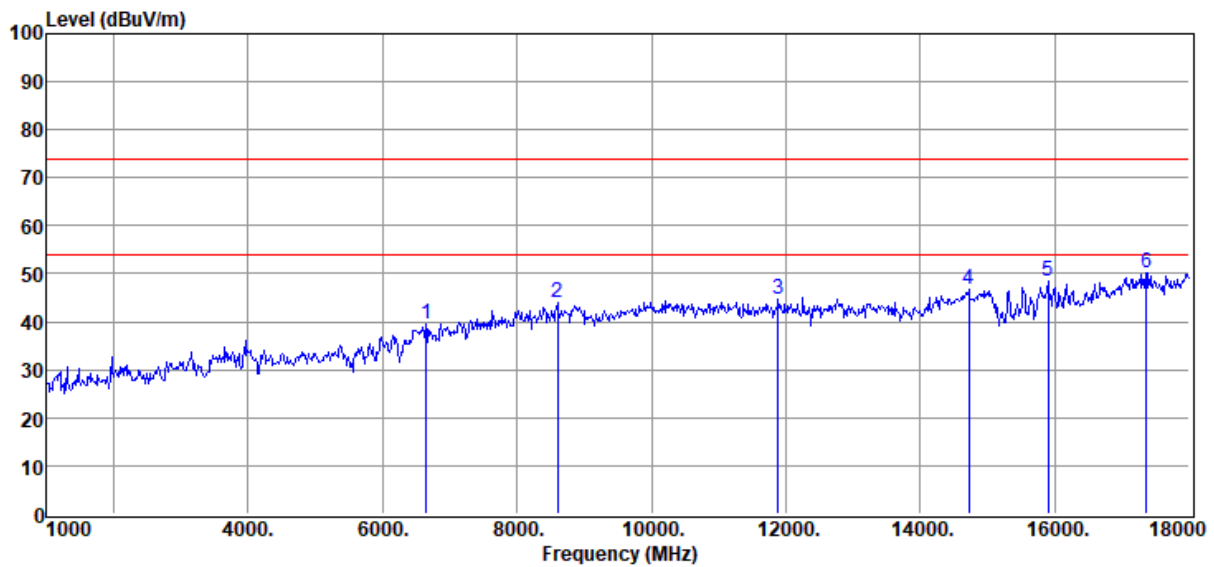

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6644.00	53.16	35.16	54.97	6.32	39.67	74.00	-34.33	Peak	HORIZONTAL
2	8599.00	51.74	38.50	54.09	7.69	43.84	74.00	-30.16	Peak	HORIZONTAL
3	11880.00	48.66	39.40	51.78	8.36	44.64	74.00	-29.36	Peak	HORIZONTAL
4	14719.00	49.40	40.74	53.28	9.70	46.56	74.00	-27.44	Peak	HORIZONTAL
5	15892.00	48.51	39.12	51.36	12.07	48.34	74.00	-25.66	Peak	HORIZONTAL
6	17354.00	45.51	41.69	52.36	15.44	50.28	74.00	-23.72	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + 5V/3A load + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 71

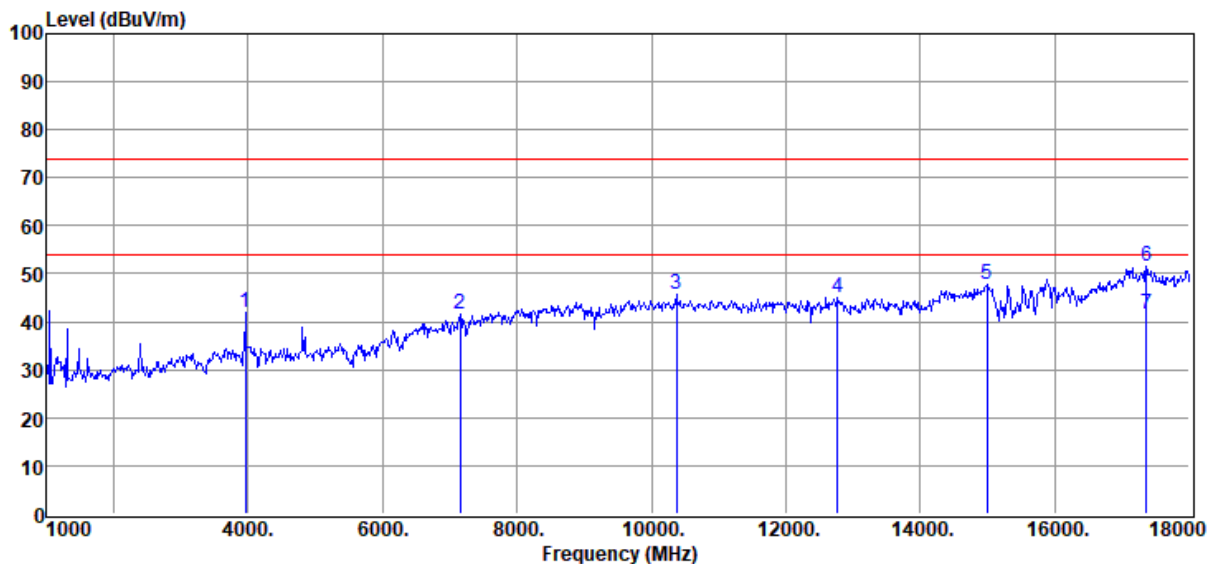

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	60.24	30.66	54.10	4.96	41.76	74.00	-32.24	Peak	HORIZONTAL
2	7154.00	52.59	37.27	54.87	6.57	41.56	74.00	-32.44	Peak	HORIZONTAL
3	10367.00	50.64	39.63	52.84	8.17	45.60	74.00	-28.40	Peak	HORIZONTAL
4	12764.00	49.53	39.89	53.01	8.65	45.06	74.00	-28.94	Peak	HORIZONTAL
5	14991.00	49.50	40.91	52.72	9.96	47.65	74.00	-26.35	Peak	HORIZONTAL
6	17354.00	46.85	41.69	52.36	15.44	51.62	74.00	-22.38	Peak	HORIZONTAL
7	17354.00	36.87	41.69	52.36	15.44	41.64	54.00	-12.36	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + 5V/3A load + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 72

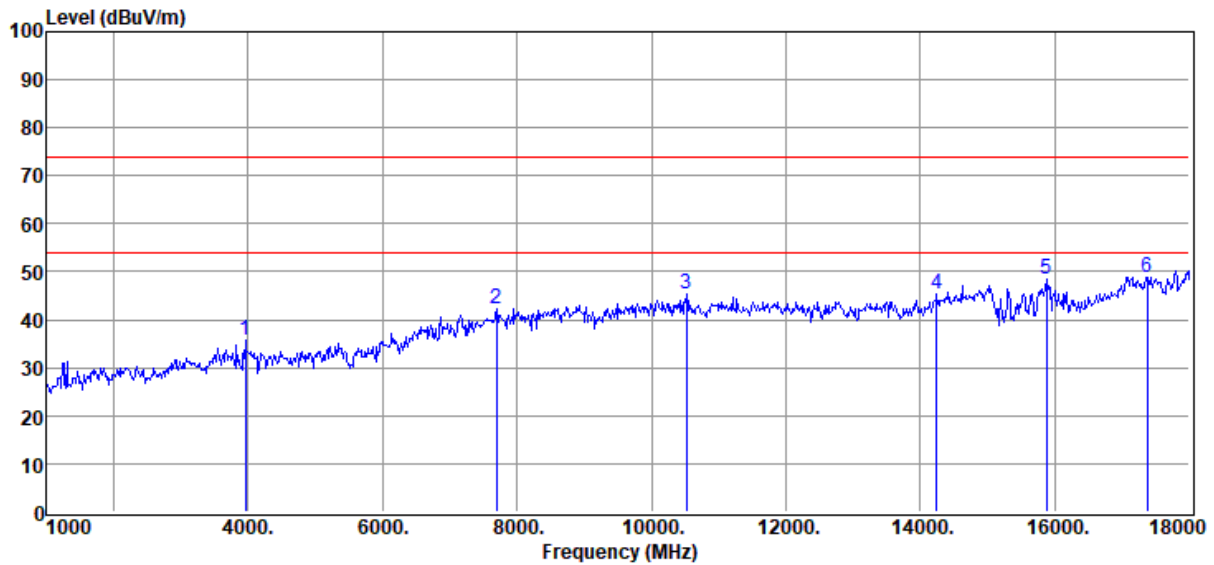

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	54.24	30.66	54.10	4.96	35.76	74.00	-38.24	Peak	VERTICAL
2	7698.00	52.81	37.20	54.76	6.93	42.18	74.00	-31.82	Peak	VERTICAL
3	10520.00	50.51	39.62	52.73	8.12	45.52	74.00	-28.48	Peak	VERTICAL
4	14243.00	49.58	40.76	54.28	9.24	45.30	74.00	-28.70	Peak	VERTICAL
5	15875.00	48.65	39.17	51.38	12.03	48.47	74.00	-25.53	Peak	VERTICAL
6	17371.00	44.21	41.66	52.35	15.44	48.96	74.00	-25.04	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + 5V/3A load + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 73

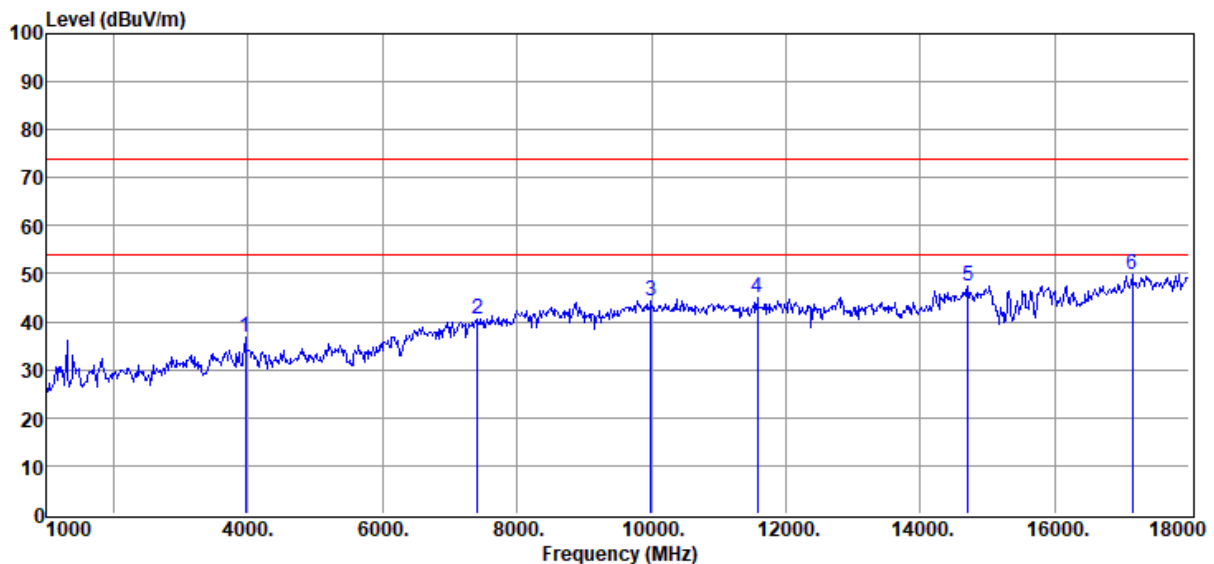

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	55.28	30.66	54.10	4.96	36.80	74.00	-37.20	Peak	VERTICAL
2	7409.00	51.66	37.13	54.81	6.74	40.72	74.00	-33.28	Peak	VERTICAL
3	9993.00	49.63	39.52	53.10	8.31	44.36	74.00	-29.64	Peak	VERTICAL
4	11574.00	49.57	39.27	51.99	8.22	45.07	74.00	-28.93	Peak	VERTICAL
5	14702.00	50.41	40.70	53.31	9.69	47.49	74.00	-26.51	Peak	VERTICAL
6	17150.00	45.28	41.65	52.44	15.47	49.96	74.00	-24.04	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + 5V/3A load + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 74

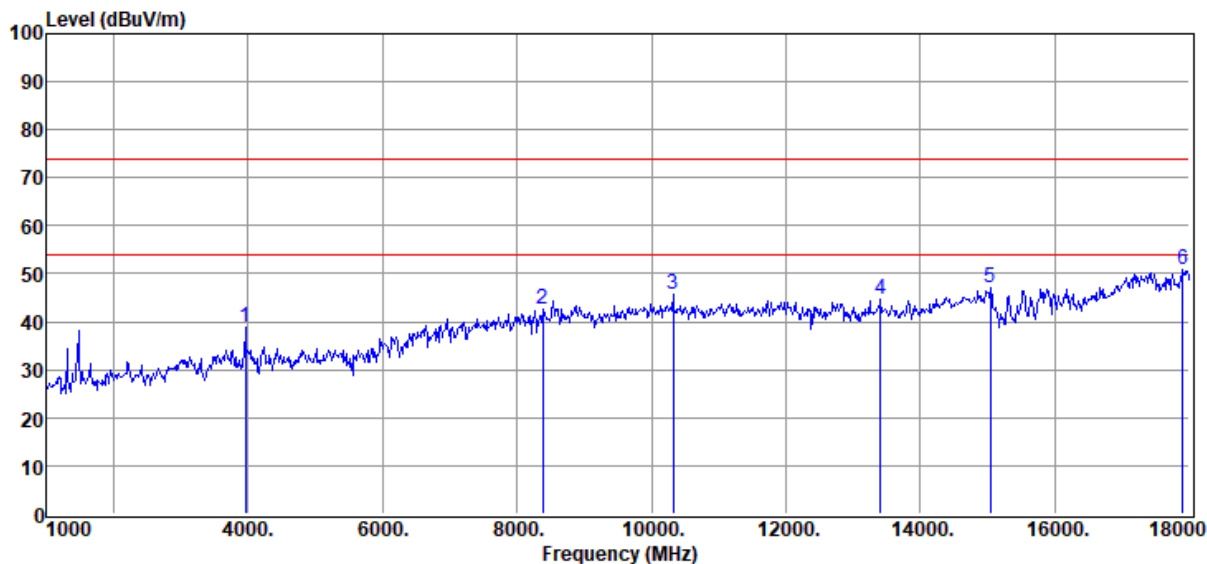

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	57.36	30.66	54.10	4.96	38.88	74.00	-35.12	Peak	HORIZONTAL
2	8378.00	50.98	38.36	54.31	7.48	42.51	74.00	-31.49	Peak	HORIZONTAL
3	10316.00	50.59	39.68	52.87	8.19	45.59	74.00	-28.41	Peak	HORIZONTAL
4	13410.00	49.89	39.91	53.99	8.84	44.65	74.00	-29.35	Peak	HORIZONTAL
5	15042.00	48.83	40.82	52.64	10.07	47.08	74.00	-26.92	Peak	HORIZONTAL
6	17898.00	42.59	44.95	52.14	15.35	50.75	74.00	-23.25	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + USB disk Audio + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 75

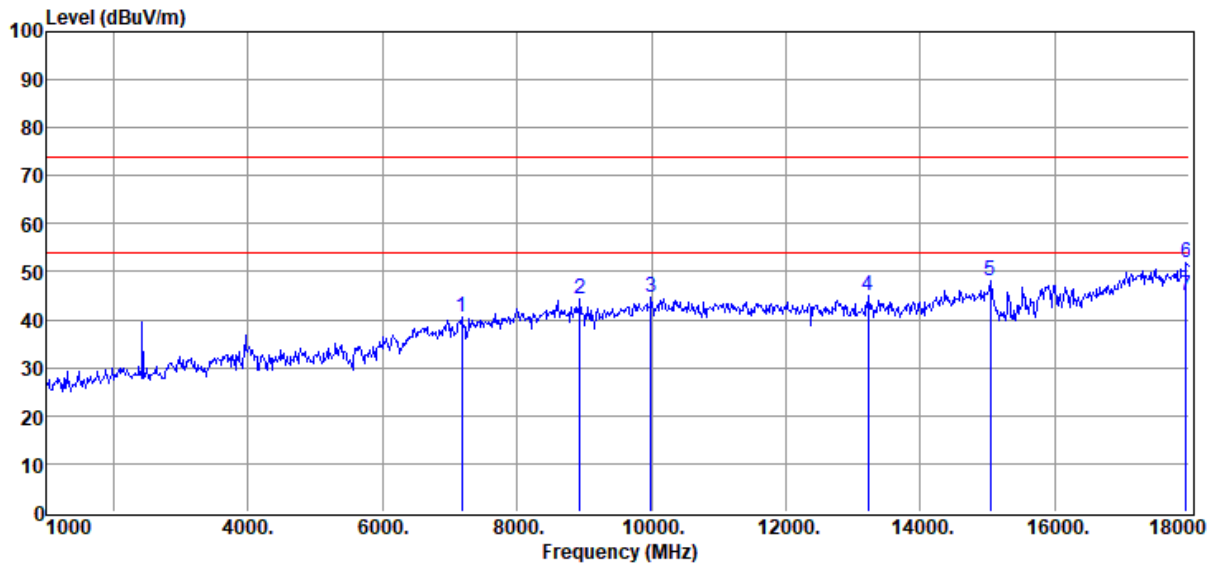

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7171.00	51.77	37.13	54.86	6.58	40.62	74.00	-33.38	Peak	HORIZONTAL
2	8939.00	51.48	38.44	53.76	8.00	44.16	74.00	-29.84	Peak	HORIZONTAL
3	9993.00	49.90	39.52	53.10	8.31	44.63	74.00	-29.37	Peak	HORIZONTAL
4	13223.00	49.75	40.23	53.72	8.78	45.04	74.00	-28.96	Peak	HORIZONTAL
5	15042.00	49.73	40.82	52.64	10.07	47.98	74.00	-26.02	Peak	HORIZONTAL
6	17949.00	42.95	45.59	52.12	15.34	51.76	74.00	-22.24	Peak	HORIZONTAL
7	17949.00	36.20	45.59	52.12	15.34	45.01	54.00	-8.99	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + USB disk Audio + MIC*2 +
Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 76

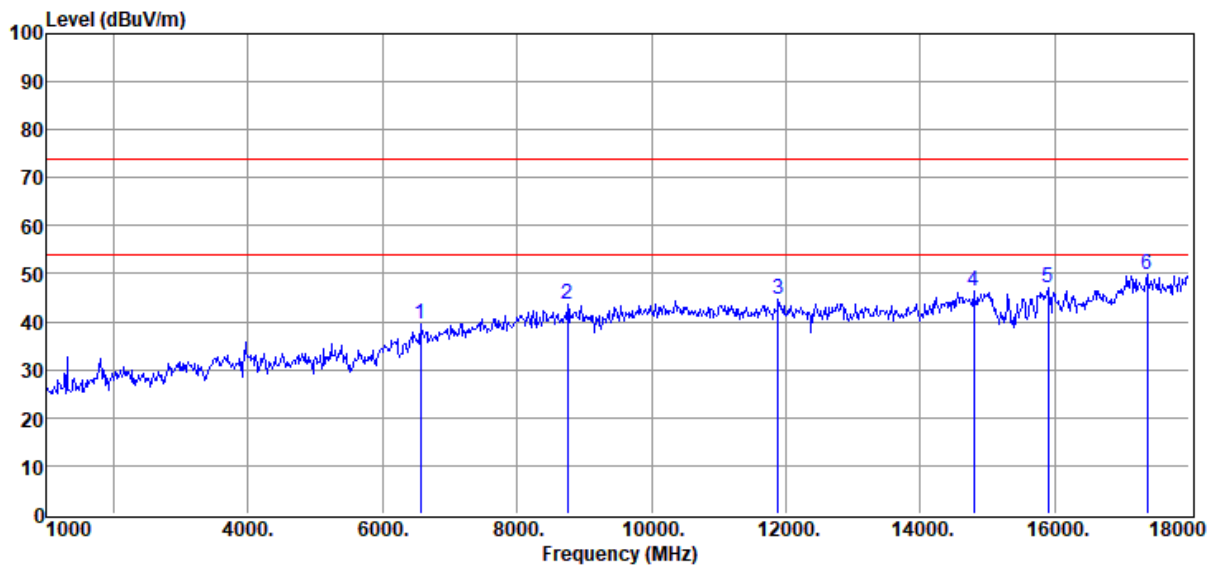

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6559.00	53.17	35.06	54.98	6.28	39.53	74.00	-34.47	Peak	VERTICAL
2	8752.00	51.25	38.50	53.94	7.83	43.64	74.00	-30.36	Peak	VERTICAL
3	11880.00	48.54	39.40	51.78	8.36	44.52	74.00	-29.48	Peak	VERTICAL
4	14787.00	48.76	40.87	53.14	9.77	46.26	74.00	-27.74	Peak	VERTICAL
5	15892.00	47.27	39.12	51.36	12.07	47.10	74.00	-26.90	Peak	VERTICAL
6	17371.00	45.02	41.66	52.35	15.44	49.77	74.00	-24.23	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + USB disk Audio + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 77

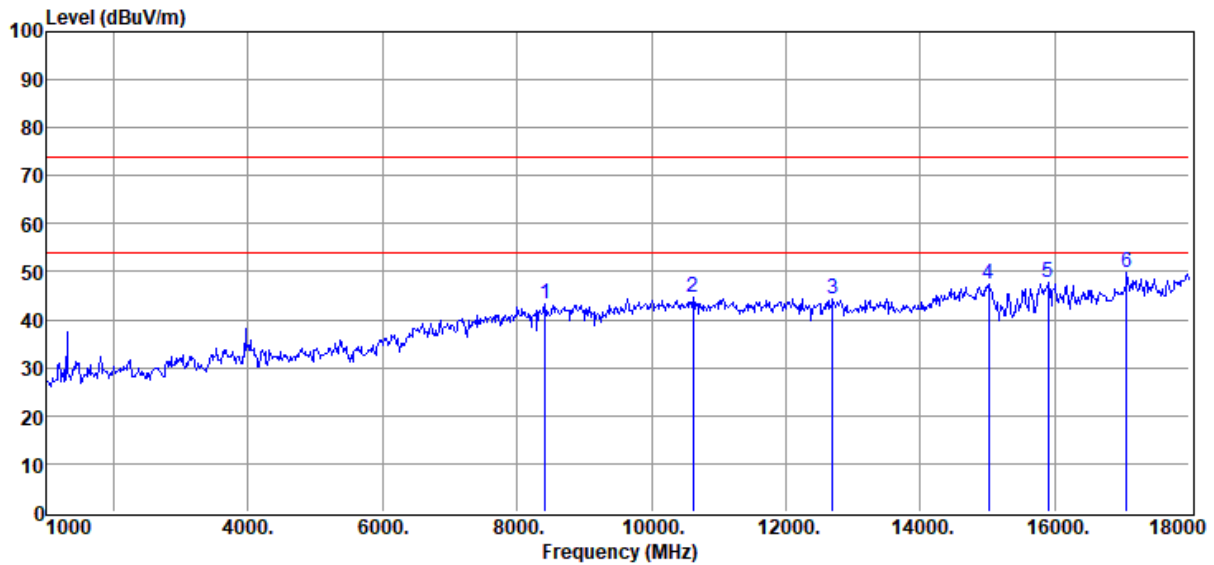

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8412.00	51.66	38.40	54.27	7.52	43.31	74.00	-30.69	Peak	VERTICAL
2	10622.00	49.54	39.66	52.66	8.08	44.62	74.00	-29.38	Peak	VERTICAL
3	12696.00	49.06	39.69	52.90	8.63	44.48	74.00	-29.52	Peak	VERTICAL
4	15008.00	49.31	40.88	52.69	9.99	47.49	74.00	-26.51	Peak	VERTICAL
5	15892.00	47.94	39.12	51.36	12.07	47.77	74.00	-26.23	Peak	VERTICAL
6	17065.00	45.10	41.56	52.47	15.49	49.68	74.00	-24.32	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + USB disk Audio + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 78

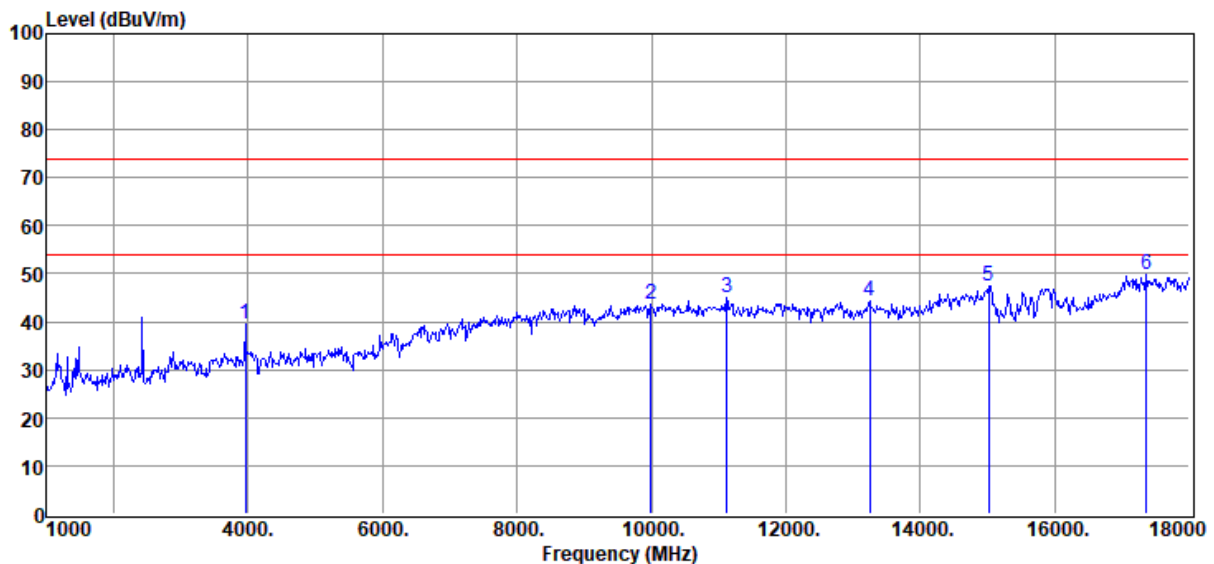

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	58.08	30.66	54.10	4.96	39.60	74.00	-34.40	Peak	HORIZONTAL
2	9993.00	49.05	39.52	53.10	8.31	43.78	74.00	-30.22	Peak	HORIZONTAL
3	11115.00	49.85	39.50	52.32	8.00	45.03	74.00	-28.97	Peak	HORIZONTAL
4	13240.00	49.20	40.18	53.75	8.79	44.42	74.00	-29.58	Peak	HORIZONTAL
5	15008.00	49.30	40.88	52.69	9.99	47.48	74.00	-26.52	Peak	HORIZONTAL
6	17354.00	44.91	41.69	52.36	15.44	49.68	74.00	-24.32	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 79

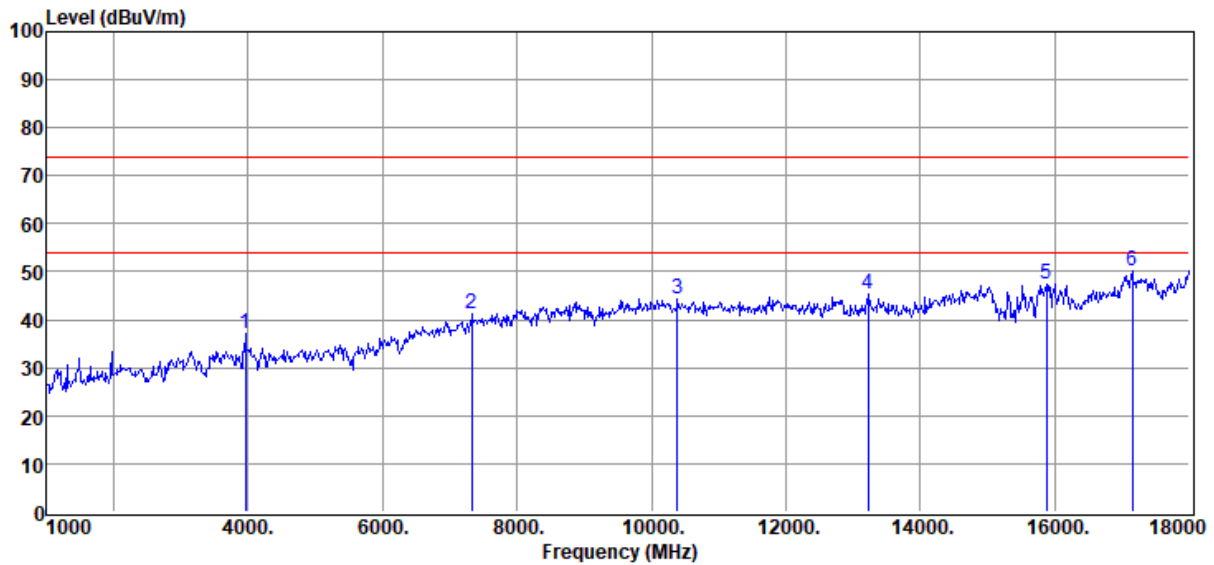

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	55.61	30.66	54.10	4.96	37.13	74.00	-36.87	Peak	HORIZONTAL
2	7324.00	53.07	36.34	54.83	6.68	41.26	74.00	-32.74	Peak	HORIZONTAL
3	10384.00	49.21	39.62	52.82	8.17	44.18	74.00	-29.82	Peak	HORIZONTAL
4	13223.00	49.97	40.23	53.72	8.78	45.26	74.00	-28.74	Peak	HORIZONTAL
5	15875.00	47.54	39.17	51.38	12.03	47.36	74.00	-26.64	Peak	HORIZONTAL
6	17150.00	45.39	41.65	52.44	15.47	50.07	74.00	-23.93	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 80

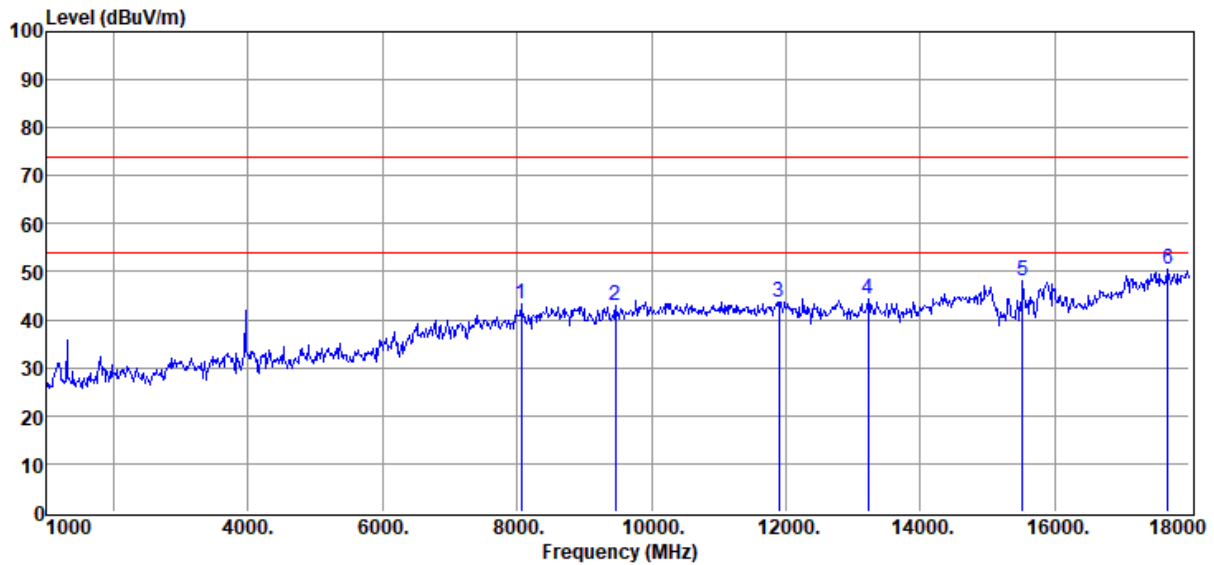

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8055.00	52.49	38.27	54.64	7.17	43.29	74.00	-30.71	Peak	VERTICAL
2	9466.00	50.33	37.77	53.41	8.17	42.86	74.00	-31.14	Peak	VERTICAL
3	11897.00	47.82	39.40	51.77	8.36	43.81	74.00	-30.19	Peak	VERTICAL
4	13223.00	49.04	40.23	53.72	8.78	44.33	74.00	-29.67	Peak	VERTICAL
5	15518.00	49.22	39.65	51.91	11.21	48.17	74.00	-25.83	Peak	VERTICAL
6	17677.00	44.92	42.31	52.23	15.38	50.38	74.00	-23.62	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 81

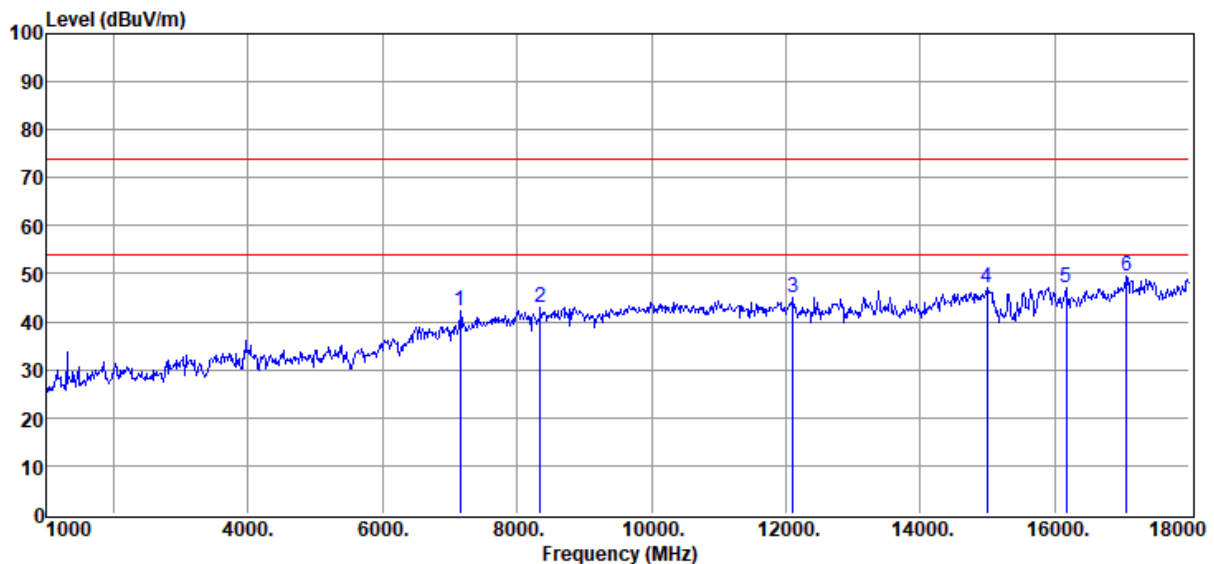

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7154.00	53.39	37.27	54.87	6.57	42.36	74.00	-31.64	Peak	VERTICAL
2	8344.00	51.71	38.29	54.34	7.45	43.11	74.00	-30.89	Peak	VERTICAL
3	12101.00	48.92	39.40	51.88	8.44	44.88	74.00	-29.12	Peak	VERTICAL
4	14991.00	48.83	40.91	52.72	9.96	46.98	74.00	-27.02	Peak	VERTICAL
5	16164.00	46.79	38.84	51.42	12.85	47.06	74.00	-26.94	Peak	VERTICAL
6	17065.00	44.81	41.56	52.47	15.49	49.39	74.00	-24.61	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Laptop USB Audio +
Earphone + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 82

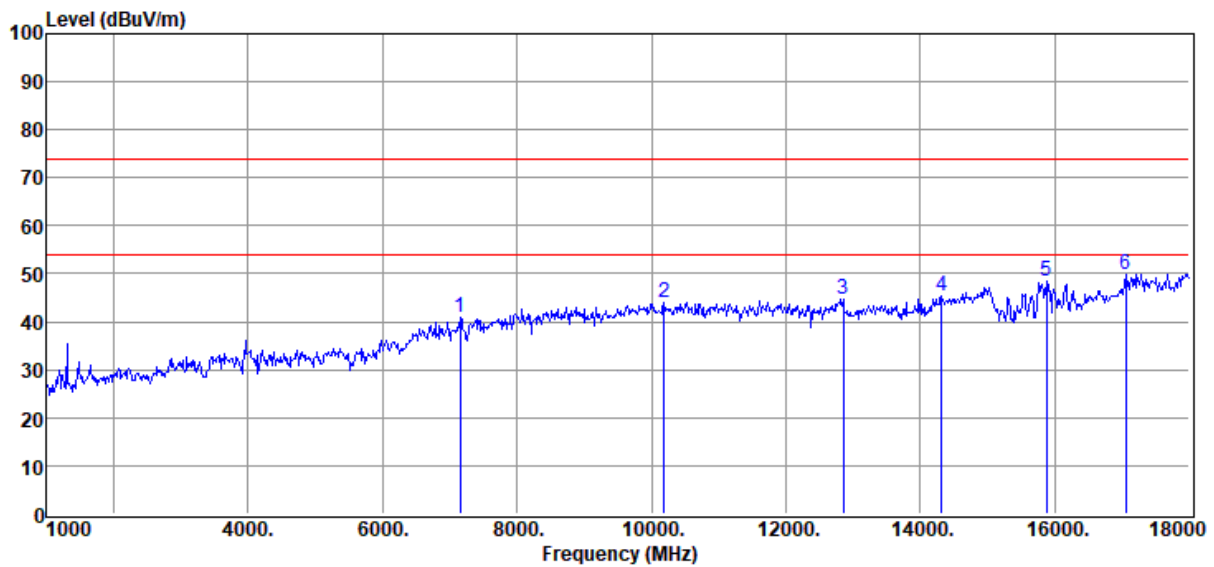

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7154.00	52.04	37.27	54.87	6.57	41.01	74.00	-32.99	Peak	HORIZONTAL
2	10180.00	49.30	39.54	52.97	8.24	44.11	74.00	-29.89	Peak	HORIZONTAL
3	12849.00	49.11	40.05	53.15	8.67	44.68	74.00	-29.32	Peak	HORIZONTAL
4	14311.00	49.63	40.70	54.13	9.31	45.51	74.00	-28.49	Peak	HORIZONTAL
5	15875.00	48.50	39.17	51.38	12.03	48.32	74.00	-25.68	Peak	HORIZONTAL
6	17048.00	45.49	41.49	52.48	15.49	49.99	74.00	-24.01	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 83

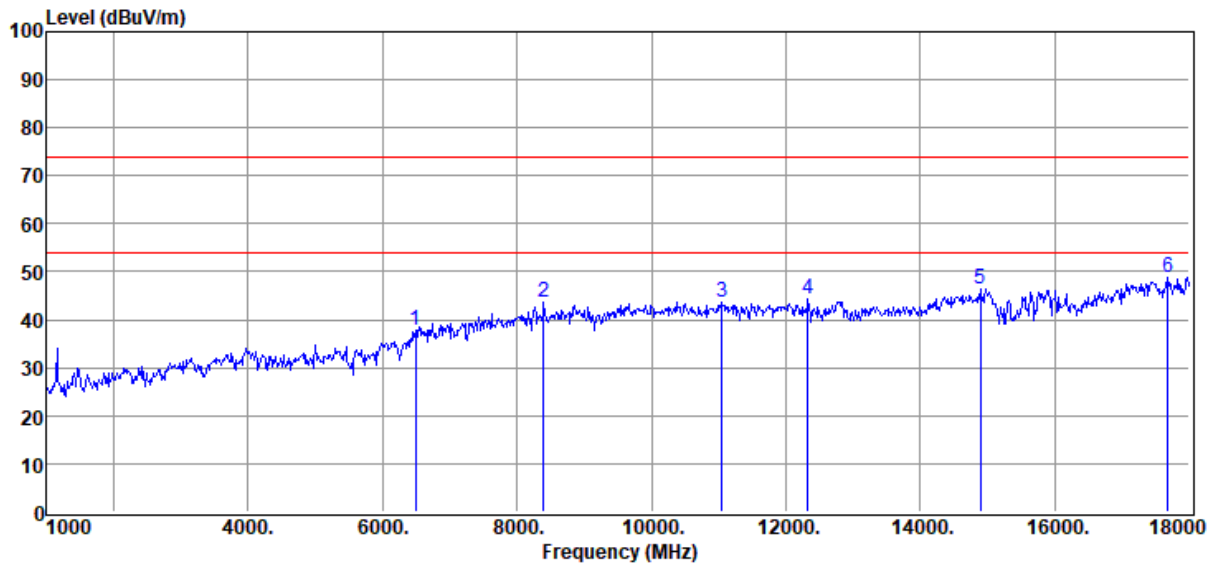

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6491.00	51.59	34.80	55.00	6.25	37.64	74.00	-36.36	Peak	HORIZONTAL
2	8395.00	51.91	38.39	54.29	7.50	43.51	74.00	-30.49	Peak	HORIZONTAL
3	11047.00	48.39	39.66	52.37	7.97	43.65	74.00	-30.35	Peak	HORIZONTAL
4	12322.00	48.46	39.54	52.26	8.51	44.25	74.00	-29.75	Peak	HORIZONTAL
5	14889.00	48.57	40.99	52.93	9.87	46.50	74.00	-27.50	Peak	HORIZONTAL
6	17677.00	43.30	42.31	52.23	15.38	48.76	74.00	-25.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 84

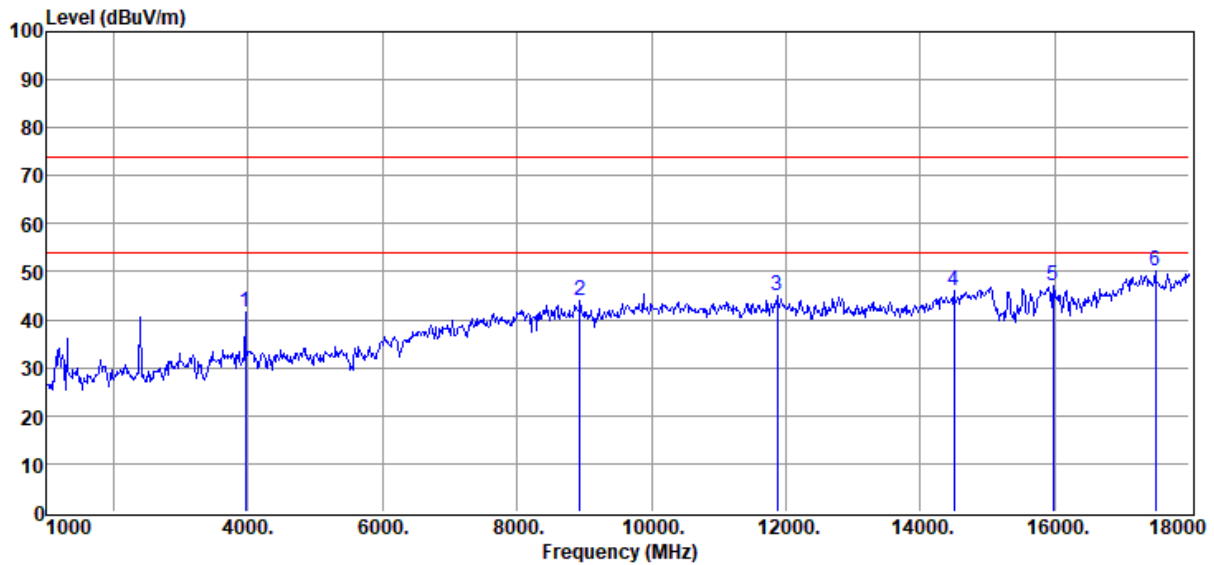

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	59.95	30.66	54.10	4.96	41.47	74.00	-32.53	Peak	VERTICAL
2	8939.00	51.38	38.44	53.76	8.00	44.06	74.00	-29.94	Peak	VERTICAL
3	11863.00	48.89	39.40	51.79	8.35	44.85	74.00	-29.15	Peak	VERTICAL
4	14498.00	49.83	40.60	53.74	9.49	46.18	74.00	-27.82	Peak	VERTICAL
5	15977.00	47.15	38.79	51.23	12.27	46.98	74.00	-27.02	Peak	VERTICAL
6	17490.00	44.94	42.05	52.30	15.42	50.11	74.00	-23.89	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 85

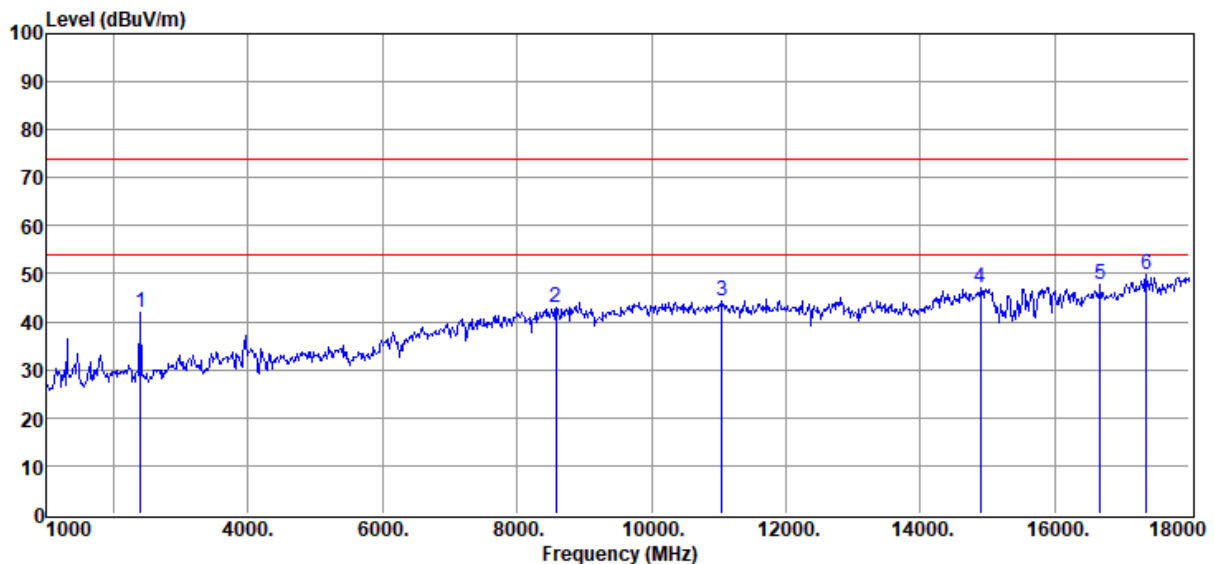

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2394.00	64.45	27.18	53.89	4.31	42.05	74.00	-31.95	Peak	VERTICAL
2	8582.00	50.97	38.43	54.10	7.67	42.97	74.00	-31.03	Peak	VERTICAL
3	11047.00	49.18	39.66	52.37	7.97	44.44	74.00	-29.56	Peak	VERTICAL
4	14889.00	49.17	40.99	52.93	9.87	47.10	74.00	-26.90	Peak	VERTICAL
5	16674.00	45.29	40.20	52.08	14.48	47.89	74.00	-26.11	Peak	VERTICAL
6	17354.00	45.13	41.69	52.36	15.44	49.90	74.00	-24.10	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 86

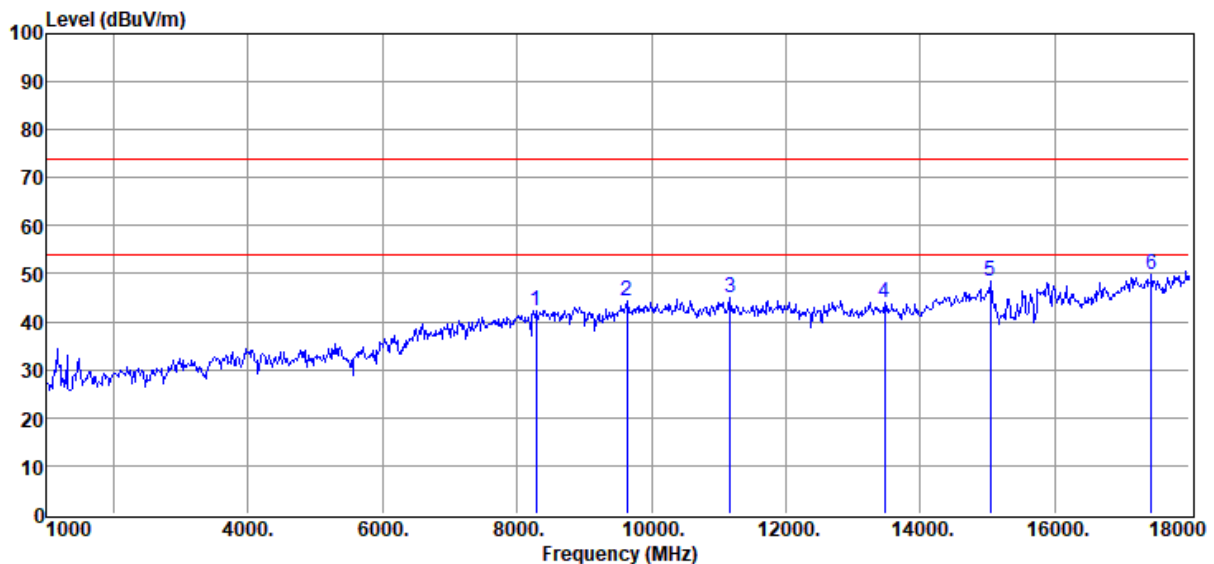

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8276.00	50.98	38.20	54.41	7.39	42.16	74.00	-31.84	Peak	HORIZONTAL
2	9636.00	51.12	38.29	53.31	8.22	44.32	74.00	-29.68	Peak	HORIZONTAL
3	11166.00	49.70	39.50	52.28	8.03	44.95	74.00	-29.05	Peak	HORIZONTAL
4	13461.00	49.20	39.96	54.06	8.85	43.95	74.00	-30.05	Peak	HORIZONTAL
5	15042.00	50.35	40.82	52.64	10.07	48.60	74.00	-25.40	Peak	HORIZONTAL
6	17439.00	44.77	41.80	52.32	15.42	49.67	74.00	-24.33	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Laptop USB Audio + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 87

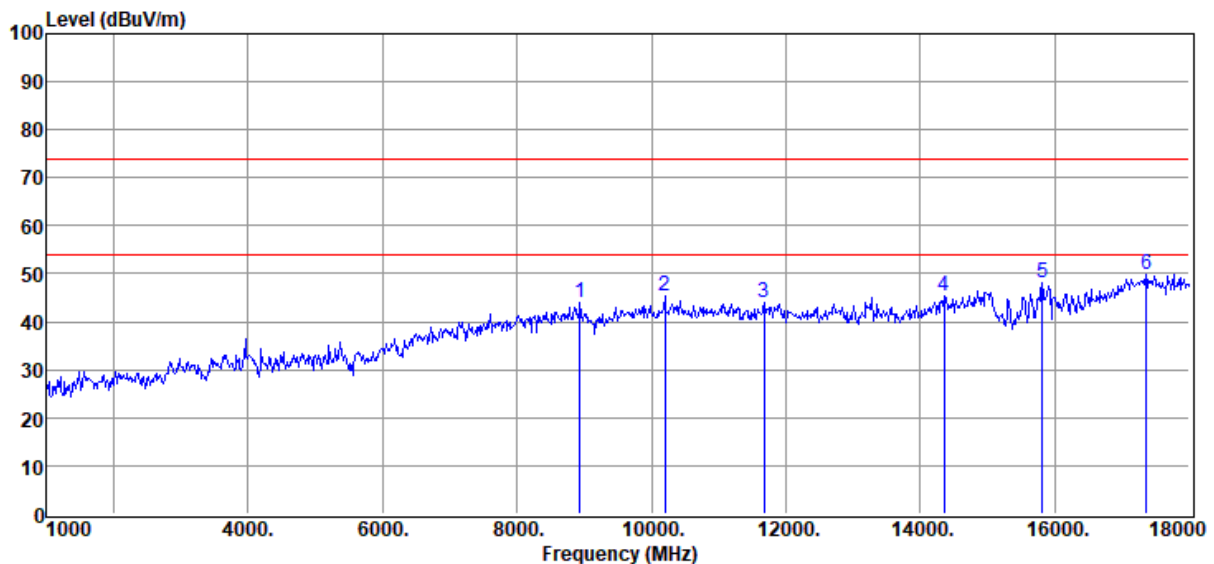

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8939.00	51.29	38.44	53.76	8.00	43.97	74.00	-30.03	Peak	HORIZONTAL
2	10197.00	50.70	39.51	52.96	8.24	45.49	74.00	-28.51	Peak	HORIZONTAL
3	11676.00	48.20	39.30	51.92	8.27	43.85	74.00	-30.15	Peak	HORIZONTAL
4	14345.00	49.29	40.70	54.06	9.34	45.27	74.00	-28.73	Peak	HORIZONTAL
5	15807.00	48.19	39.38	51.48	11.88	47.97	74.00	-26.03	Peak	HORIZONTAL
6	17354.00	45.19	41.69	52.36	15.44	49.96	74.00	-24.04	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-06-06

EUT

: Bluetooth Speaker

Power Supply

: Battery

Condition

: Temp:23.1°C,Humi:62.5%

Memo

:

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO


Test Mode

: Laptop USB Audio + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
VERTICAL

Data: 88

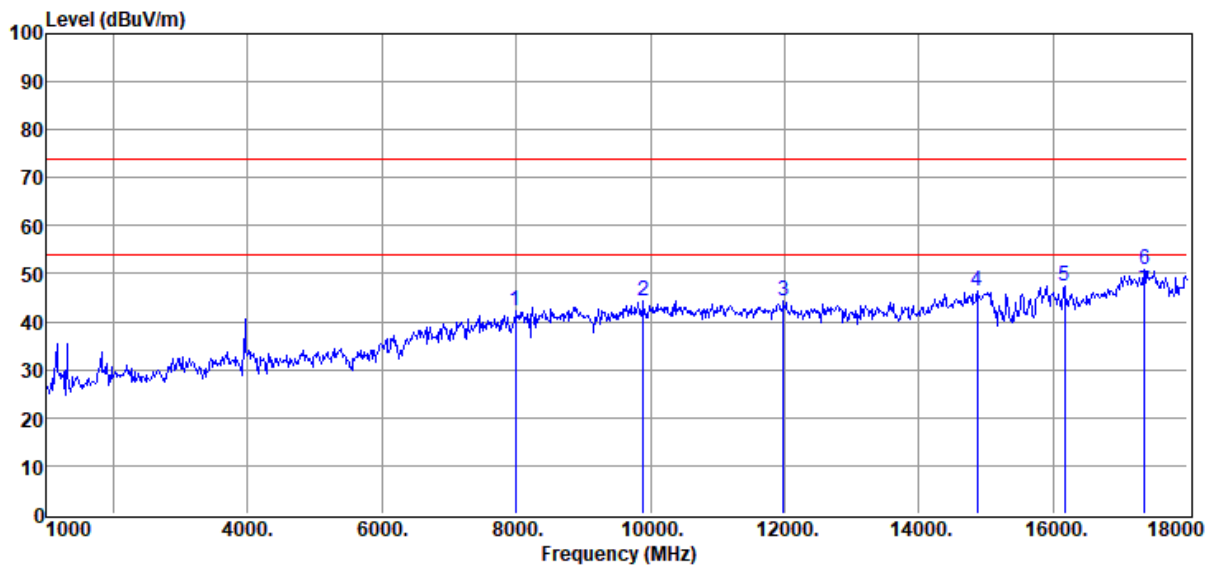

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margi n (dB)	Detector	Polarization
1	7987.00	51.75	38.00	54.70	7.11	42.16	74.00	31.84	Peak	VERTICAL
2	9891.00	50.29	39.08	53.16	8.28	44.49	74.00	29.51	Peak	VERTICAL
3	11982.00	48.27	39.40	51.71	8.40	44.36	74.00	29.64	Peak	VERTICAL
4	14872.00	48.48	40.97	52.96	9.85	46.34	74.00	27.66	Peak	VERTICAL
5	16164.00	47.16	38.84	51.42	12.85	47.43	74.00	26.57	Peak	VERTICAL
6	17354.00	46.24	41.69	52.36	15.44	51.01	74.00	22.99	Peak	VERTICAL
7	17354.00	41.70	41.69	52.36	15.44	46.47	54.00	7.53	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-06-06

EUT

: Bluetooth Speaker

Power Supply

: AC 240V/50Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Charging + Laptop USB Audio + MIC*2
+ Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
VERTICAL

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Data: 89

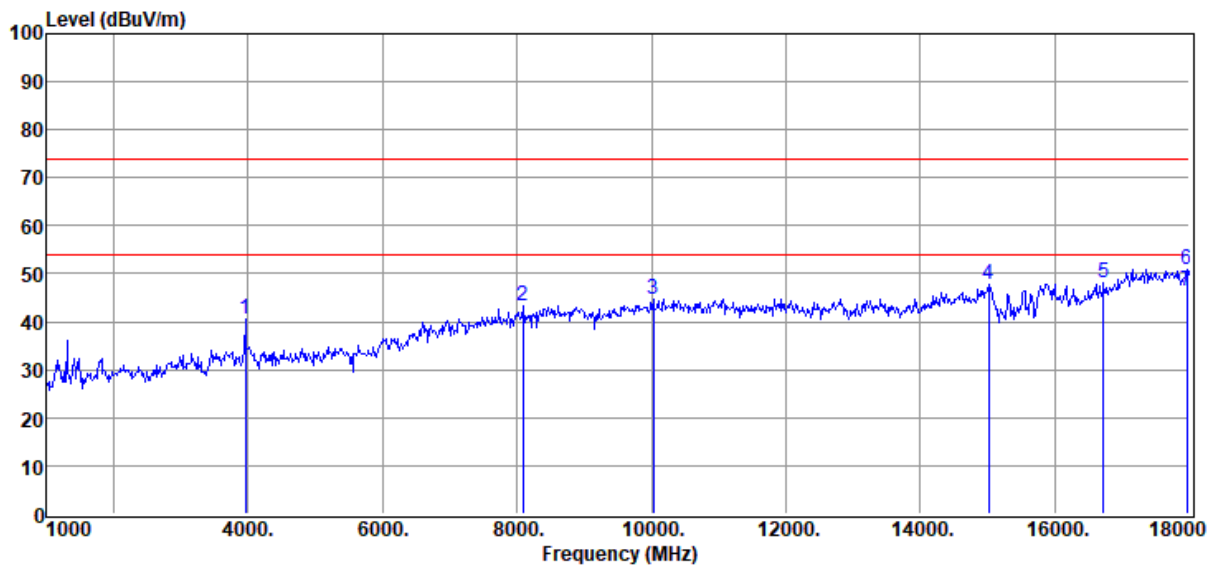

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	59.09	30.66	54.10	4.96	40.61	74.00	-33.39	Peak	VERTICAL
2	8089.00	52.62	38.07	54.61	7.21	43.29	74.00	-30.71	Peak	VERTICAL
3	10027.00	49.89	39.63	53.08	8.30	44.74	74.00	-29.26	Peak	VERTICAL
4	15008.00	49.61	40.88	52.69	9.99	47.79	74.00	-26.21	Peak	VERTICAL
5	16725.00	45.22	40.33	52.15	14.64	48.04	74.00	-25.96	Peak	VERTICAL
6	17966.00	42.01	45.79	52.11	15.34	51.03	74.00	-22.97	Peak	VERTICAL
7	17966.00	37.48	45.79	52.11	15.34	46.50	54.00	-7.50	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Laptop USB Audio + MIC*2
+ Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 90

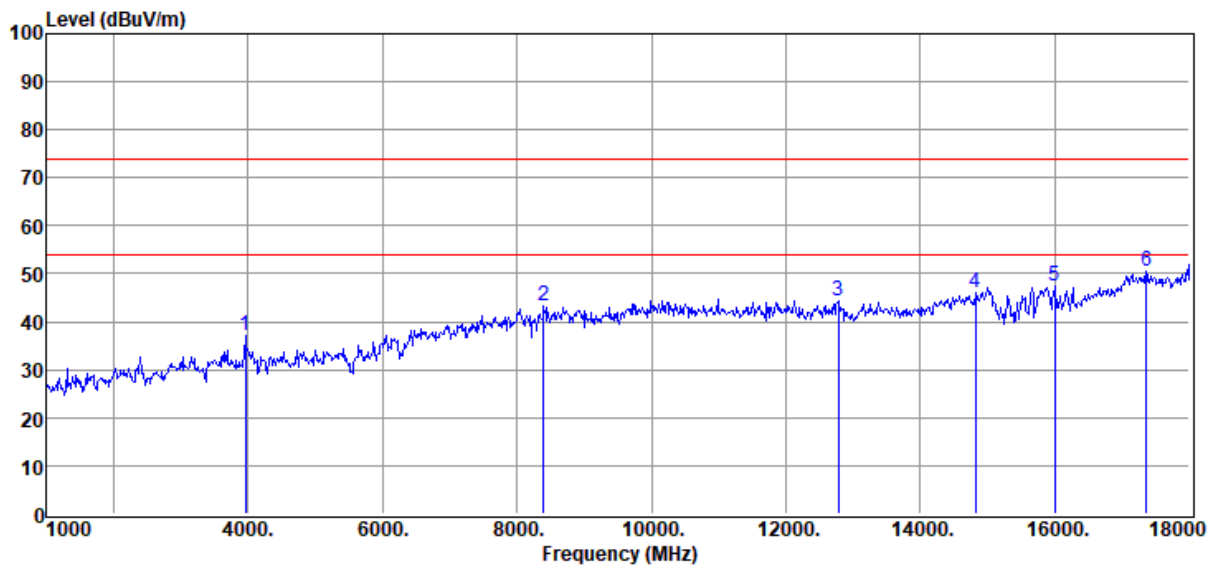

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	55.53	30.66	54.10	4.96	37.05	74.00	-36.95	Peak	HORIZONTAL
2	8395.00	51.73	38.39	54.29	7.50	43.33	74.00	-30.67	Peak	HORIZONTAL
3	12781.00	48.85	39.94	53.04	8.65	44.40	74.00	-29.60	Peak	HORIZONTAL
4	14821.00	48.35	40.92	53.07	9.80	46.00	74.00	-28.00	Peak	HORIZONTAL
5	15994.00	47.45	38.72	51.21	12.31	47.27	74.00	-26.73	Peak	HORIZONTAL
6	17354.00	45.69	41.69	52.36	15.44	50.46	74.00	-23.54	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Laptop USB Audio + MIC*2
+ Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 91

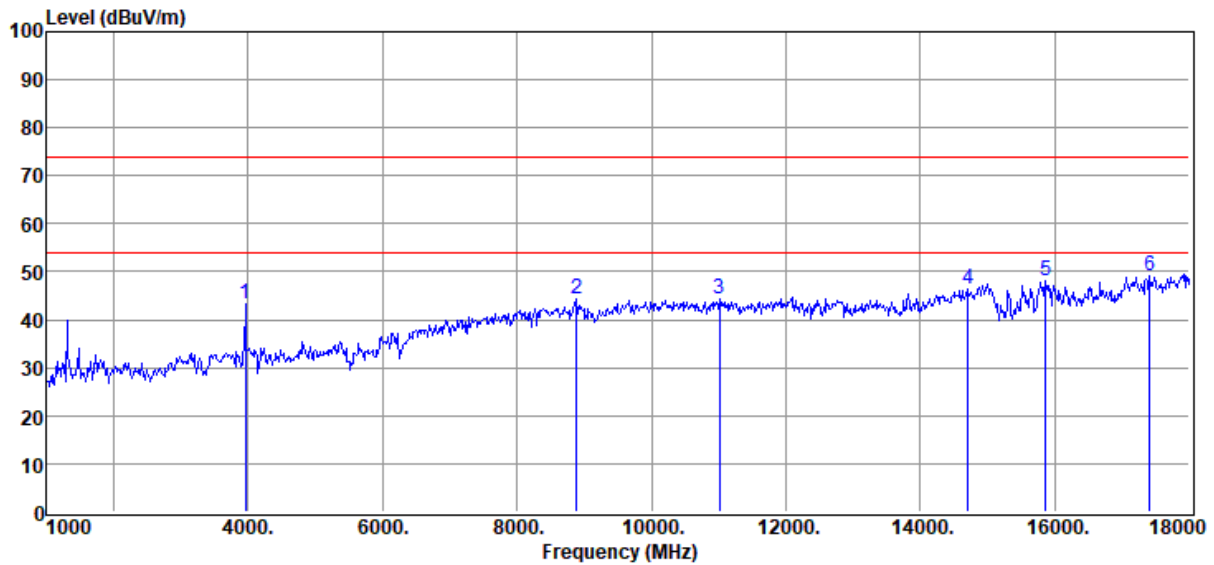

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	61.64	30.66	54.10	4.96	43.16	74.00	-30.84	Peak	HORIZONTAL
2	8888.00	51.48	38.60	53.81	7.95	44.22	74.00	-29.78	Peak	HORIZONTAL
3	11013.00	48.86	39.76	52.39	7.96	44.19	74.00	-29.81	Peak	HORIZONTAL
4	14702.00	49.37	40.70	53.31	9.69	46.45	74.00	-27.55	Peak	HORIZONTAL
5	15858.00	48.22	39.23	51.41	12.00	48.04	74.00	-25.96	Peak	HORIZONTAL
6	17405.00	44.59	41.63	52.34	15.43	49.31	74.00	-24.69	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Laptop USB Audio + MIC*2
+ Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 92

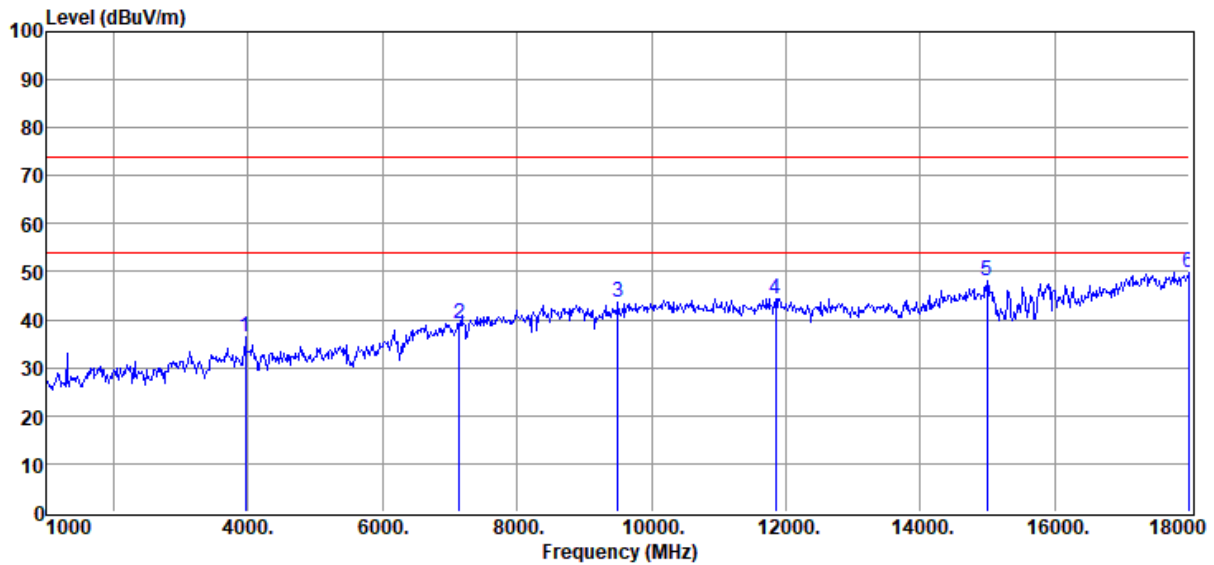

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	54.87	30.66	54.10	4.96	36.39	74.00	-37.61	Peak	VERTICAL
2	7137.00	50.76	36.86	54.87	6.56	39.31	74.00	-34.69	Peak	VERTICAL
3	9500.00	51.08	37.70	53.39	8.18	43.57	74.00	-30.43	Peak	VERTICAL
4	11846.00	48.35	39.40	51.80	8.34	44.29	74.00	-29.71	Peak	VERTICAL
5	14991.00	49.96	40.91	52.72	9.96	48.11	74.00	-25.89	Peak	VERTICAL
6	17983.00	40.78	46.00	52.11	15.33	50.00	74.00	-24.00	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Phone USB Audio + MIC*2
+ Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 93

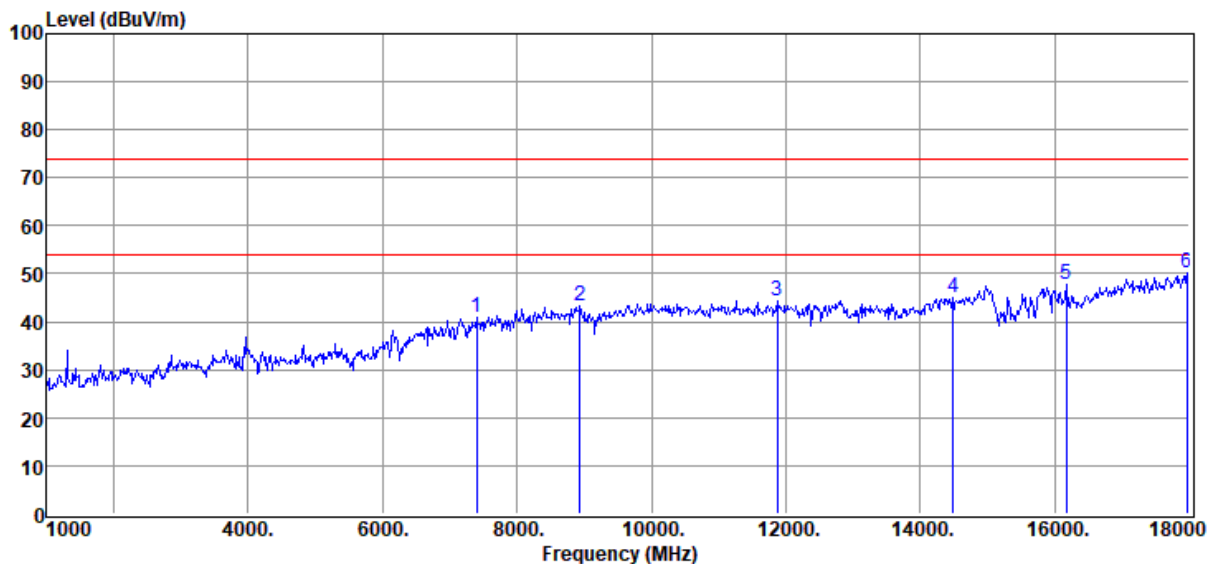

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7392.00	51.97	37.09	54.82	6.73	40.97	74.00	-33.03	Peak	VERTICAL
2	8939.00	50.47	38.44	53.76	8.00	43.15	74.00	-30.85	Peak	VERTICAL
3	11863.00	48.36	39.40	51.79	8.35	44.32	74.00	-29.68	Peak	VERTICAL
4	14481.00	48.74	40.62	53.77	9.47	45.06	74.00	-28.94	Peak	VERTICAL
5	16164.00	47.33	38.84	51.42	12.85	47.60	74.00	-26.40	Peak	VERTICAL
6	17966.00	41.29	45.79	52.11	15.34	50.31	74.00	-23.69	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Phone USB Audio + MIC*2
+ Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 94

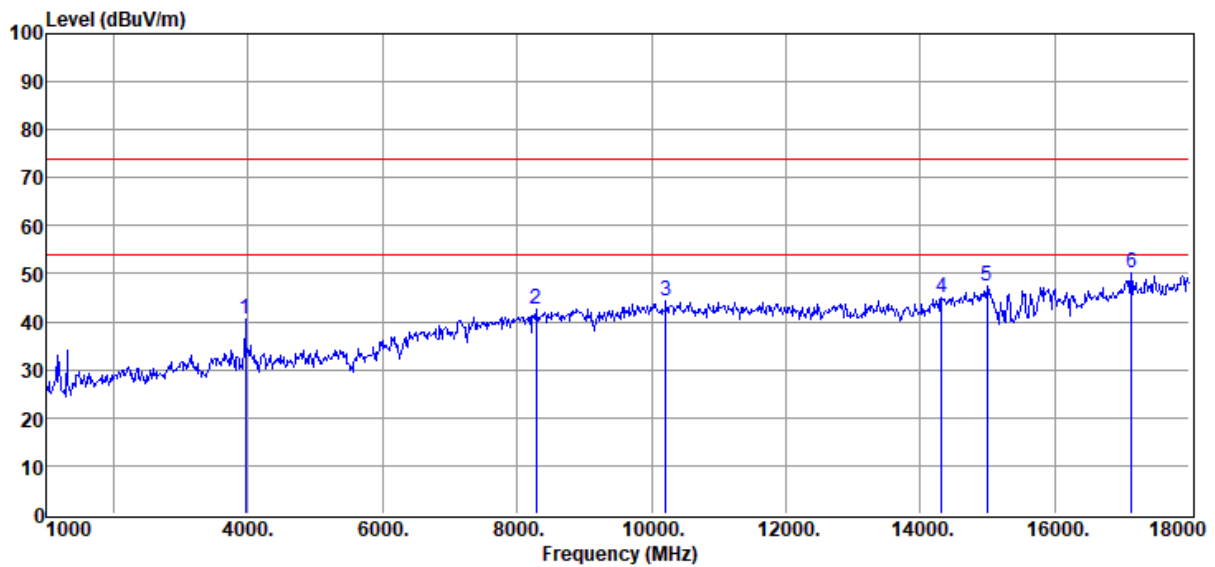

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	59.19	30.66	54.10	4.96	40.71	74.00	-33.29	Peak	HORIZONTAL
2	8276.00	51.36	38.20	54.41	7.39	42.54	74.00	-31.46	Peak	HORIZONTAL
3	10214.00	49.37	39.53	52.94	8.23	44.19	74.00	-29.81	Peak	HORIZONTAL
4	14311.00	49.14	40.70	54.13	9.31	45.02	74.00	-28.98	Peak	HORIZONTAL
5	14991.00	49.30	40.91	52.72	9.96	47.45	74.00	-26.55	Peak	HORIZONTAL
6	17133.00	45.33	41.67	52.45	15.48	50.03	74.00	-23.97	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Phone USB Audio + MIC*2
+ Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 95

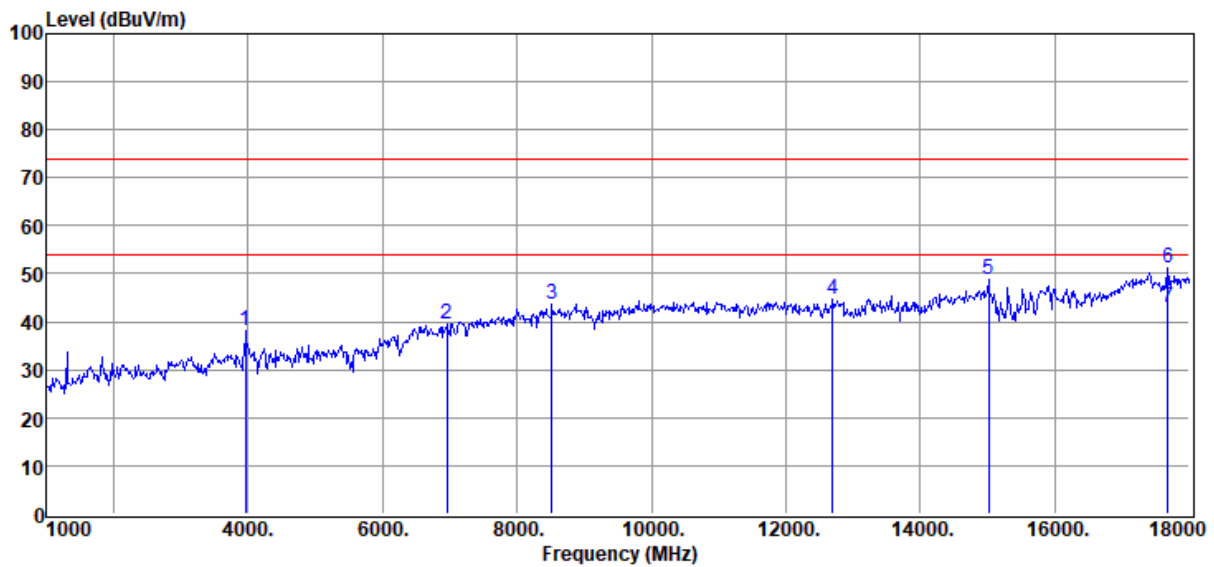

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	56.47	30.66	54.10	4.96	37.99	74.00	-36.01	Peak	HORIZONTAL
2	6950.00	51.69	36.20	54.91	6.44	39.42	74.00	-34.58	Peak	HORIZONTAL
3	8514.00	51.98	38.37	54.17	7.61	43.79	74.00	-30.21	Peak	HORIZONTAL
4	12696.00	49.16	39.69	52.90	8.63	44.58	74.00	-29.42	Peak	HORIZONTAL
5	15008.00	50.68	40.88	52.69	9.99	48.86	74.00	-25.14	Peak	HORIZONTAL
6	17677.00	45.84	42.31	52.23	15.38	51.30	74.00	-22.70	Peak	HORIZONTAL
7	17677.00	37.48	42.31	52.23	15.38	42.94	54.00	-11.06	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date

: 2025-06-06

Tested By

: Aaron Liu

EUT

: Bluetooth Speaker

Model Number

: BANDBOX TRIO

Power Supply

: AC 240V/50Hz

Test Mode

: Charging + Phone USB Audio + MIC*2
+ Guitar mode

Condition

: Temp:23.1°C,Humi:62.5%


Antenna/Distance

: 2023 BBHA9120D1#/3m/
VERTICAL

Memo

: The first: FG4CELL21201

Data: 96

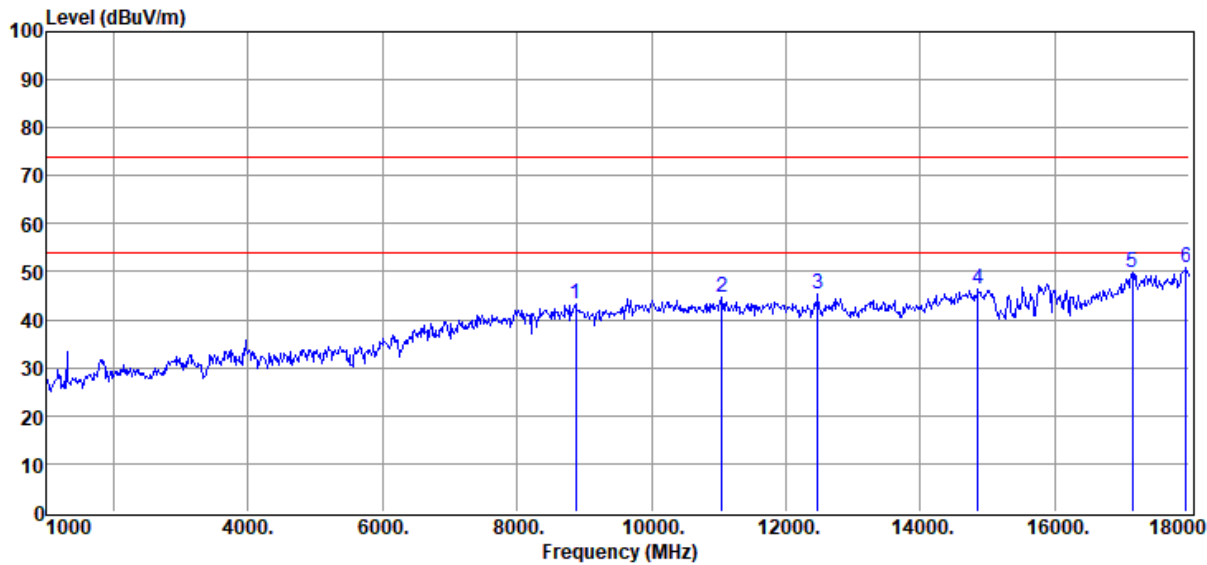

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8871.00	50.55	38.60	53.82	7.94	43.27	74.00	-30.73	Peak	VERTICAL
2	11047.00	49.43	39.66	52.37	7.97	44.69	74.00	-29.31	Peak	VERTICAL
3	12475.00	49.52	39.70	52.52	8.56	45.26	74.00	-28.74	Peak	VERTICAL
4	14855.00	48.46	40.96	53.00	9.83	46.25	74.00	-27.75	Peak	VERTICAL
5	17150.00	45.16	41.65	52.44	15.47	49.84	74.00	-24.16	Peak	VERTICAL
6	17949.00	41.99	45.59	52.12	15.34	50.80	74.00	-23.20	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-06-06

EUT

: Bluetooth Speaker

Power Supply

: Battery

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Phone USB Audio + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
VERTICAL

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Data: 97

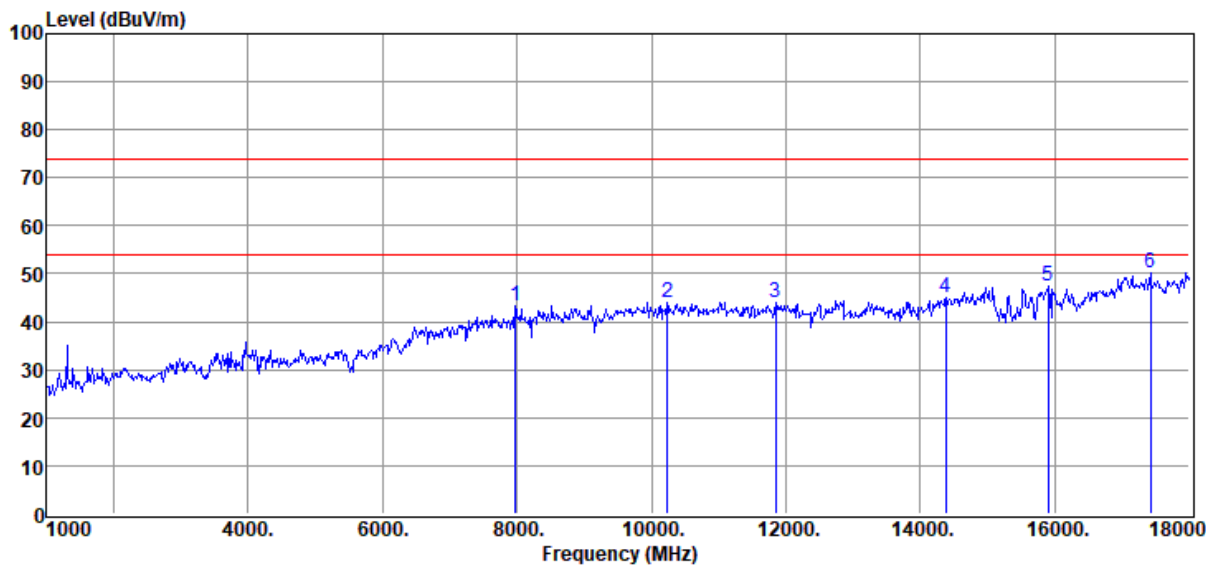

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	7970.00	52.88	37.86	54.71	7.10	43.13	74.00	-30.87	Peak	VERTICAL
2	10231.00	49.10	39.56	52.93	8.22	43.95	74.00	-30.05	Peak	VERTICAL
3	11846.00	48.21	39.40	51.80	8.34	44.15	74.00	-29.85	Peak	VERTICAL
4	14379.00	48.86	40.70	53.99	9.38	44.95	74.00	-29.05	Peak	VERTICAL
5	15892.00	47.52	39.12	51.36	12.07	47.35	74.00	-26.65	Peak	VERTICAL
6	17422.00	45.35	41.71	52.33	15.43	50.16	74.00	-23.84	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : Battery**Test Mode** : Phone USB Audio + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 98

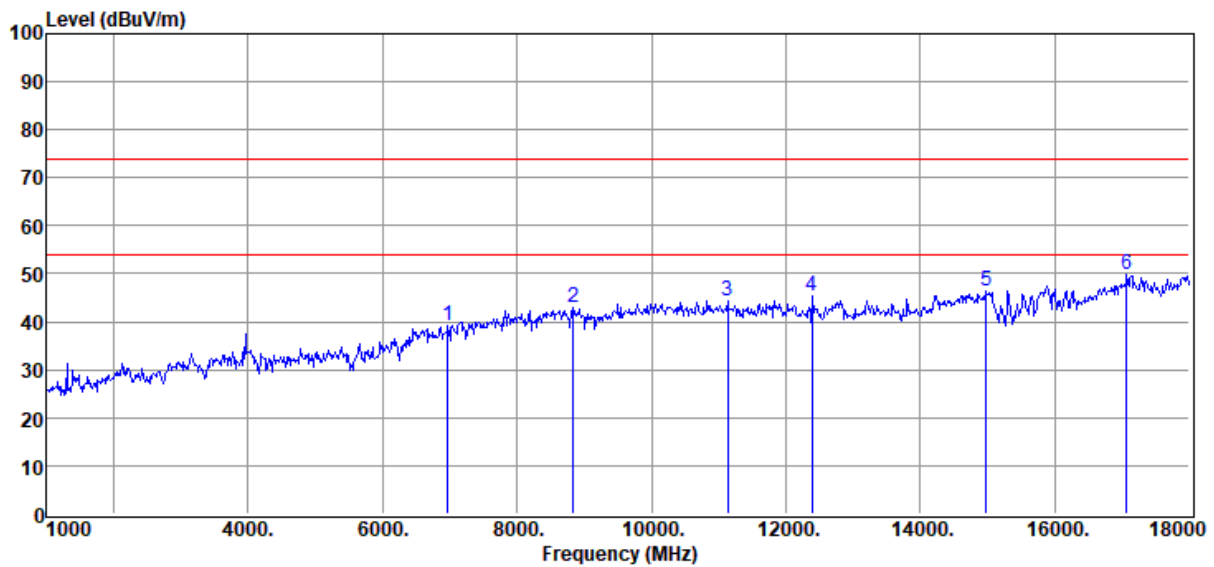

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6967.00	51.39	36.10	54.91	6.45	39.03	74.00	-34.97	Peak	HORIZONTAL
2	8837.00	50.30	38.57	53.86	7.91	42.92	74.00	-31.08	Peak	HORIZONTAL
3	11132.00	49.20	39.50	52.30	8.01	44.41	74.00	-29.59	Peak	HORIZONTAL
4	12390.00	49.63	39.68	52.38	8.53	45.46	74.00	-28.54	Peak	HORIZONTAL
5	14974.00	48.26	40.93	52.75	9.95	46.39	74.00	-27.61	Peak	HORIZONTAL
6	17065.00	45.17	41.56	52.47	15.49	49.75	74.00	-24.25	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-06-06

EUT

: Bluetooth Speaker

Power Supply

: Battery

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO


Test Mode

: Aux in + 5V/1A load + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
HORIZONTAL

Data: 99

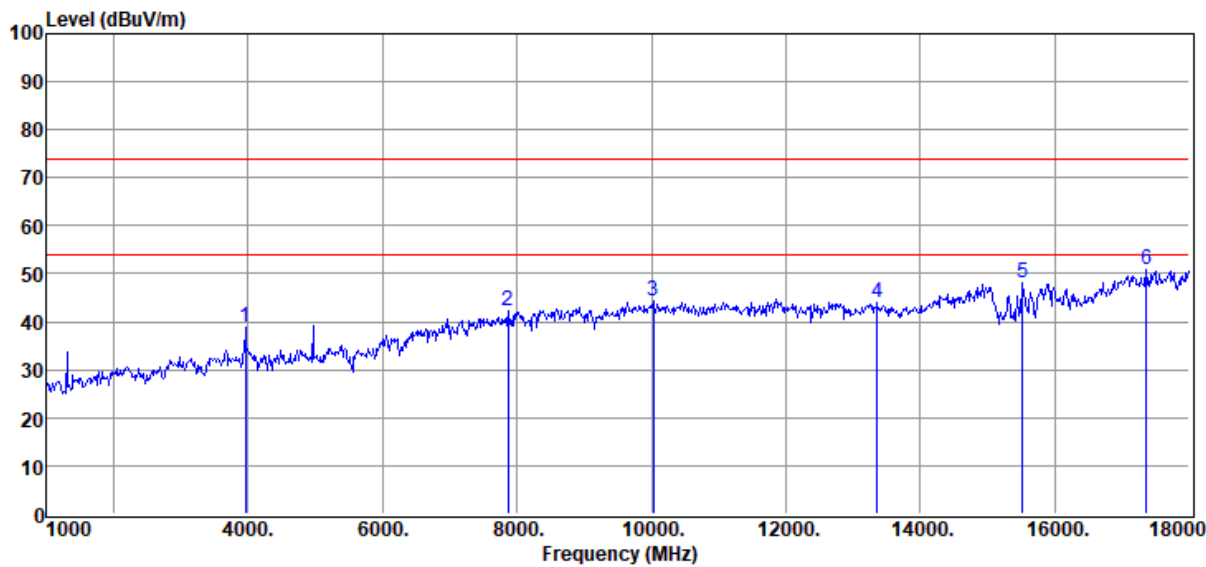

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	57.31	30.66	54.10	4.96	38.83	74.00	-35.17	Peak	HORIZONTAL
2	7868.00	52.41	37.66	54.72	7.04	42.39	74.00	-31.61	Peak	HORIZONTAL
3	10027.00	49.47	39.63	53.08	8.30	44.32	74.00	-29.68	Peak	HORIZONTAL
4	13359.00	49.21	39.94	53.91	8.82	44.06	74.00	-29.94	Peak	HORIZONTAL
5	15518.00	49.16	39.65	51.91	11.21	48.11	74.00	-25.89	Peak	HORIZONTAL
6	17354.00	45.98	41.69	52.36	15.44	50.75	74.00	-23.25	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : Battery


Test Mode : Aux in + 5V/1A load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 100

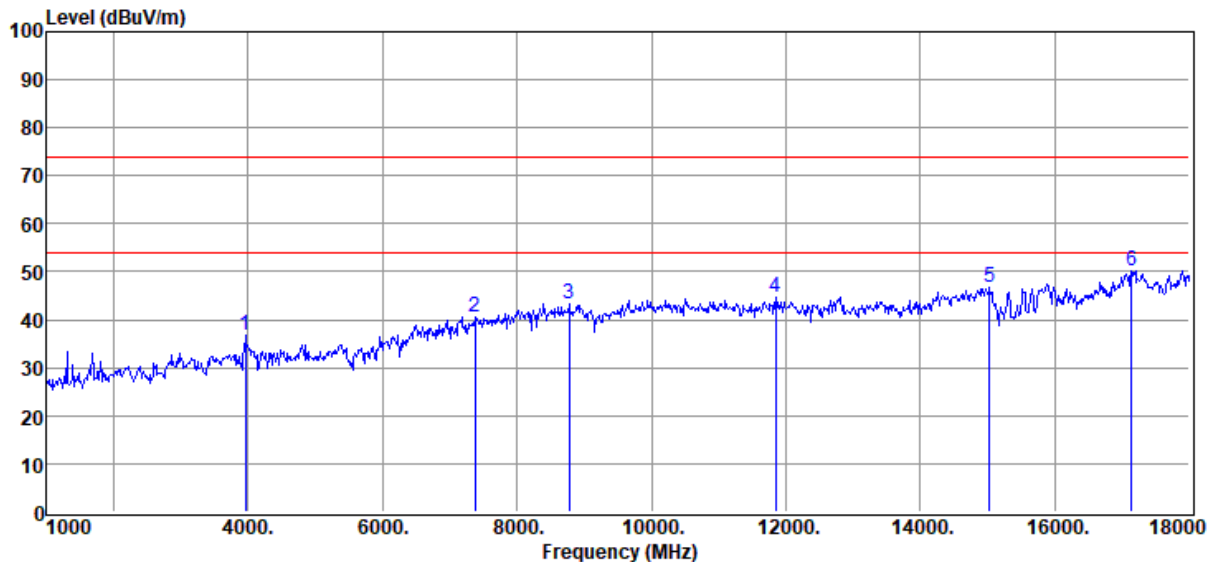

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3958.00	55.40	30.66	54.10	4.96	36.92	74.00	-37.08	Peak	VERTICAL
2	7375.00	51.83	36.85	54.82	6.72	40.58	74.00	-33.42	Peak	VERTICAL
3	8769.00	51.01	38.50	53.92	7.84	43.43	74.00	-30.57	Peak	VERTICAL
4	11846.00	48.58	39.40	51.80	8.34	44.52	74.00	-29.48	Peak	VERTICAL
5	15025.00	48.67	40.85	52.66	10.03	46.89	74.00	-27.11	Peak	VERTICAL
6	17133.00	45.57	41.67	52.45	15.48	50.27	74.00	-23.73	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 101

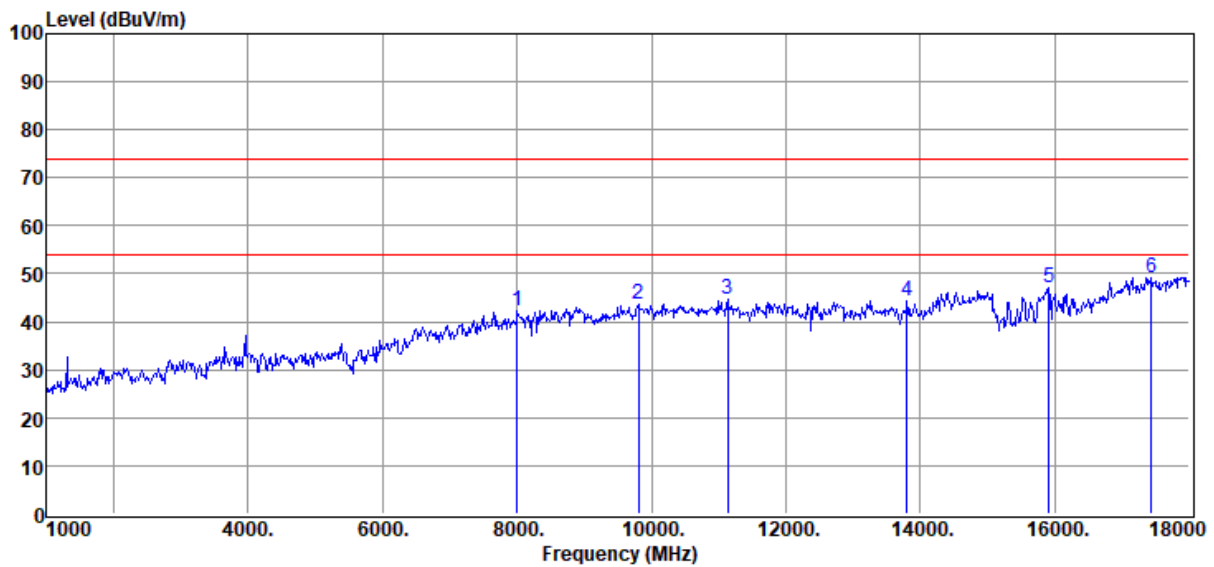

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8004.00	51.76	38.12	54.70	7.12	42.30	74.00	-31.70	Peak	VERTICAL
2	9806.00	49.79	38.82	53.21	8.26	43.66	74.00	-30.34	Peak	VERTICAL
3	11132.00	49.30	39.50	52.30	8.01	44.51	74.00	-29.49	Peak	VERTICAL
4	13801.00	49.69	40.20	54.53	8.95	44.31	74.00	-29.69	Peak	VERTICAL
5	15909.00	47.20	39.06	51.33	12.11	47.04	74.00	-26.96	Peak	VERTICAL
6	17439.00	44.27	41.80	52.32	15.42	49.17	74.00	-24.83	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#**D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6****Test Date** : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 102

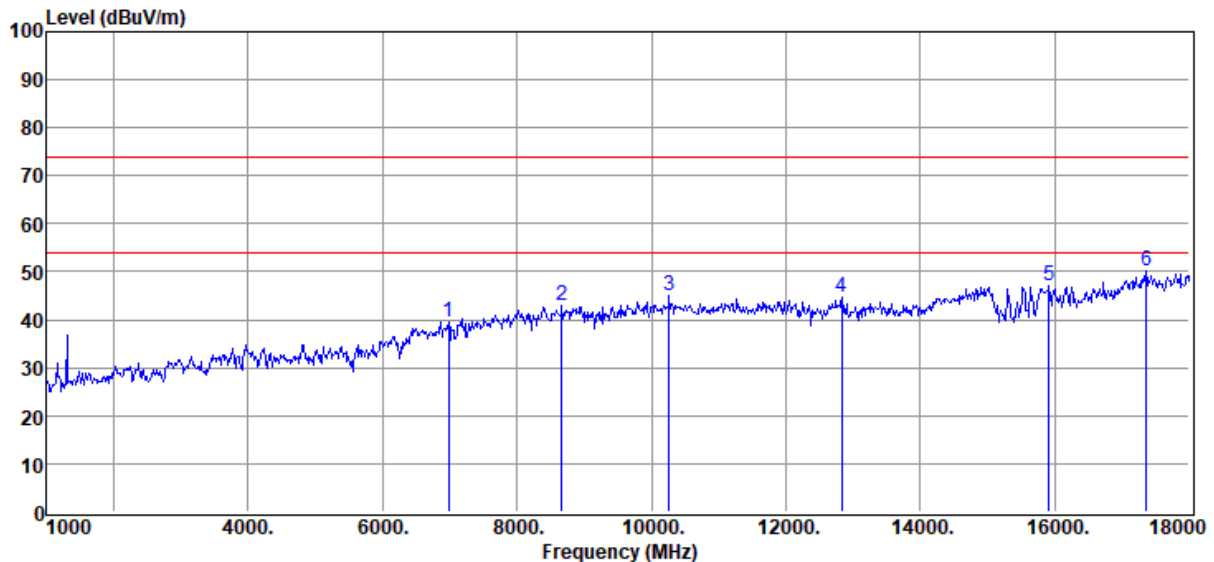

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6984.00	52.00	36.00	54.90	6.45	39.55	74.00	-34.45	Peak	HORIZONTAL
2	8667.00	50.86	38.53	54.02	7.75	43.12	74.00	-30.88	Peak	HORIZONTAL
3	10265.00	49.94	39.63	52.91	8.21	44.87	74.00	-29.13	Peak	HORIZONTAL
4	12832.00	48.94	40.03	53.12	8.67	44.52	74.00	-29.48	Peak	HORIZONTAL
5	15909.00	47.15	39.06	51.33	12.11	46.99	74.00	-27.01	Peak	HORIZONTAL
6	17354.00	45.38	41.69	52.36	15.44	50.15	74.00	-23.85	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 103

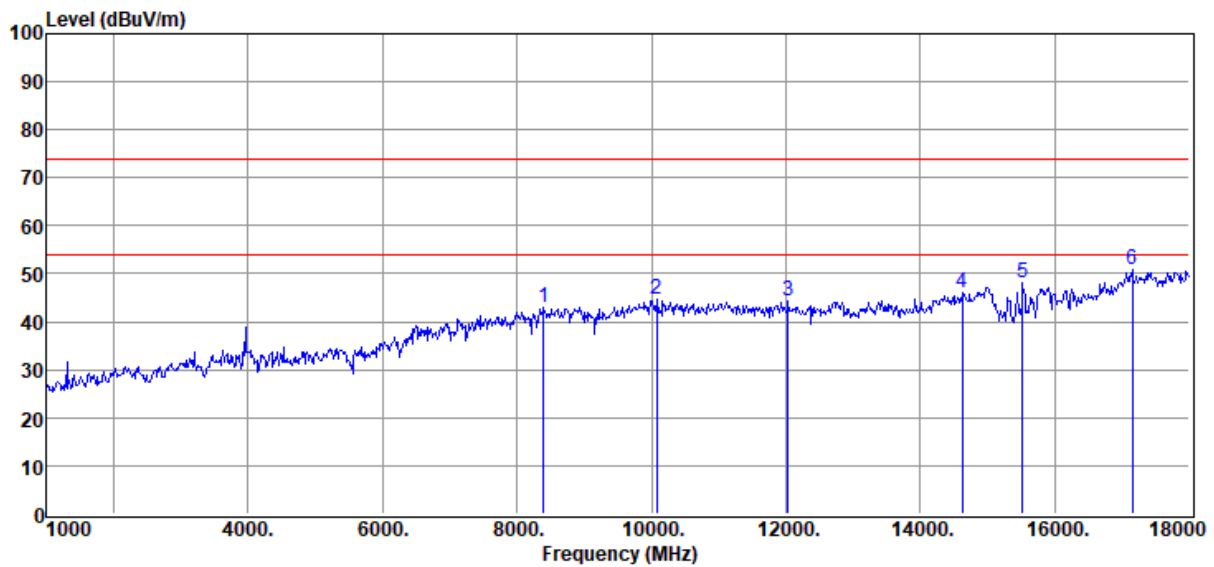

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8395.00	51.28	38.39	54.29	7.50	42.88	74.00	-31.12	Peak	HORIZONTAL
2	10078.00	49.66	39.68	53.04	8.28	44.58	74.00	-29.42	Peak	HORIZONTAL
3	12033.00	48.28	39.40	51.76	8.42	44.34	74.00	-29.66	Peak	HORIZONTAL
4	14617.00	49.19	40.70	53.49	9.61	46.01	74.00	-27.99	Peak	HORIZONTAL
5	15518.00	49.02	39.65	51.91	11.21	47.97	74.00	-26.03	Peak	HORIZONTAL
6	17150.00	46.01	41.65	52.44	15.47	50.69	74.00	-23.31	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-06-06**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The first: FG4CELL21201

Data: 104

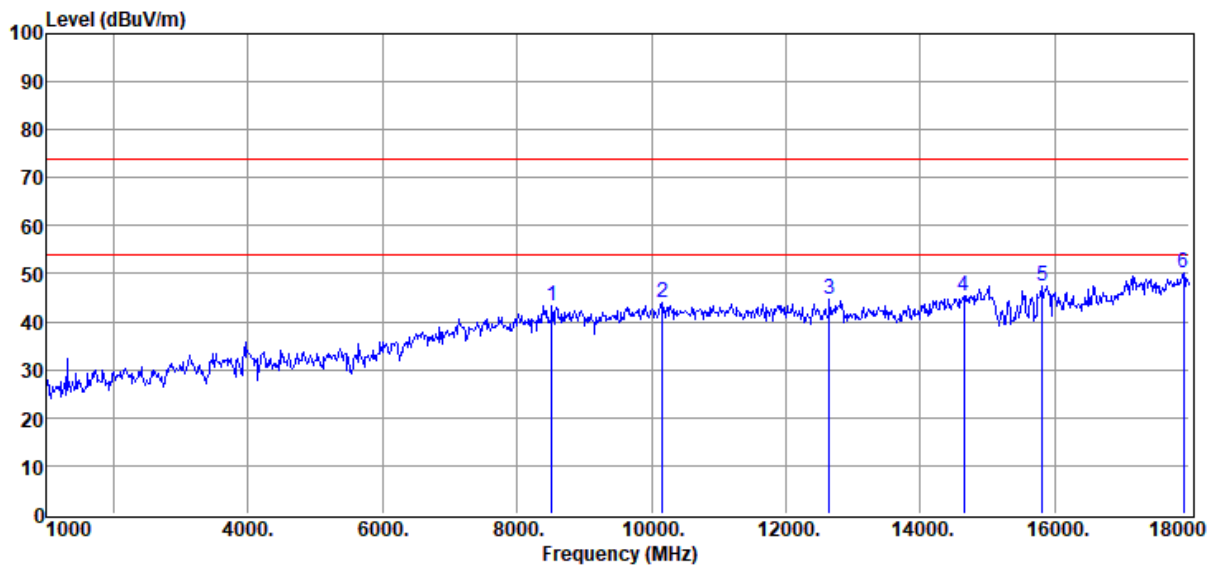

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	8514.00	51.58	38.37	54.17	7.61	43.39	74.00	-30.61	Peak	VERTICAL
2	10163.00	48.99	39.57	52.98	8.25	43.83	74.00	-30.17	Peak	VERTICAL
3	12645.00	49.25	39.59	52.81	8.61	44.64	74.00	-29.36	Peak	VERTICAL
4	14651.00	48.49	40.70	53.42	9.64	45.41	74.00	-28.59	Peak	VERTICAL
5	15807.00	47.62	39.38	51.48	11.88	47.40	74.00	-26.60	Peak	VERTICAL
6	17915.00	41.66	45.18	52.13	15.34	50.05	74.00	-23.95	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Adapter charging + Aux in + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 105

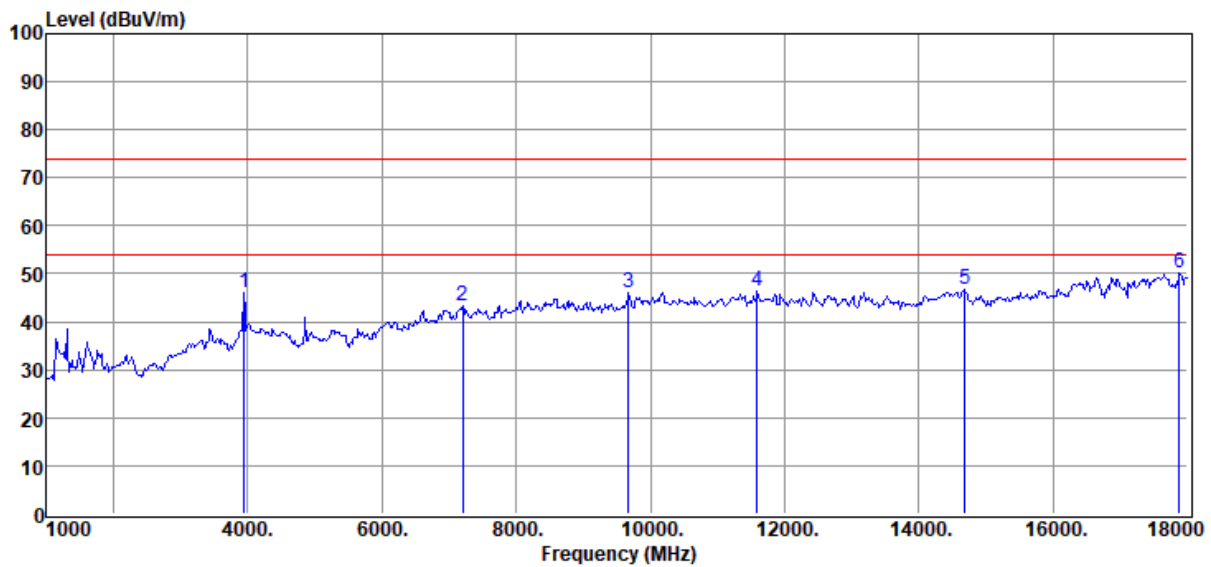

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3941.00	64.60	30.56	54.09	4.96	46.03	74.00	-27.97	Peak	VERTICAL
2	7205.00	54.59	36.84	54.86	6.60	43.17	74.00	-30.83	Peak	VERTICAL
3	9670.00	52.76	38.40	53.29	8.23	46.10	74.00	-27.90	Peak	VERTICAL
4	11591.00	50.71	39.29	51.98	8.23	46.25	74.00	-27.75	Peak	VERTICAL
5	14685.00	49.68	40.70	53.35	9.67	46.70	74.00	-27.30	Peak	VERTICAL
6	17881.00	42.55	44.56	52.15	15.35	50.31	74.00	-23.69	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-08-26

EUT

: Bluetooth Speaker

Power Supply

: AC 120V/60Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Adapter charging + Aux in + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
HORIZONTAL

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Data: 106

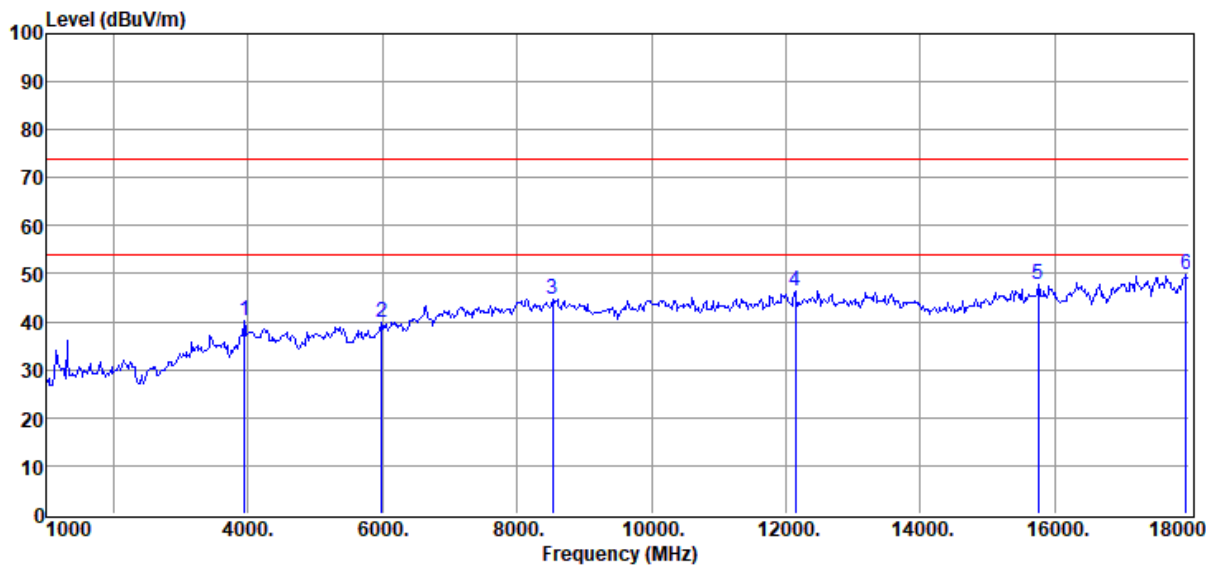

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	3941.00	58.67	30.56	54.09	4.96	40.10	74.00	-33.90	Peak	HORIZONTAL
2	5981.00	55.24	33.64	55.09	6.04	39.83	74.00	-34.17	Peak	HORIZONTAL
3	8531.00	53.02	38.34	54.15	7.63	44.84	74.00	-29.16	Peak	HORIZONTAL
4	12135.00	50.57	39.44	51.94	8.45	46.52	74.00	-27.48	Peak	HORIZONTAL
5	15756.00	48.34	39.22	51.56	11.76	47.76	74.00	-26.24	Peak	HORIZONTAL
6	17949.00	40.85	45.59	52.12	15.34	49.66	74.00	-24.34	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Aux in + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 107

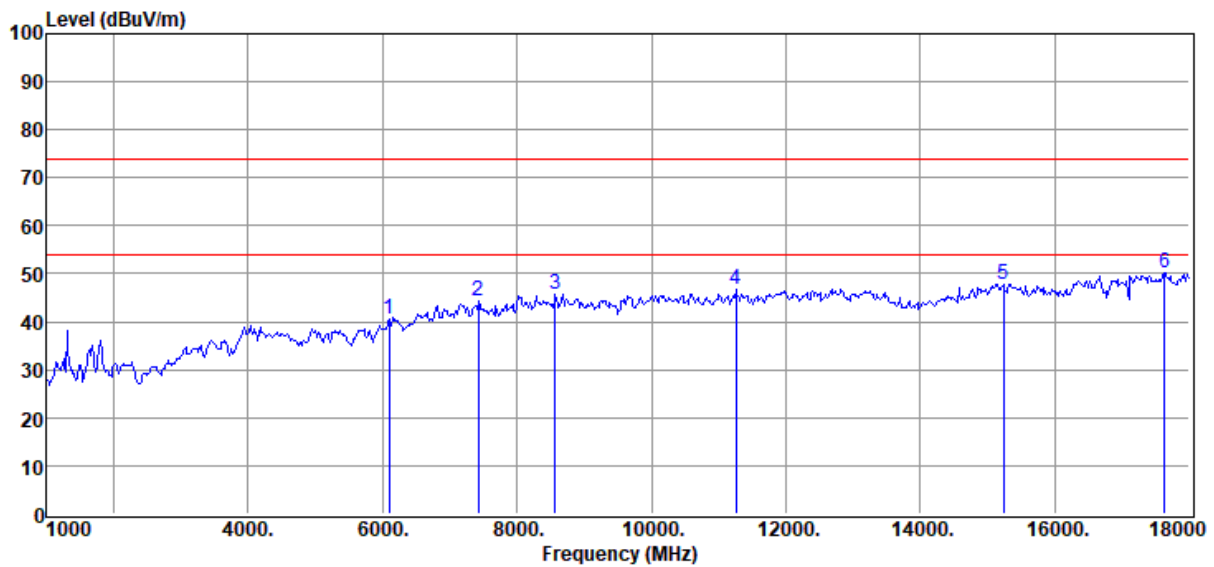

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6100.00	55.64	33.80	55.08	6.09	40.45	74.00	-33.55	Peak	HORIZONTAL
2	7426.00	55.27	36.99	54.81	6.75	44.20	74.00	-29.80	Peak	HORIZONTAL
3	8565.00	53.70	38.36	54.12	7.66	45.60	74.00	-28.40	Peak	HORIZONTAL
4	11251.00	51.43	39.50	52.22	8.07	46.78	74.00	-27.22	Peak	HORIZONTAL
5	15229.00	49.24	40.51	52.35	10.52	47.92	74.00	-26.08	Peak	HORIZONTAL
6	17626.00	45.04	42.10	52.25	15.39	50.28	74.00	-23.72	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-08-26

EUT

: Bluetooth Speaker

Power Supply

: AC 240V/50Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO


Test Mode

: Adapter charging + Aux in + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
VERTICAL

Data: 108

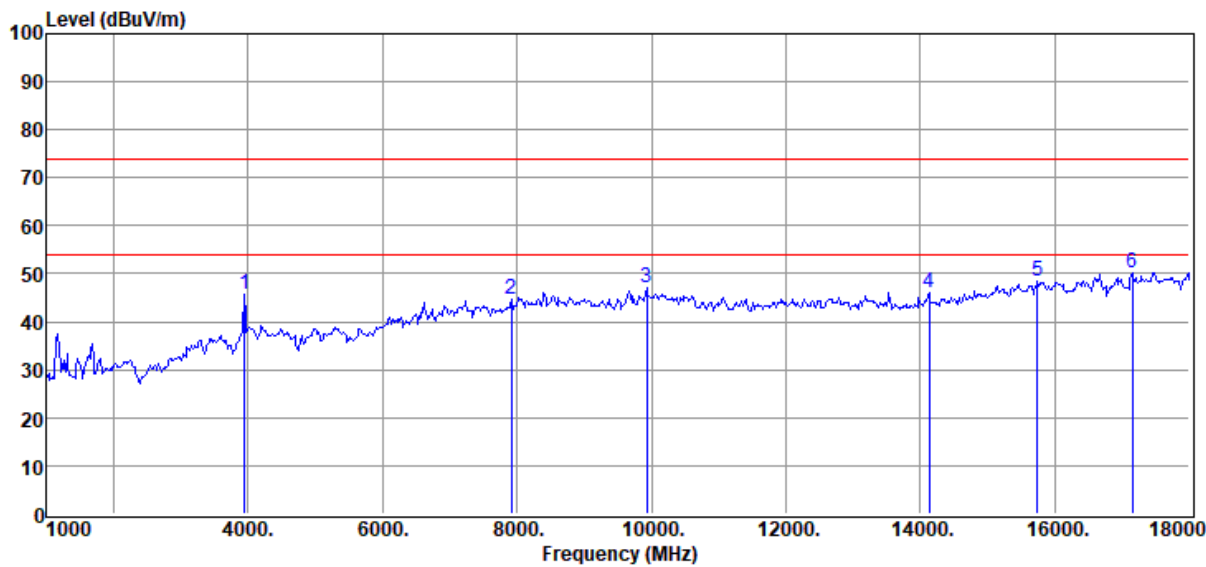

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3941.00	64.27	30.56	54.09	4.96	45.70	74.00	-28.30	Peak	VERTICAL
2	7919.00	54.60	37.64	54.72	7.07	44.59	74.00	-29.41	Peak	VERTICAL
3	9925.00	52.72	39.05	53.14	8.29	46.92	74.00	-27.08	Peak	VERTICAL
4	14124.00	50.90	40.57	54.53	9.12	46.06	74.00	-27.94	Peak	VERTICAL
5	15739.00	49.14	39.16	51.58	11.72	48.44	74.00	-25.56	Peak	VERTICAL
6	17150.00	45.49	41.65	52.44	15.47	50.17	74.00	-23.83	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 109

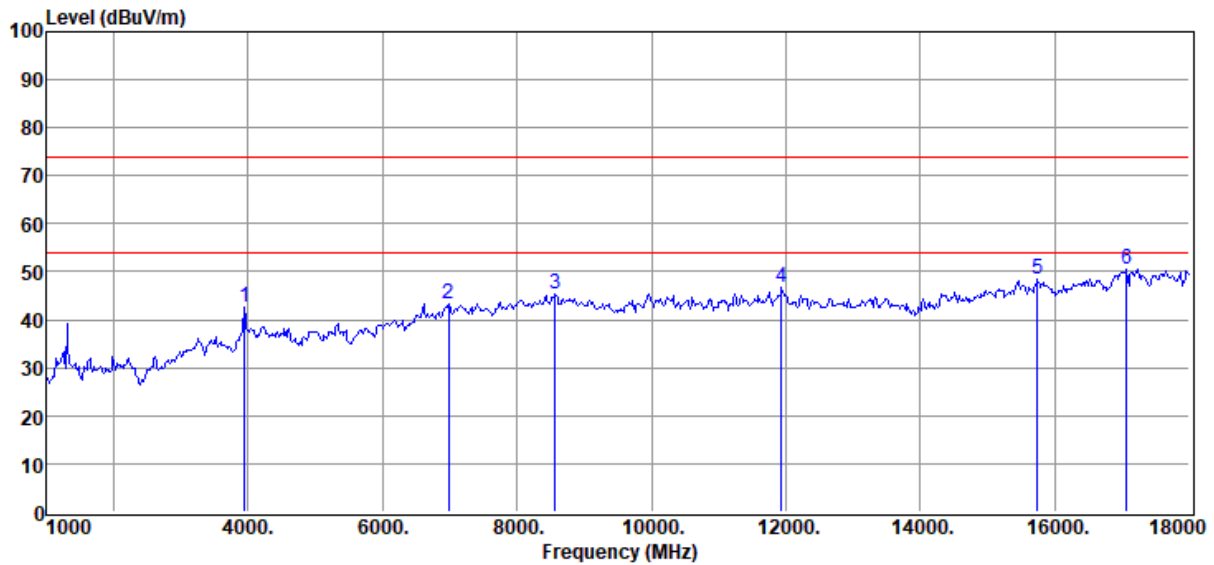

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3941.00	61.16	30.56	54.09	4.96	42.59	74.00	-31.41	Peak	VERTICAL
2	6984.00	55.82	36.00	54.90	6.45	43.37	74.00	-30.63	Peak	VERTICAL
3	8565.00	53.40	38.36	54.12	7.66	45.30	74.00	-28.70	Peak	VERTICAL
4	11931.00	50.63	39.40	51.75	8.38	46.66	74.00	-27.34	Peak	VERTICAL
5	15739.00	49.03	39.16	51.58	11.72	48.33	74.00	-25.67	Peak	VERTICAL
6	17065.00	45.84	41.56	52.47	15.49	50.42	74.00	-23.58	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 110

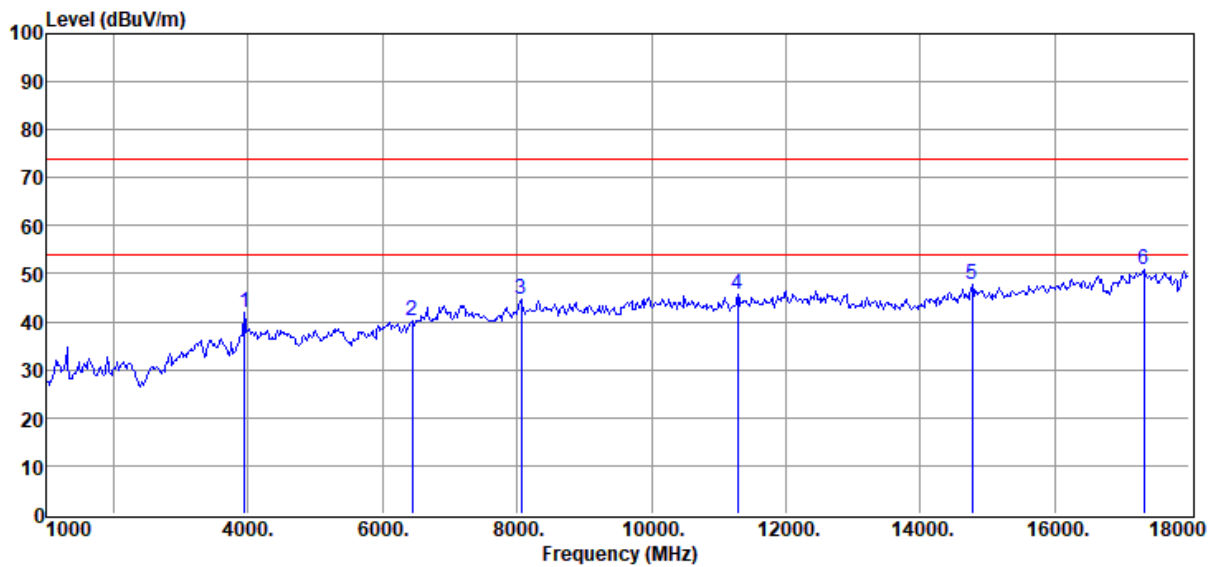

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3941.00	60.47	30.56	54.09	4.96	41.90	74.00	-32.10	Peak	HORIZONTAL
2	6440.00	54.46	34.68	55.01	6.23	40.36	74.00	-33.64	Peak	HORIZONTAL
3	8055.00	53.95	38.27	54.64	7.17	44.75	74.00	-29.25	Peak	HORIZONTAL
4	11285.00	50.26	39.50	52.19	8.09	45.66	74.00	-28.34	Peak	HORIZONTAL
5	14770.00	50.33	40.84	53.17	9.75	47.75	74.00	-26.25	Peak	HORIZONTAL
6	17320.00	45.99	41.76	52.37	15.44	50.82	74.00	-23.18	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The first: FG4CELL21201

Data: 111

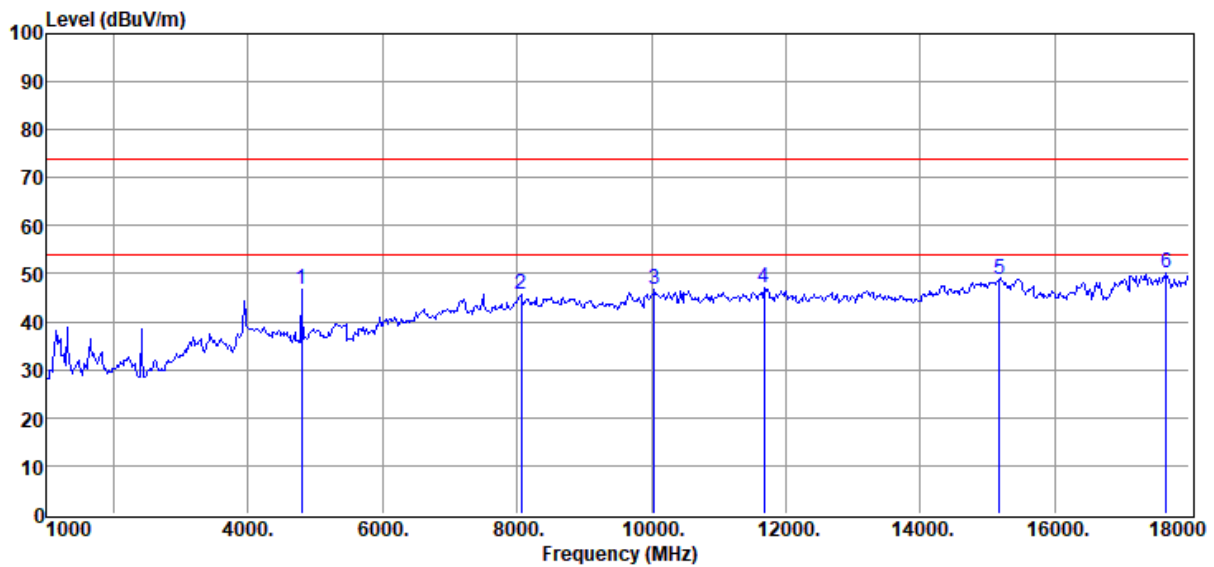

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4791.00	63.77	31.43	54.42	5.79	46.57	74.00	-27.43	Peak	HORIZONTAL
2	8055.00	55.03	38.27	54.64	7.17	45.83	74.00	-28.17	Peak	HORIZONTAL
3	10044.00	51.85	39.64	53.07	8.29	46.71	74.00	-27.29	Peak	HORIZONTAL
4	11676.00	51.39	39.30	51.92	8.27	47.04	74.00	-26.96	Peak	HORIZONTAL
5	15178.00	50.35	40.62	52.43	10.40	48.94	74.00	-25.06	Peak	HORIZONTAL
6	17660.00	44.74	42.24	52.23	15.39	50.14	74.00	-23.86	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Adapter charging + Aux in + Earphone
+ MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 112

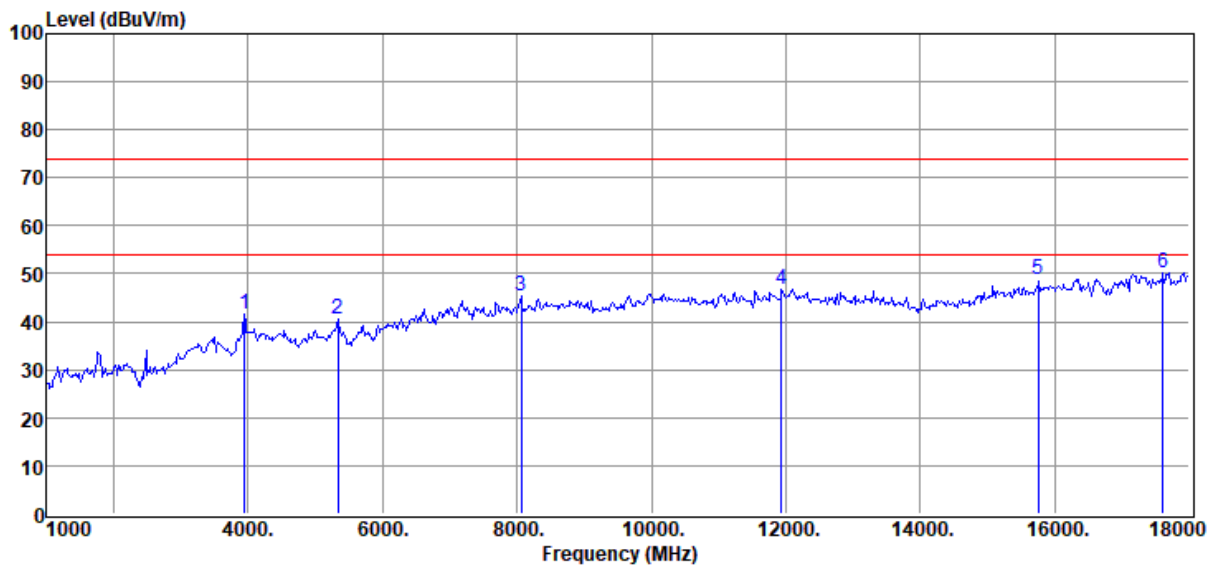

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3941.00	60.27	30.56	54.09	4.96	41.70	74.00	-32.30	Peak	VERTICAL
2	5335.00	56.09	33.14	54.71	6.01	40.53	74.00	-33.47	Peak	VERTICAL
3	8055.00	54.42	38.27	54.64	7.17	45.22	74.00	-28.78	Peak	VERTICAL
4	11931.00	50.68	39.40	51.75	8.38	46.71	74.00	-27.29	Peak	VERTICAL
5	15756.00	49.43	39.22	51.56	11.76	48.85	74.00	-25.15	Peak	VERTICAL
6	17609.00	45.03	42.04	52.25	15.40	50.22	74.00	-23.78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-08-26

EUT

: Bluetooth Speaker

Power Supply

: AC 120V/60Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Adapter charging + Bluetooth + Earphone + TWS + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/ VERTICAL

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Data: 113

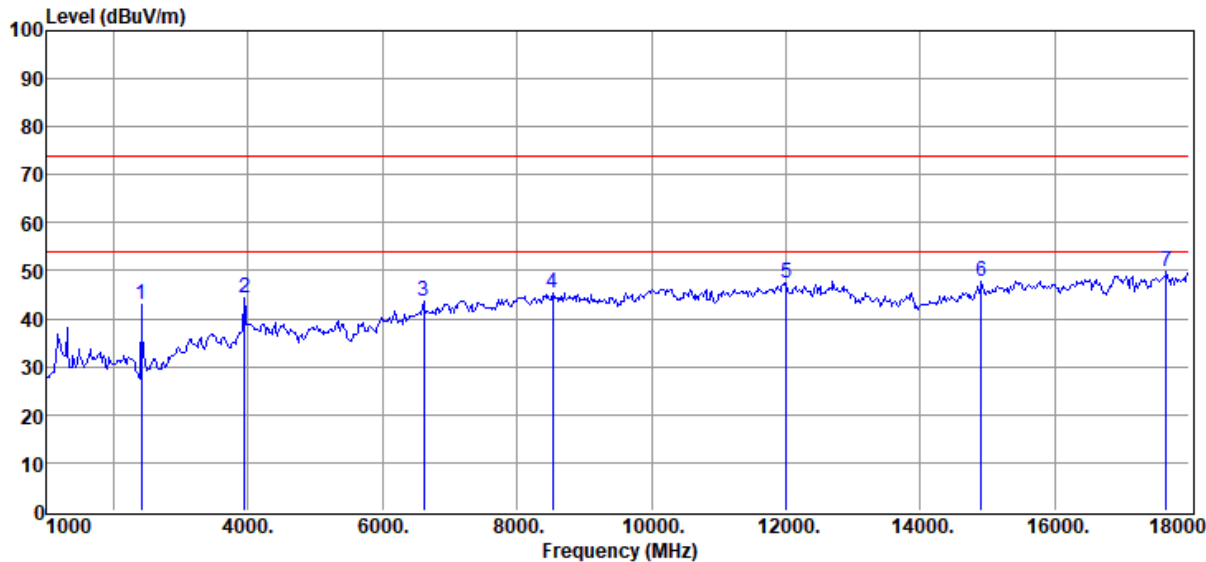

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	65.24	27.20	53.89	4.33	42.88	Carrier frequency			VERTICAL
2	3941.00	63.06	30.56	54.09	4.96	44.49	74.00	-29.51	Peak	VERTICAL
3	6610.00	57.46	34.96	54.97	6.30	43.75	74.00	-30.25	Peak	VERTICAL
4	8531.00	53.51	38.34	54.15	7.63	45.33	74.00	-28.67	Peak	VERTICAL
5	11999.00	51.45	39.40	51.70	8.41	47.56	74.00	-26.44	Peak	VERTICAL
6	14906.00	49.78	40.99	52.89	9.88	47.76	74.00	-26.24	Peak	VERTICAL
7	17660.00	44.39	42.24	52.23	15.39	49.79	74.00	-24.21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-08-26

EUT

: Bluetooth Speaker

Power Supply

: AC 120V/60Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The first: FG4CELL21201

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Adapter charging + Bluetooth + Earphone + TWS + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/ HORIZONTAL

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Data: 114

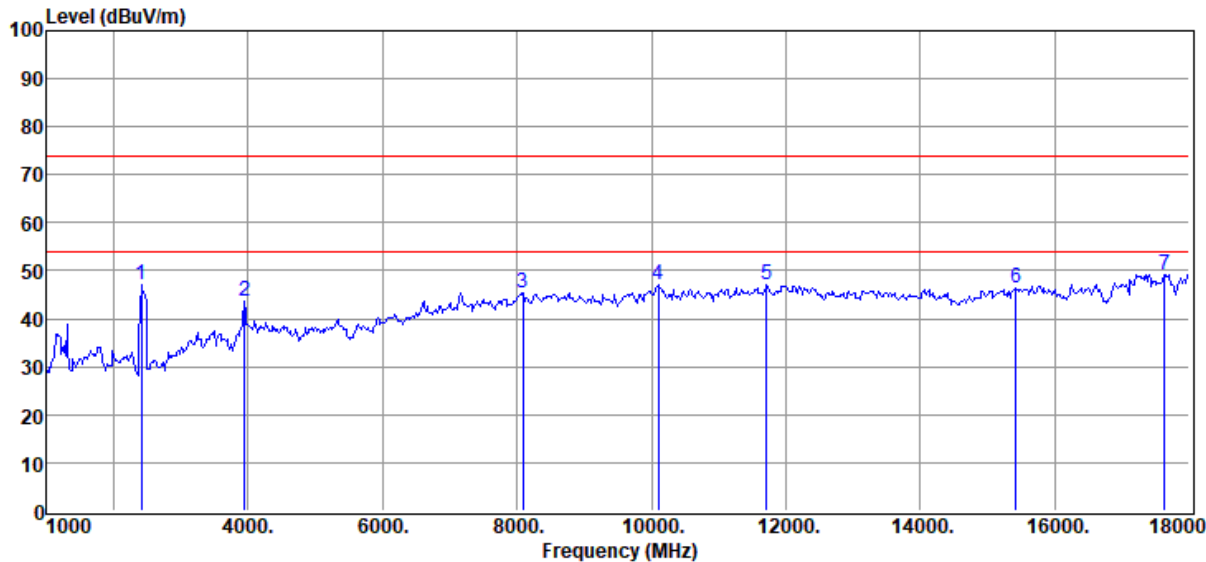

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	69.56	27.20	53.89	4.33	47.20	Carrier frequency			HORIZONTAL
2	3941.00	62.09	30.56	54.09	4.96	43.52	74.00	-30.48	Peak	HORIZONTAL
3	8089.00	54.82	38.07	54.61	7.21	45.49	74.00	-28.51	Peak	HORIZONTAL
4	10095.00	52.14	39.70	53.03	8.27	47.08	74.00	-26.92	Peak	HORIZONTAL
5	11710.00	51.44	39.31	51.90	8.28	47.13	74.00	-26.87	Peak	HORIZONTAL
6	15416.00	47.60	39.95	52.06	10.97	46.46	74.00	-27.54	Peak	HORIZONTAL
7	17626.00	44.06	42.10	52.25	15.39	49.30	74.00	-24.70	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 115

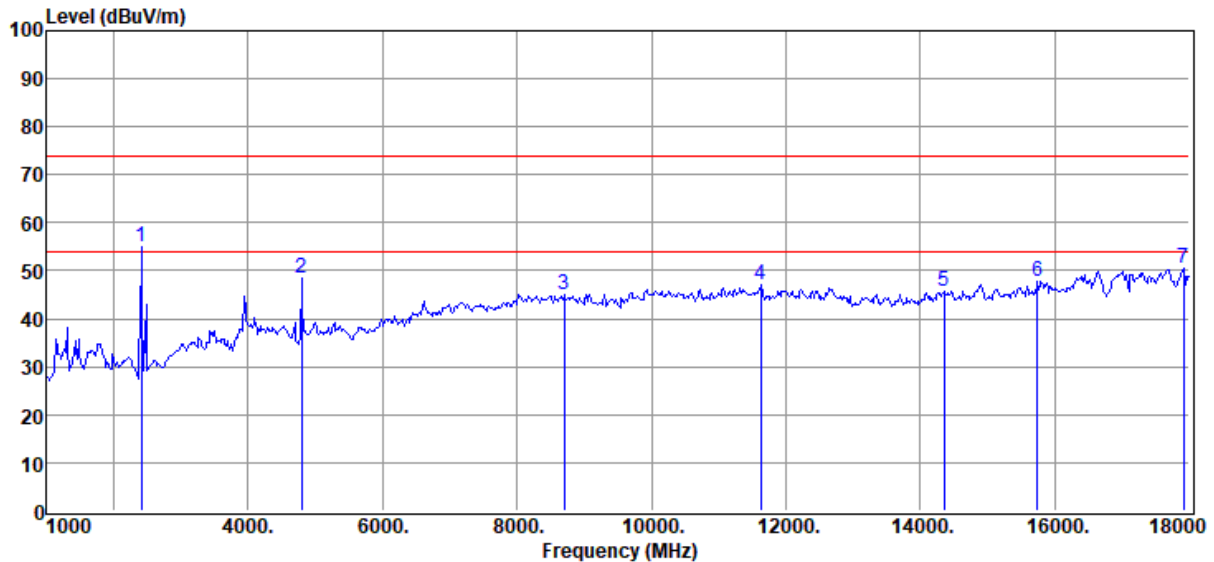

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	77.20	27.20	53.89	4.33	54.84	Carrier frequency			HORIZONTAL
2	4791.00	65.81	31.43	54.42	5.79	48.61	74.00	-25.39	Peak	HORIZONTAL
3	8701.00	52.67	38.60	53.99	7.78	45.06	74.00	-28.94	Peak	HORIZONTAL
4	11625.00	51.34	39.30	51.96	8.24	46.92	74.00	-27.08	Peak	HORIZONTAL
5	14345.00	49.84	40.70	54.06	9.34	45.82	74.00	-28.18	Peak	HORIZONTAL
6	15739.00	48.59	39.16	51.58	11.72	47.89	74.00	-26.11	Peak	HORIZONTAL
7	17915.00	42.25	45.18	52.13	15.34	50.64	74.00	-23.36	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Bluetooth +
Earphone + TWS + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 116

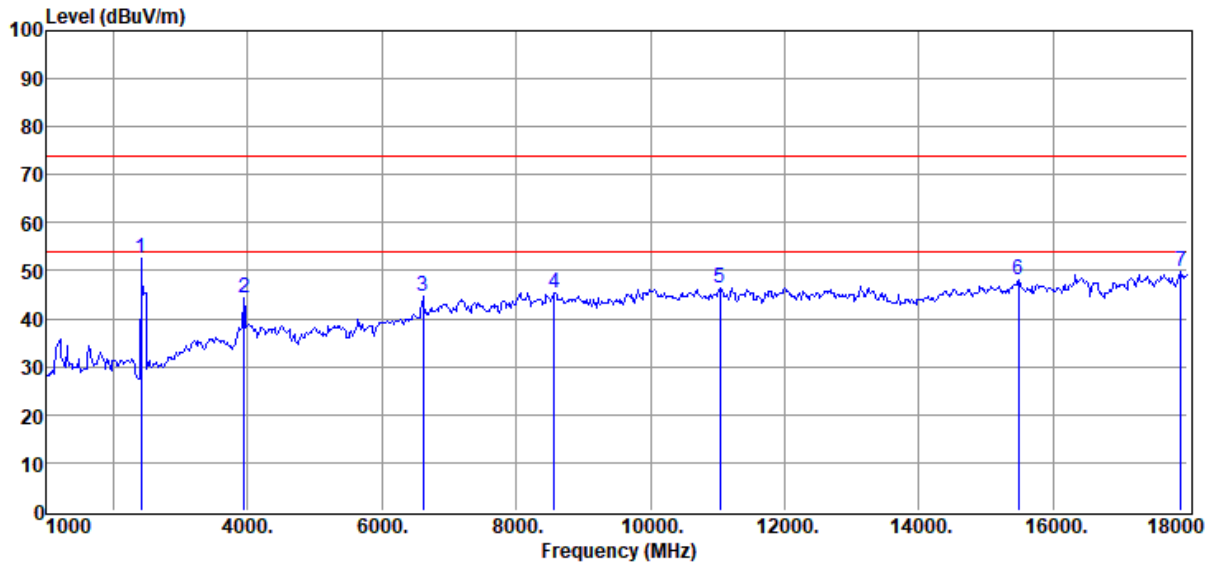

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	74.96	27.20	53.89	4.33	52.60	Carrier frequency			VERTICAL
2	3941.00	62.87	30.56	54.09	4.96	44.30	74.00	29.70	Peak	VERTICAL
3	6610.00	58.24	34.96	54.97	6.30	44.53	74.00	29.47	Peak	VERTICAL
4	8565.00	53.52	38.36	54.12	7.66	45.42	74.00	28.58	Peak	VERTICAL
5	11030.00	50.94	39.71	52.38	7.96	46.23	74.00	27.77	Peak	VERTICAL
6	15484.00	49.13	39.75	51.96	11.13	48.05	74.00	25.95	Peak	VERTICAL
7	17898.00	41.83	44.95	52.14	15.35	49.99	74.00	24.01	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 117

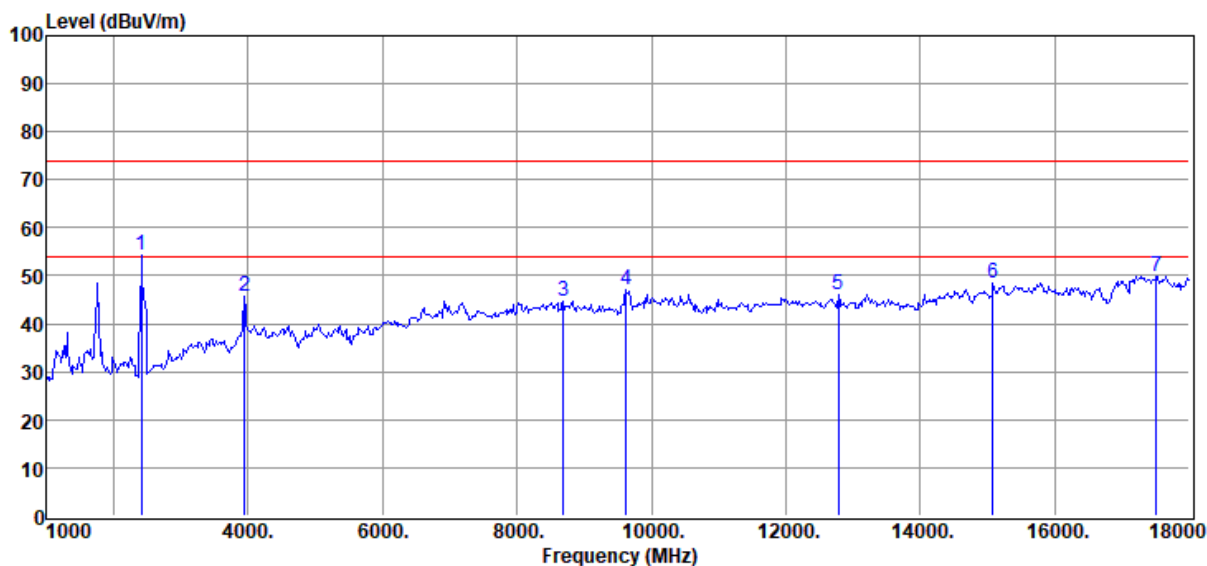

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	76.54	27.20	53.89	4.33	54.18	Carrier frequency			VERTICAL
2	3941.00	64.44	30.56	54.09	4.96	45.87	74.00	-28.13	Peak	VERTICAL
3	8684.00	52.31	38.57	54.00	7.77	44.65	74.00	-29.35	Peak	VERTICAL
4	9619.00	53.90	38.15	53.32	8.21	46.94	74.00	-27.06	Peak	VERTICAL
5	12781.00	50.42	39.94	53.04	8.65	45.97	74.00	-28.03	Peak	VERTICAL
6	15076.00	50.01	40.75	52.58	10.15	48.33	74.00	-25.67	Peak	VERTICAL
7	17507.00	44.60	42.09	52.29	15.41	49.81	74.00	-24.19	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 118

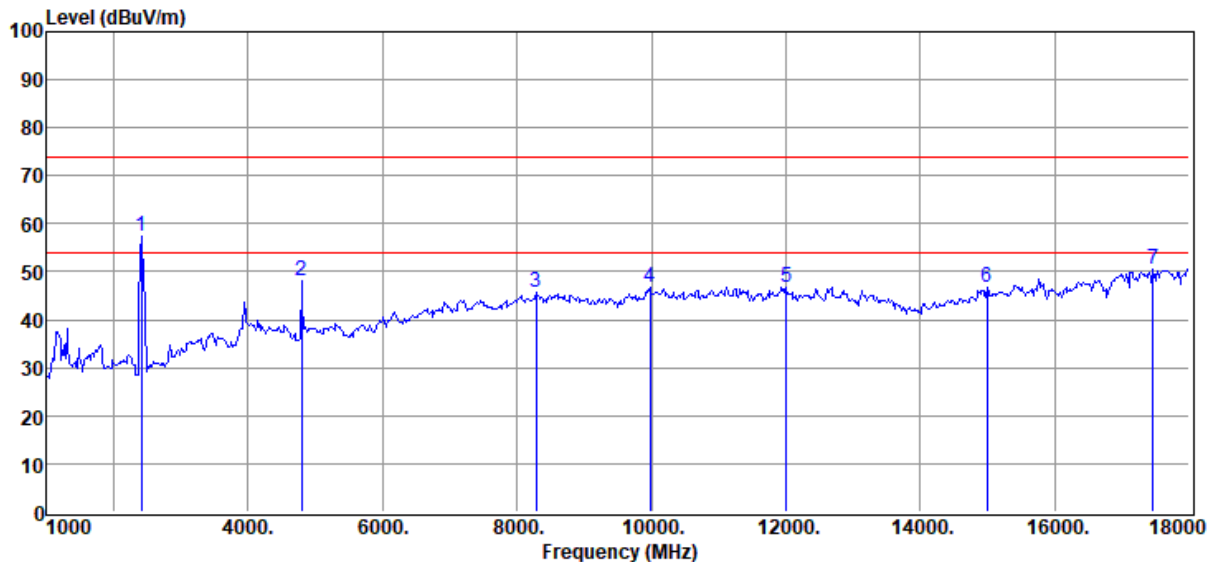

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	79.86	27.20	53.89	4.33	57.50	Carrier frequency			HORIZONTAL
2	4791.00	65.30	31.43	54.42	5.79	48.10	74.00	-25.90	Peak	HORIZONTAL
3	8276.00	54.66	38.20	54.41	7.39	45.84	74.00	-28.16	Peak	HORIZONTAL
4	9976.00	52.12	39.31	53.11	8.30	46.62	74.00	-27.38	Peak	HORIZONTAL
5	11999.00	50.76	39.40	51.70	8.41	46.87	74.00	-27.13	Peak	HORIZONTAL
6	14991.00	48.50	40.91	52.72	9.96	46.65	74.00	-27.35	Peak	HORIZONTAL
7	17456.00	45.44	41.88	52.31	15.42	50.43	74.00	-23.57	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The first: FG4CELL21201

Data: 119

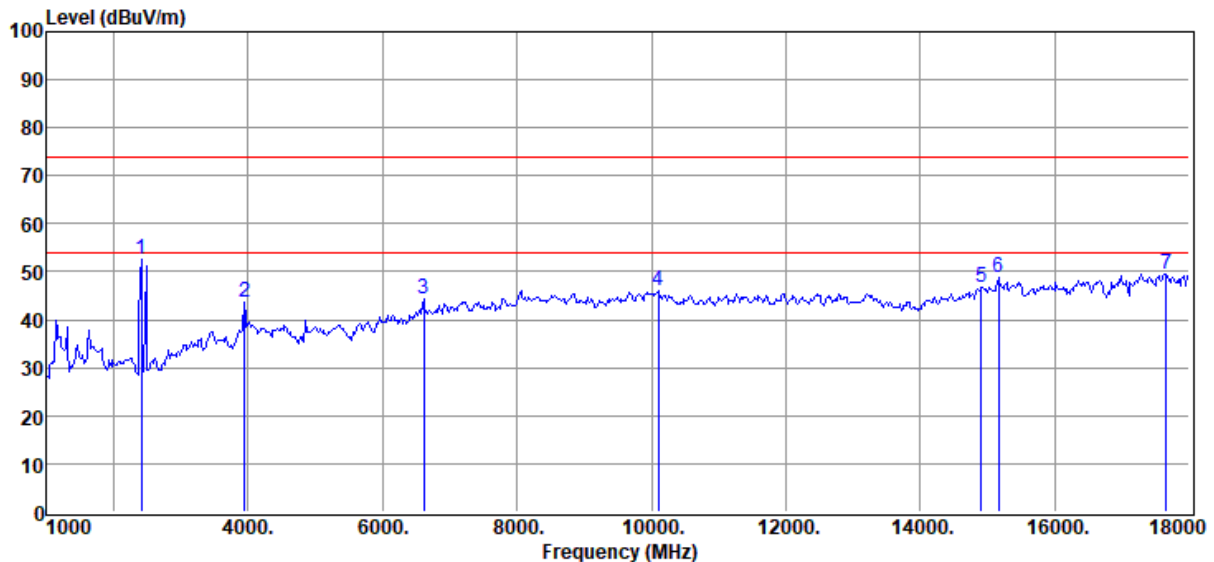

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	74.82	27.20	53.89	4.33	52.46	Carrier frequency			HORIZONTAL
2	3941.00	62.13	30.56	54.09	4.96	43.56	74.00	-30.44	Peak	HORIZONTAL
3	6610.00	58.08	34.96	54.97	6.30	44.37	74.00	-29.63	Peak	HORIZONTAL
4	10095.00	51.00	39.70	53.03	8.27	45.94	74.00	-28.06	Peak	HORIZONTAL
5	14906.00	48.84	40.99	52.89	9.88	46.82	74.00	-27.18	Peak	HORIZONTAL
6	15161.00	50.24	40.64	52.45	10.36	48.79	74.00	-25.21	Peak	HORIZONTAL
7	17660.00	44.13	42.24	52.23	15.39	49.53	74.00	-24.47	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\RE-H.EM6

Test Date : 2025-08-26

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The first: FG4CELL21201

Data: 120

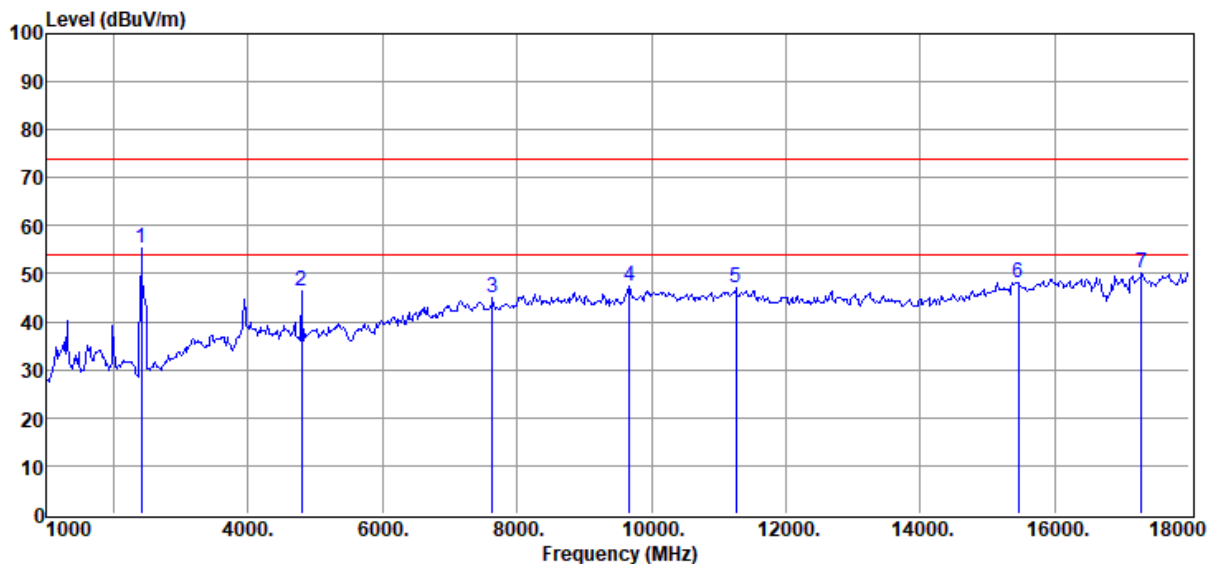

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2411.00	77.62	27.20	53.89	4.33	55.26	Carrier frequency			VERTICAL
2	4791.00	63.55	31.43	54.42	5.79	46.35	74.00	-27.65	Peak	VERTICAL
3	7630.00	55.68	37.12	54.77	6.89	44.92	74.00	-29.08	Peak	VERTICAL
4	9670.00	54.09	38.40	53.29	8.23	47.43	74.00	-26.57	Peak	VERTICAL
5	11251.00	51.62	39.50	52.22	8.07	46.97	74.00	-27.03	Peak	VERTICAL
6	15450.00	49.18	39.85	52.01	11.05	48.07	74.00	-25.93	Peak	VERTICAL
7	17286.00	45.44	41.77	52.38	15.45	50.28	74.00	-23.72	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Adapter charging + Aux in + MIC*2 +
Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 161

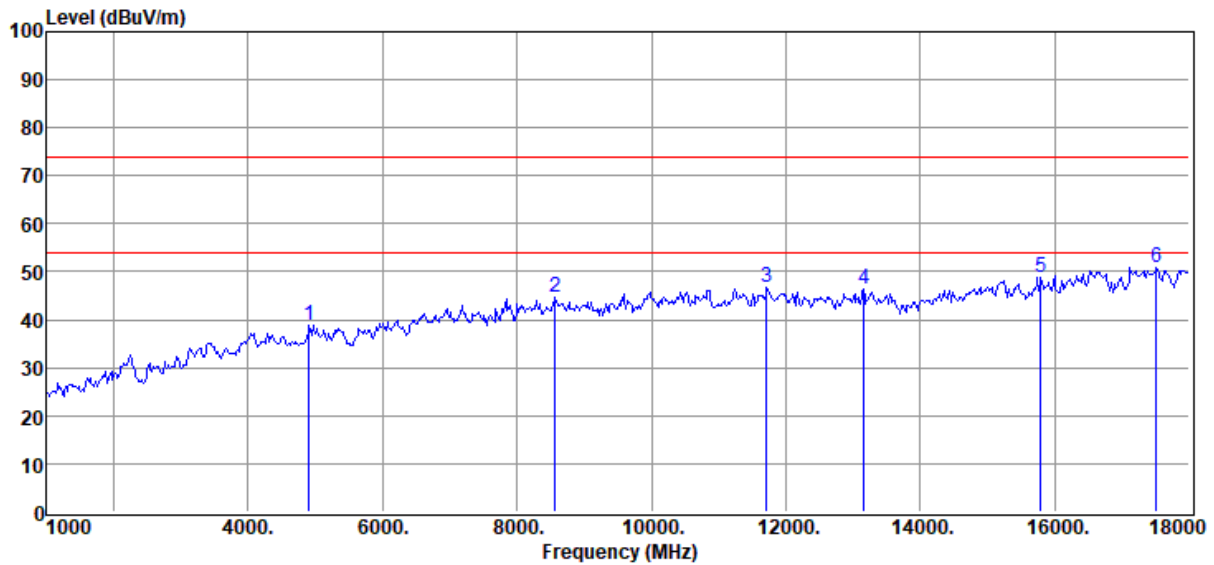

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Margin (dB)	Detector	Polarization
1	4910.00	55.69	31.74	54.47	5.91	38.87	74.00	35.13	Peak	VERTICAL
2	8565.00	52.78	38.36	54.12	7.66	44.68	74.00	29.32	Peak	VERTICAL
3	11710.00	51.15	39.31	51.90	8.28	46.84	74.00	27.16	Peak	VERTICAL
4	13155.00	50.88	40.30	53.62	8.76	46.32	74.00	27.68	Peak	VERTICAL
5	15790.00	49.21	39.36	51.51	11.84	48.90	74.00	25.10	Peak	VERTICAL
6	17507.00	45.71	42.09	52.29	15.41	50.92	74.00	23.08	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 162

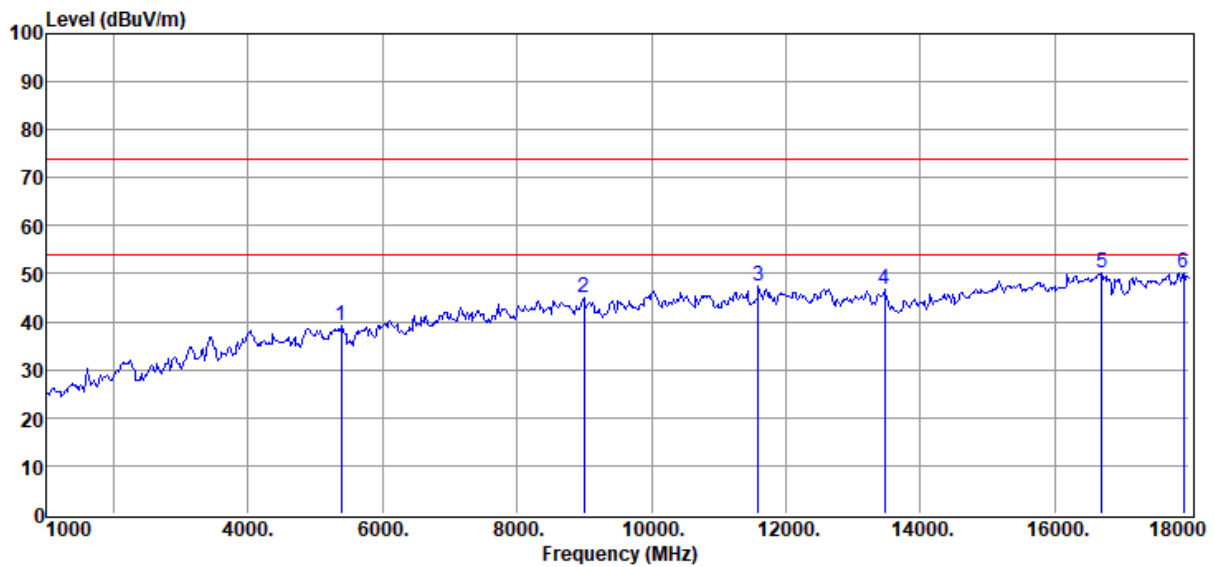

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	5386.00	54.47	33.49	54.74	6.01	39.23	74.00	34.77	Peak	HORIZONTAL
2	8990.00	52.21	38.40	53.71	8.04	44.94	74.00	29.06	Peak	HORIZONTAL
3	11591.00	51.79	39.29	51.98	8.23	47.33	74.00	26.67	Peak	HORIZONTAL
4	13461.00	52.15	39.96	54.06	8.85	46.90	74.00	27.10	Peak	HORIZONTAL
5	16691.00	47.64	40.26	52.11	14.54	50.33	74.00	23.67	Peak	HORIZONTAL
6	17915.00	41.72	45.18	52.13	15.34	50.11	74.00	23.89	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Aux in + MIC*2 +
Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 163

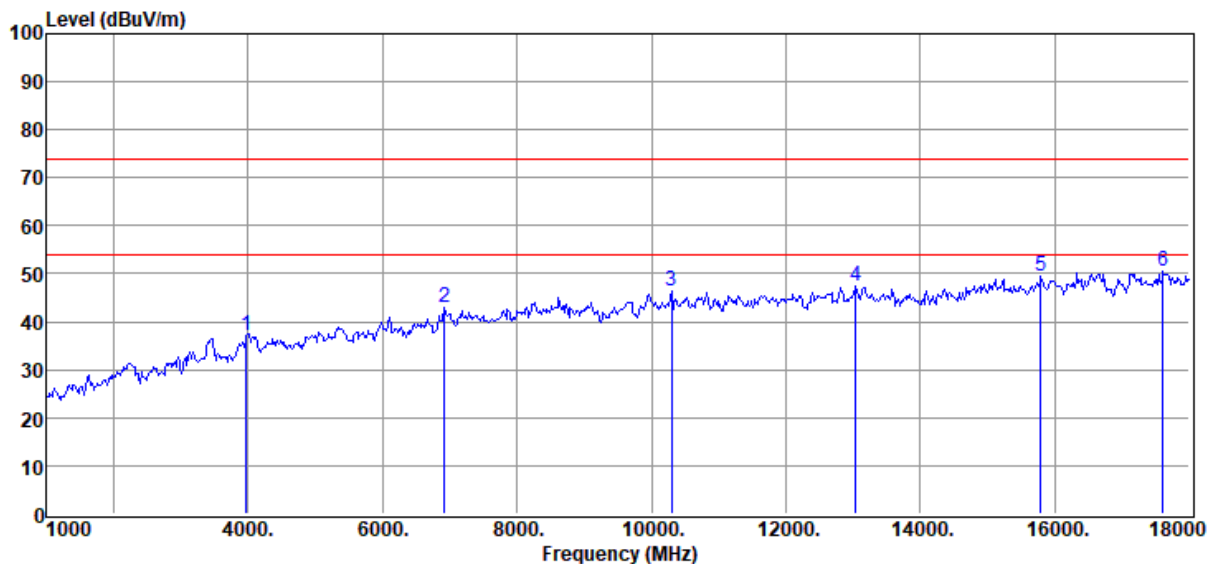

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	3975.00	55.42	30.80	54.10	4.96	37.08	74.00	36.92	Peak	HORIZONTAL
2	6916.00	55.69	35.66	54.92	6.43	42.86	74.00	31.14	Peak	HORIZONTAL
3	10299.00	51.36	39.70	52.88	8.20	46.38	74.00	27.62	Peak	HORIZONTAL
4	13036.00	52.04	40.24	53.45	8.73	47.56	74.00	26.44	Peak	HORIZONTAL
5	15790.00	49.86	39.36	51.51	11.84	49.55	74.00	24.45	Peak	HORIZONTAL
6	17609.00	45.21	42.04	52.25	15.40	50.40	74.00	23.60	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date

: 2025-09-04

Tested By

: Aaron Liu

EUT

: Bluetooth Speaker

Model Number

: BANDBOX TRIO

Power Supply

: AC 240V/50Hz

Test Mode

: Adapter charging + Aux in + MIC*2 + Guitar mode

Condition

: Temp:23.1°C,Humi:62.5%


Antenna/Distance

: 2023 BBHA9120D1#/3m/
VERTICAL

Memo

: The second: FG4CELL21700GP

Data: 164

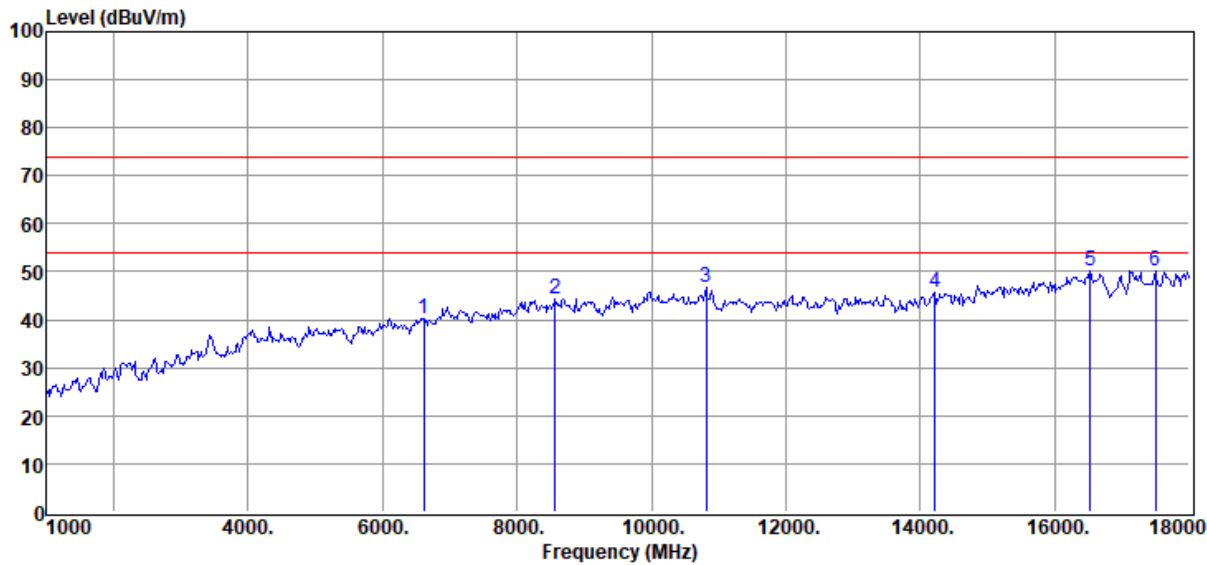

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Margi n (dB)	Detector	Polarization
1	6610.00	53.93	34.96	54.97	6.30	40.22	74.00	33.78	Peak	VERTICAL
2	8565.00	52.51	38.36	54.12	7.66	44.41	74.00	29.59	Peak	VERTICAL
3	10809.00	51.82	39.51	52.53	8.02	46.82	74.00	27.18	Peak	VERTICAL
4	14209.00	50.12	40.79	54.35	9.21	45.77	74.00	28.23	Peak	VERTICAL
5	16521.00	48.26	39.82	51.89	14.00	50.19	74.00	23.81	Peak	VERTICAL
6	17490.00	44.88	42.05	52.30	15.42	50.05	74.00	23.95	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 165

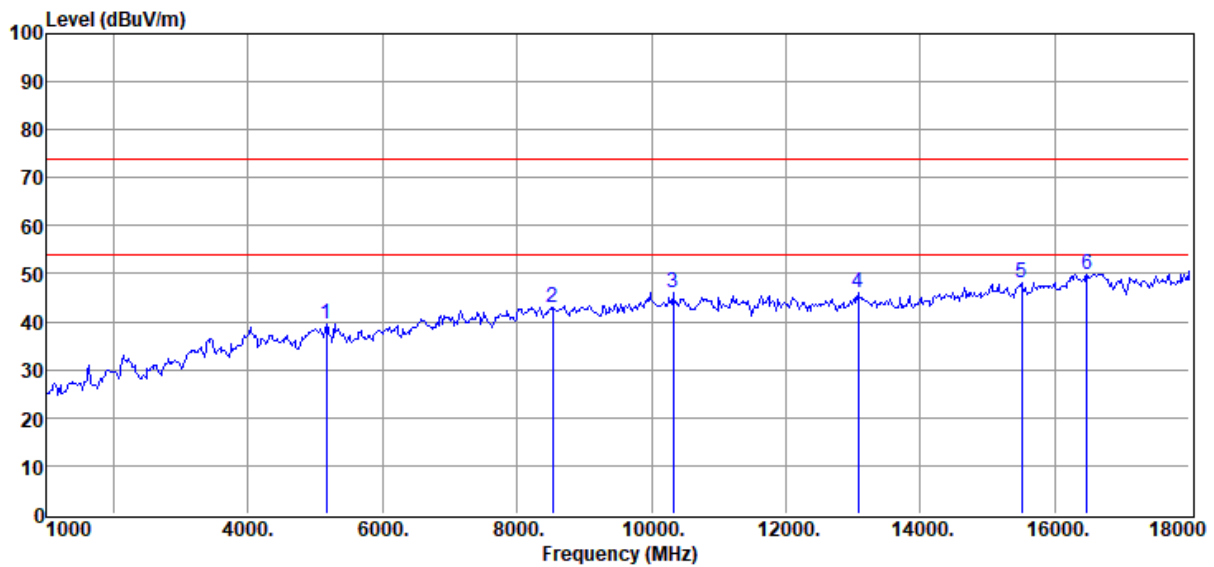

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	5165.00	56.00	32.08	54.61	6.00	39.47	74.00	34.53	Peak	VERTICAL
2	8531.00	51.29	38.34	54.15	7.63	43.11	74.00	30.89	Peak	VERTICAL
3	10316.00	51.06	39.68	52.87	8.19	46.06	74.00	27.94	Peak	VERTICAL
4	13070.00	50.49	40.27	53.50	8.74	46.00	74.00	28.00	Peak	VERTICAL
5	15501.00	49.34	39.70	51.94	11.17	48.27	74.00	25.73	Peak	VERTICAL
6	16470.00	48.22	39.71	51.82	13.84	49.95	74.00	24.05	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 166

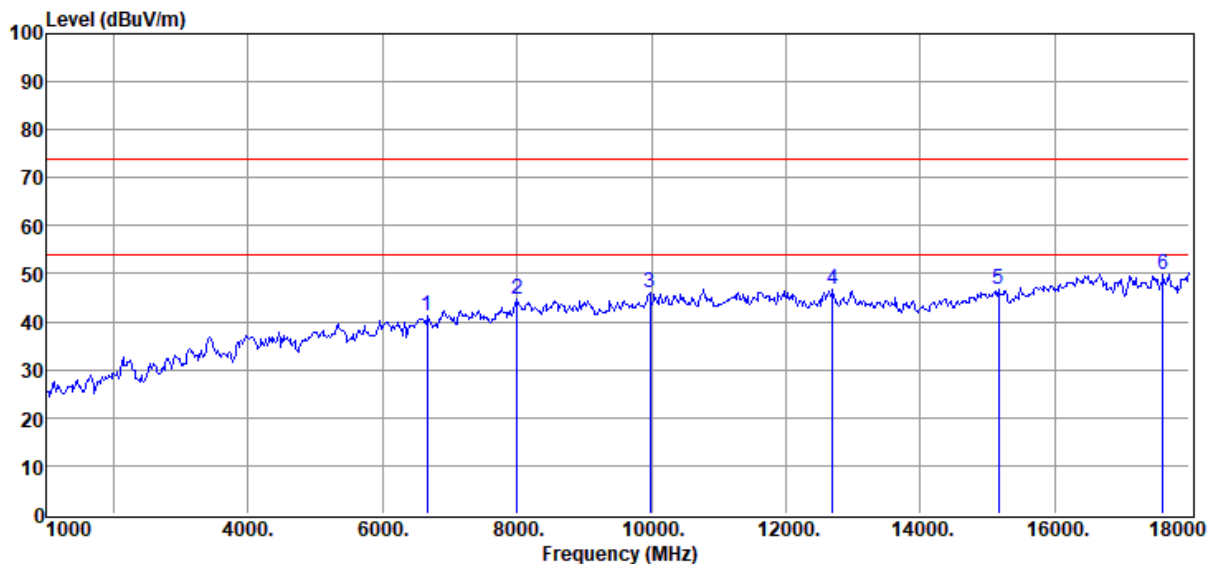

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	6661.00	54.51	35.24	54.96	6.32	41.11	74.00	32.89	Peak	HORIZONTAL
2	8004.00	54.16	38.12	54.70	7.12	44.70	74.00	29.30	Peak	HORIZONTAL
3	9976.00	51.60	39.31	53.11	8.30	46.10	74.00	27.90	Peak	HORIZONTAL
4	12696.00	51.19	39.69	52.90	8.63	46.61	74.00	27.39	Peak	HORIZONTAL
5	15161.00	48.27	40.64	52.45	10.36	46.82	74.00	27.18	Peak	HORIZONTAL
6	17609.00	44.76	42.04	52.25	15.40	49.95	74.00	24.05	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 167

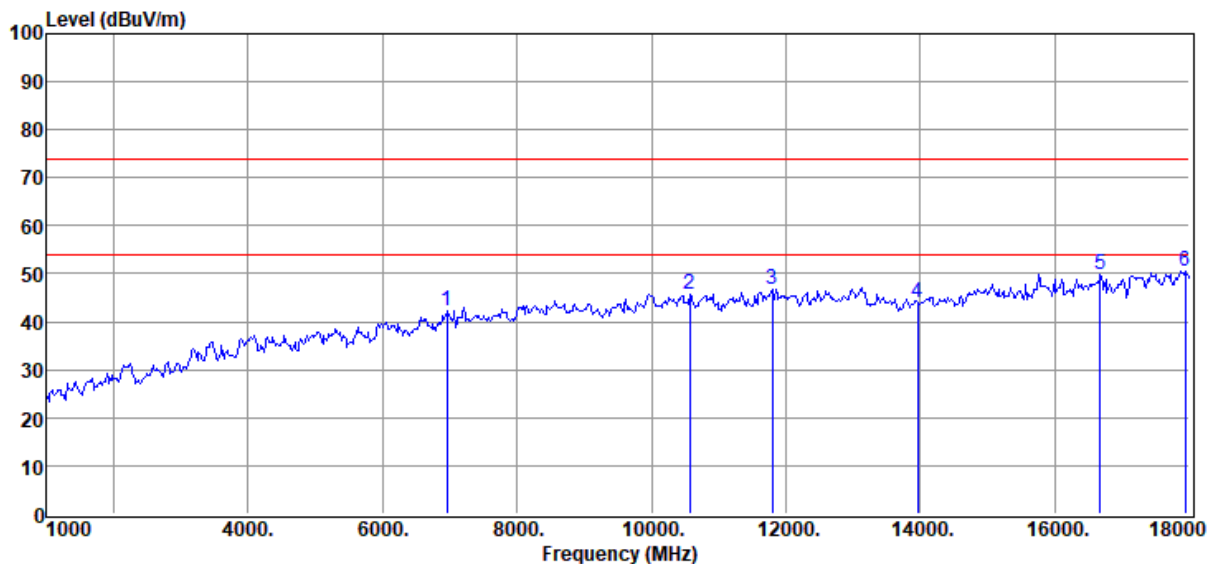

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	6950.00	54.54	36.20	54.91	6.44	42.27	74.00	31.73	Peak	HORIZONTAL
2	10571.00	50.66	39.67	52.69	8.10	45.74	74.00	28.26	Peak	HORIZONTAL
3	11795.00	50.94	39.40	51.84	8.32	46.82	74.00	27.18	Peak	HORIZONTAL
4	13954.00	49.52	40.35	54.74	8.99	44.12	74.00	29.88	Peak	HORIZONTAL
5	16674.00	47.40	40.20	52.08	14.48	50.00	74.00	24.00	Peak	HORIZONTAL
6	17932.00	42.02	45.38	52.13	15.34	50.61	74.00	23.39	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + 5V/1A load +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 168

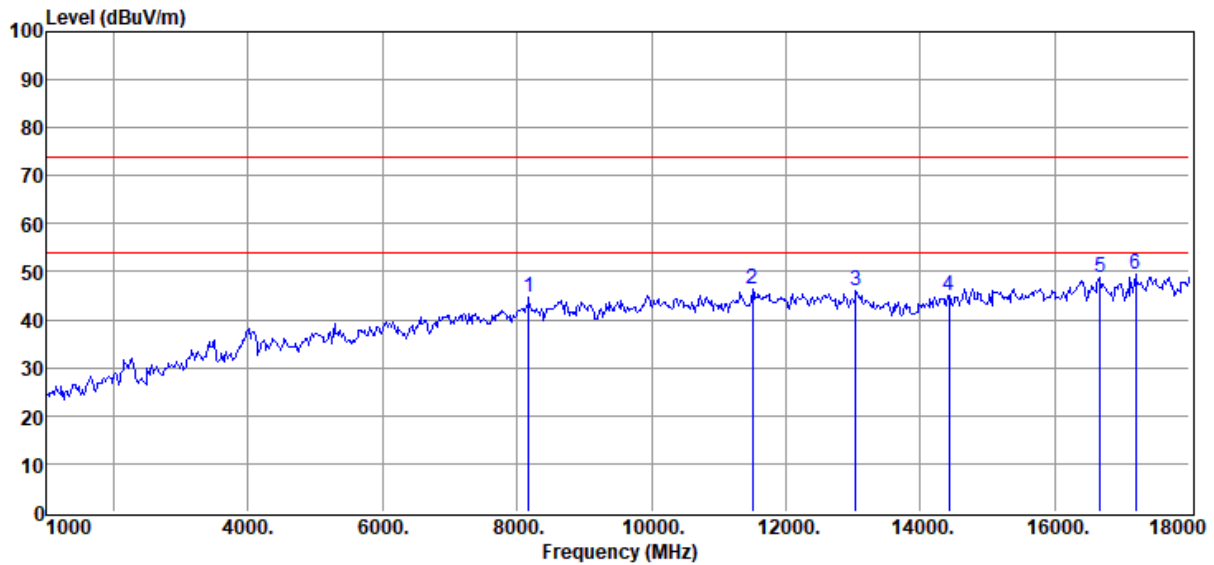

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	8174.00	54.19	37.85	54.52	7.29	44.81	74.00	29.19	Peak	VERTICAL
2	11506.00	50.96	39.21	52.04	8.19	46.32	74.00	27.68	Peak	VERTICAL
3	13036.00	50.69	40.24	53.45	8.73	46.21	74.00	27.79	Peak	VERTICAL
4	14430.00	48.88	40.67	53.88	9.43	45.10	74.00	28.90	Peak	VERTICAL
5	16674.00	46.06	40.20	52.08	14.48	48.66	74.00	25.34	Peak	VERTICAL
6	17201.00	44.76	41.60	52.42	15.47	49.41	74.00	24.59	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 169

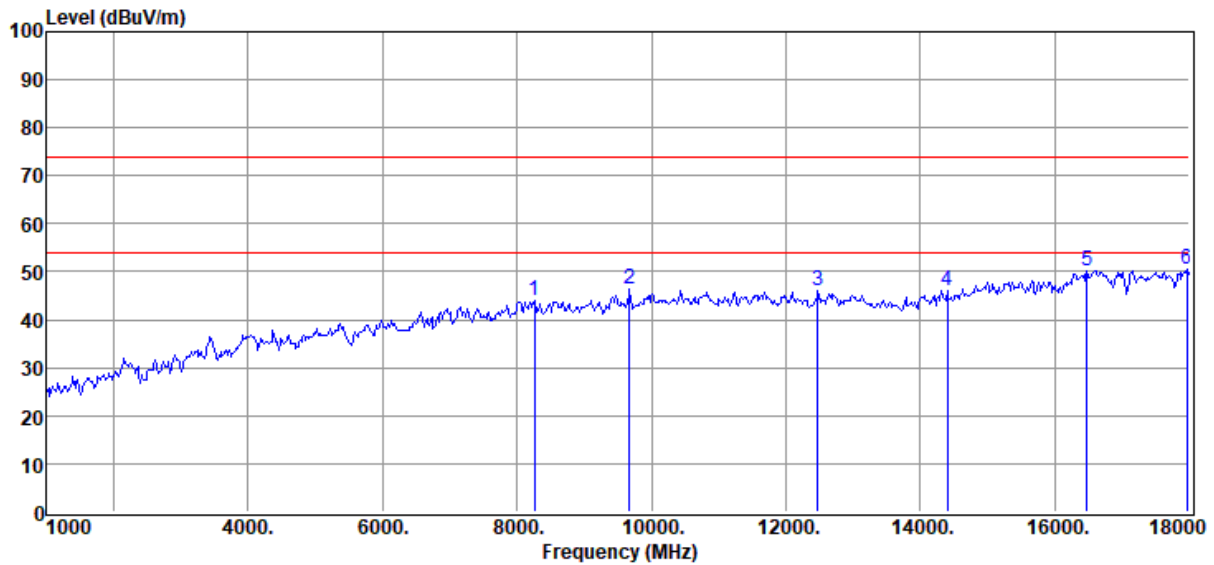

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	8259.00	52.83	38.20	54.43	7.37	43.97	74.00	30.03	Peak	VERTICAL
2	9670.00	52.94	38.40	53.29	8.23	46.28	74.00	27.72	Peak	VERTICAL
3	12475.00	50.25	39.70	52.52	8.56	45.99	74.00	28.01	Peak	VERTICAL
4	14396.00	49.87	40.70	53.95	9.39	46.01	74.00	27.99	Peak	VERTICAL
5	16470.00	48.51	39.71	51.82	13.84	50.24	74.00	23.76	Peak	VERTICAL
6	17966.00	41.55	45.79	52.11	15.34	50.57	74.00	23.43	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 170

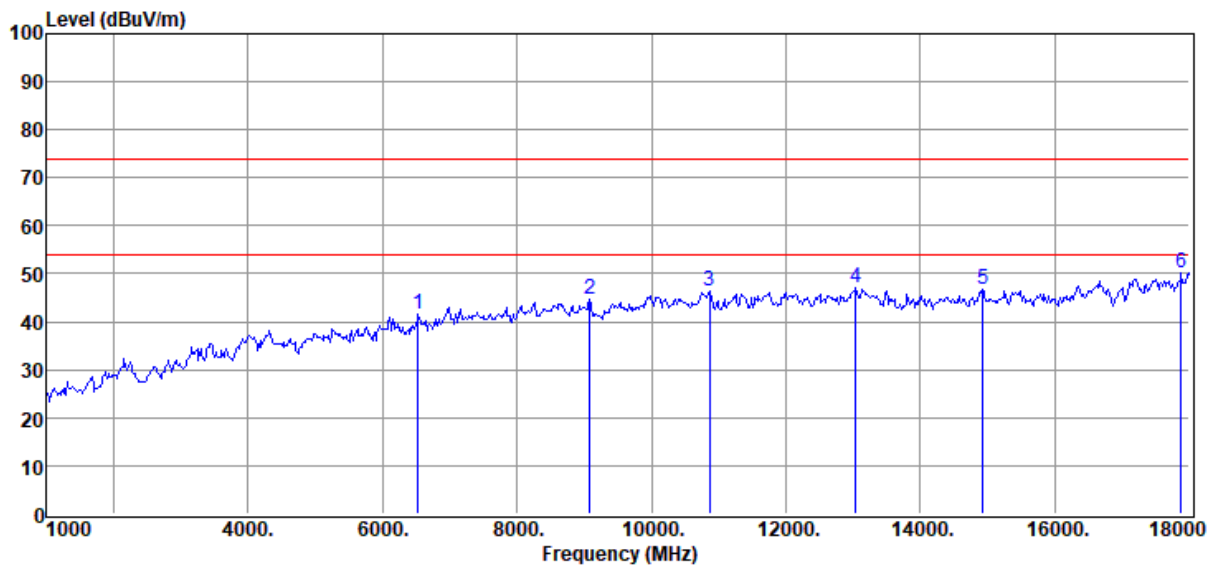

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	6525.00	55.47	34.95	54.99	6.27	41.70	74.00	32.30	Peak	HORIZONTAL
2	9075.00	52.28	37.80	53.65	8.07	44.50	74.00	29.50	Peak	HORIZONTAL
3	10860.00	51.20	39.56	52.49	8.00	46.27	74.00	27.73	Peak	HORIZONTAL
4	13036.00	51.49	40.24	53.45	8.73	47.01	74.00	26.99	Peak	HORIZONTAL
5	14923.00	48.70	40.98	52.86	9.90	46.72	74.00	27.28	Peak	HORIZONTAL
6	17881.00	42.35	44.56	52.15	15.35	50.11	74.00	23.89	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6**

Test Date : 2025-09-04 **Tested By** : Aaron Liu


EUT : Bluetooth Speaker **Model Number** : BANDBOX TRIO

Power Supply : AC 240V/50Hz **Test Mode** : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5% **Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The second: FG4CELL21700GP

Data: 171

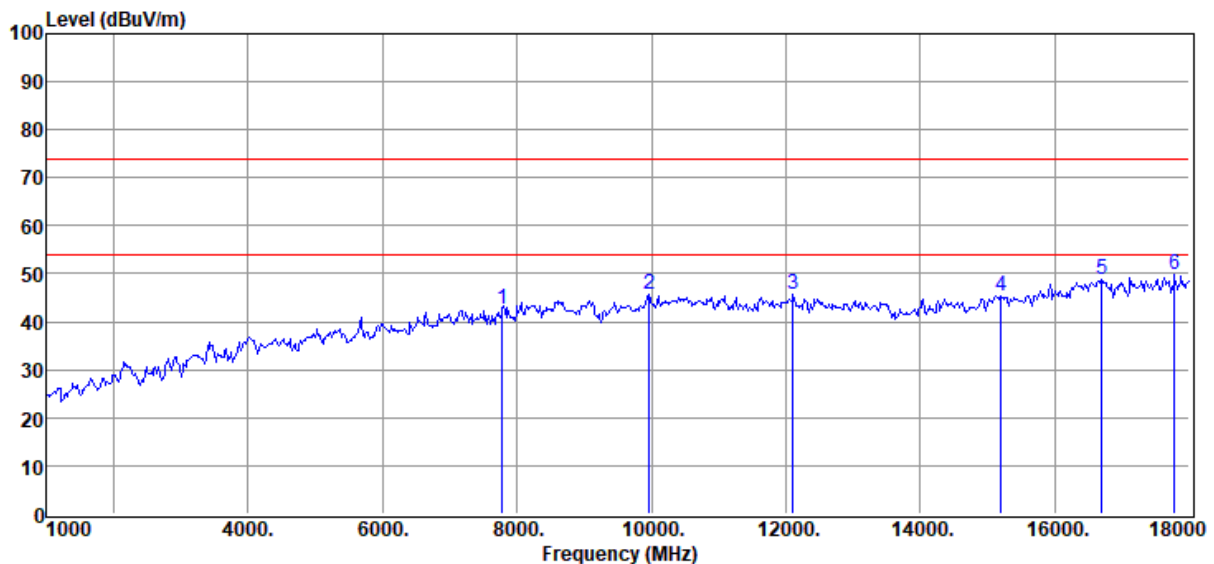

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	7783.00	52.95	37.47	54.74	6.98	42.66	74.00	31.34	Peak	HORIZONTAL
2	9959.00	51.53	39.11	53.12	8.30	45.82	74.00	28.18	Peak	HORIZONTAL
3	12101.00	49.81	39.40	51.88	8.44	45.77	74.00	28.23	Peak	HORIZONTAL
4	15195.00	46.67	40.60	52.40	10.44	45.31	74.00	28.69	Peak	HORIZONTAL
5	16691.00	45.98	40.26	52.11	14.54	48.67	74.00	25.33	Peak	HORIZONTAL
6	17779.00	43.97	42.64	52.19	15.37	49.79	74.00	24.21	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Aux in + Earphone + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 172

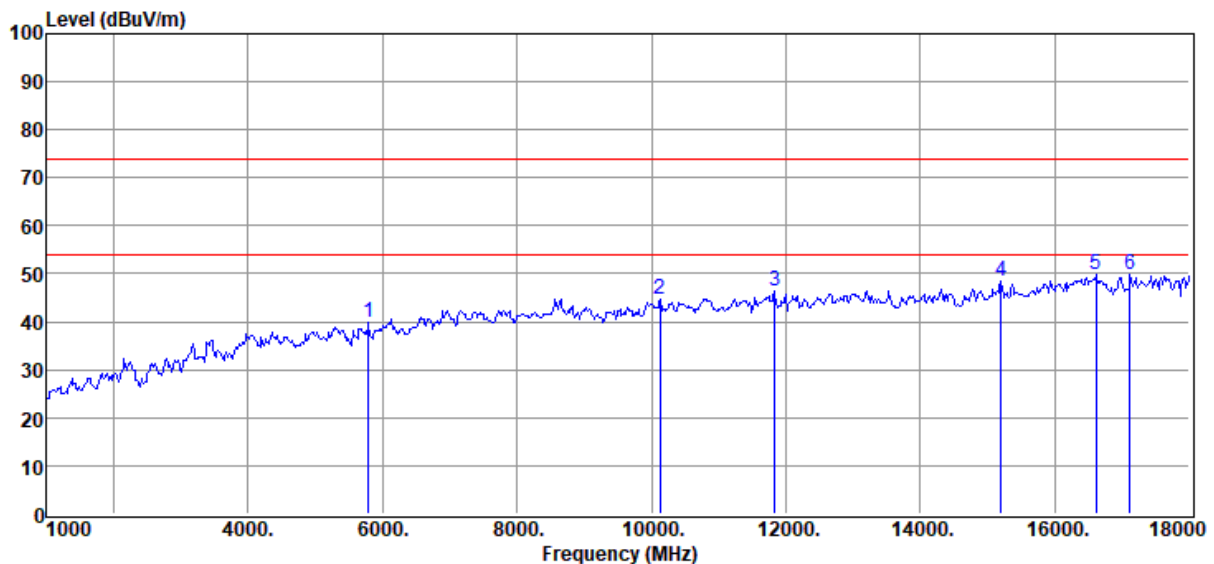

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	5794.00	55.72	33.05	54.99	6.03	39.81	74.00	34.19	Peak	VERTICAL
2	10129.00	49.89	39.64	53.01	8.26	44.78	74.00	29.22	Peak	VERTICAL
3	11829.00	50.38	39.40	51.82	8.33	46.29	74.00	27.71	Peak	VERTICAL
4	15195.00	49.87	40.60	52.40	10.44	48.51	74.00	25.49	Peak	VERTICAL
5	16606.00	47.49	39.92	52.00	14.27	49.68	74.00	24.32	Peak	VERTICAL
6	17116.00	45.17	41.68	52.45	15.48	49.88	74.00	24.12	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 173

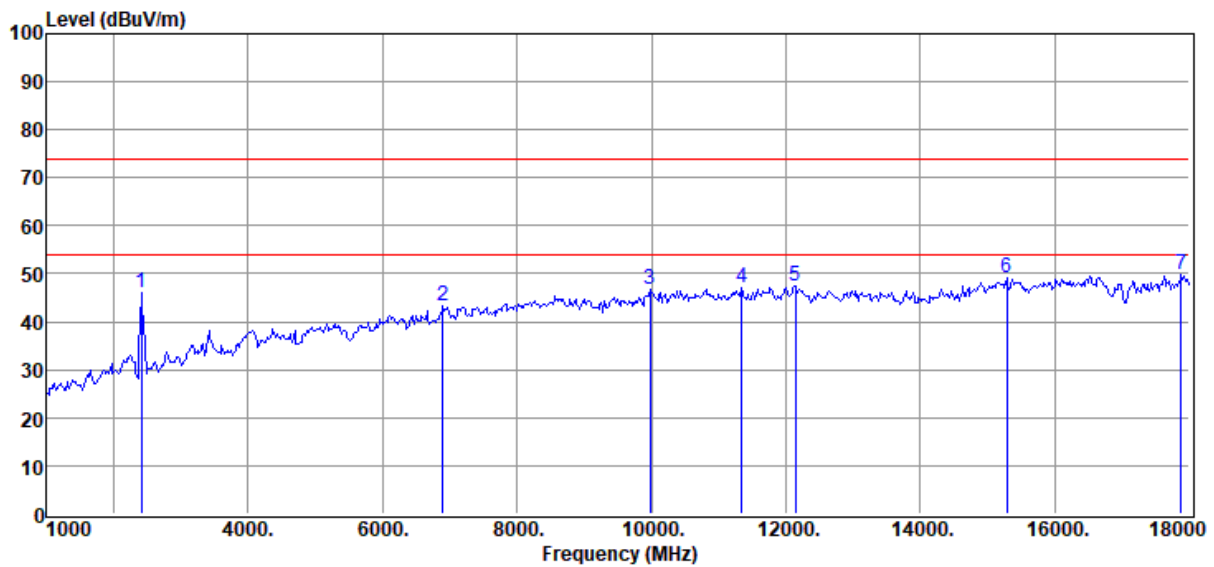

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	68.32	27.20	53.89	4.33	45.96	Carrier frequency			VERTICAL
2	6899.00	56.34	35.42	54.92	6.42	43.26	74.00	30.74	Peak	VERTICAL
3	9976.00	52.30	39.31	53.11	8.30	46.80	74.00	27.20	Peak	VERTICAL
4	11336.00	51.68	39.46	52.16	8.11	47.09	74.00	26.91	Peak	VERTICAL
5	12135.00	51.56	39.44	51.94	8.45	47.51	74.00	26.49	Peak	VERTICAL
6	15280.00	50.52	40.36	52.27	10.64	49.25	74.00	24.75	Peak	VERTICAL
7	17881.00	42.06	44.56	52.15	15.35	49.82	74.00	24.18	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The second: FG4CELL21700GP

Data: 174

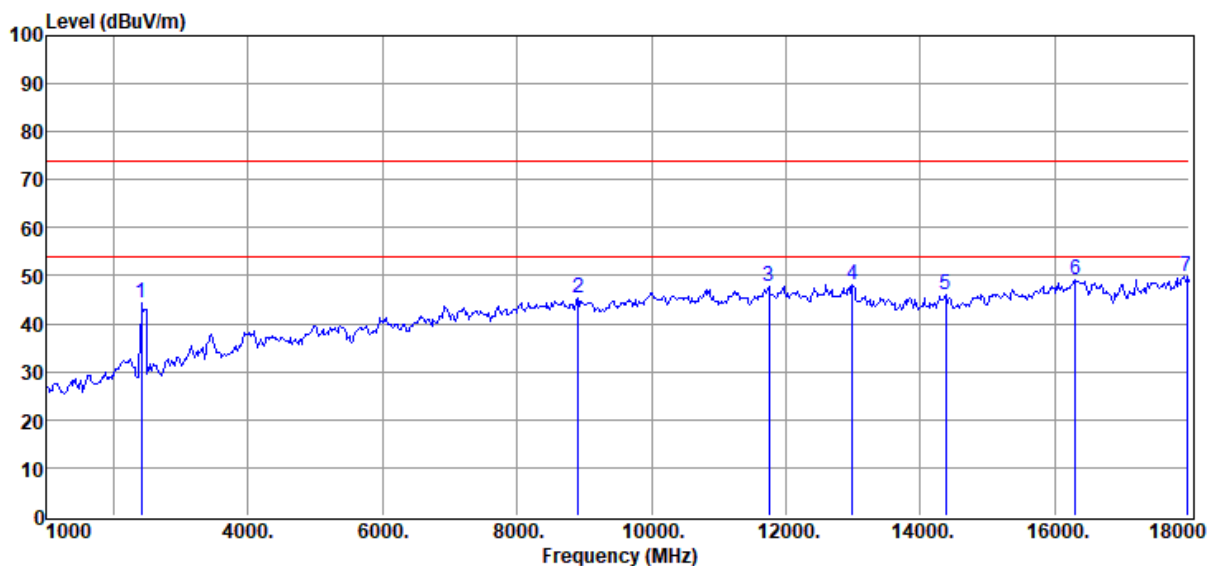

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	66.84	27.20	53.89	4.33	44.48	Carrier frequency			HORIZONTAL
2	8905.00	52.63	38.58	53.79	7.97	45.39	74.00	28.61	Peak	HORIZONTAL
3	11744.00	52.13	39.34	51.87	8.30	47.90	74.00	26.10	Peak	HORIZONTAL
4	12985.00	52.50	40.19	53.38	8.72	48.03	74.00	25.97	Peak	HORIZONTAL
5	14379.00	50.05	40.70	53.99	9.38	46.14	74.00	27.86	Peak	HORIZONTAL
6	16300.00	48.29	39.10	51.60	13.29	49.08	74.00	24.92	Peak	HORIZONTAL
7	17966.00	40.87	45.79	52.11	15.34	49.89	74.00	24.11	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
HORIZONTAL

Memo : The second: FG4CELL21700GP

Data: 175

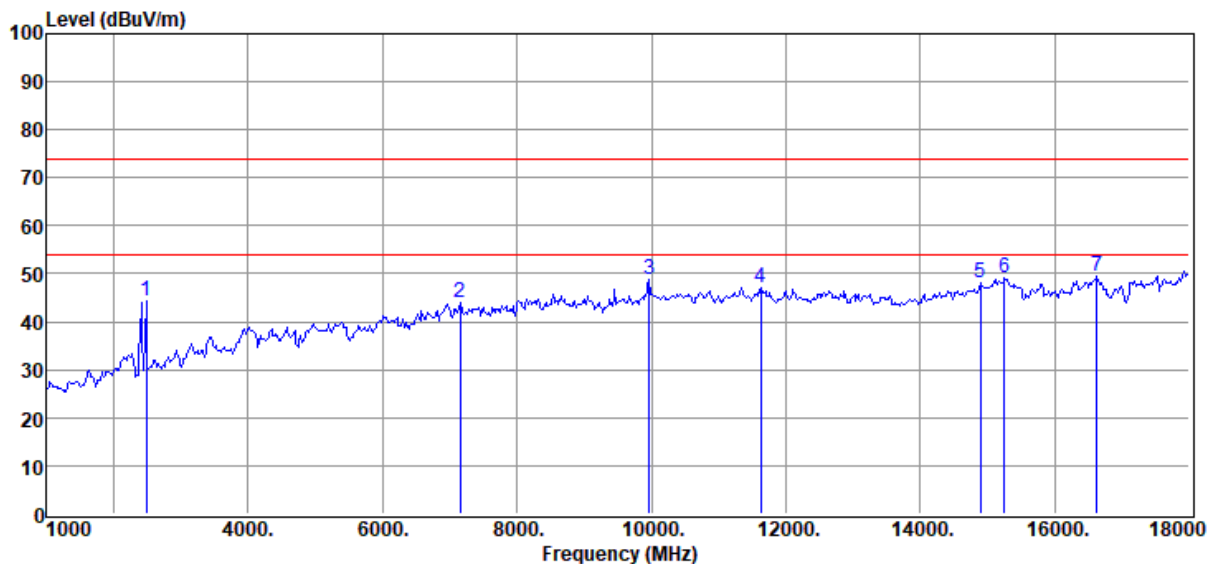

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2479.00	66.44	27.37	53.91	4.42	44.32	Carrier frequency			HORIZONTAL
2	7154.00	55.11	37.27	54.87	6.57	44.08	74.00	29.92	Peak	HORIZONTAL
3	9959.00	54.49	39.11	53.12	8.30	48.78	74.00	25.22	Peak	HORIZONTAL
4	11625.00	51.49	39.30	51.96	8.24	47.07	74.00	26.93	Peak	HORIZONTAL
5	14889.00	50.25	40.99	52.93	9.87	48.18	74.00	25.82	Peak	HORIZONTAL
6	15246.00	50.30	40.46	52.32	10.56	49.00	74.00	25.00	Peak	HORIZONTAL
7	16623.00	47.18	39.99	52.02	14.32	49.47	74.00	24.53	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + TWS + 5V/1A
load + MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 176

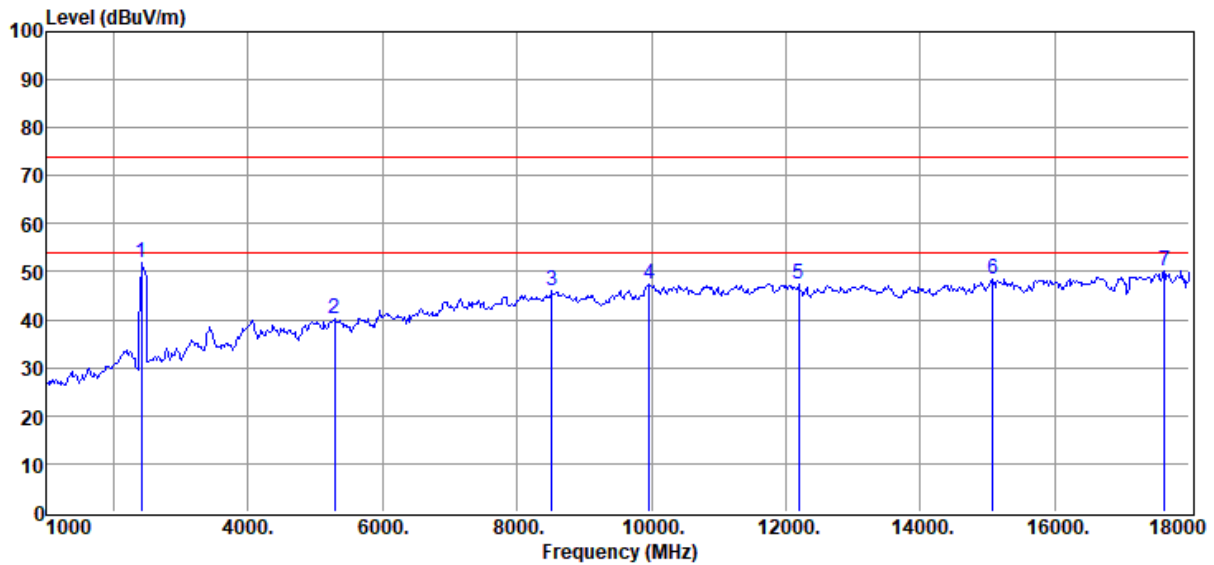

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2411.00	74.15	27.20	53.89	4.33	51.79	Carrier frequency			VERTICAL
2	5284.00	55.95	32.78	54.68	6.01	40.06	74.00	33.94	Peak	VERTICAL
3	8514.00	54.35	38.37	54.17	7.61	46.16	74.00	27.84	Peak	VERTICAL
4	9959.00	53.09	39.11	53.12	8.30	47.38	74.00	26.62	Peak	VERTICAL
5	12186.00	51.36	39.49	52.03	8.47	47.29	74.00	26.71	Peak	VERTICAL
6	15076.00	50.25	40.75	52.58	10.15	48.57	74.00	25.43	Peak	VERTICAL
7	17626.00	44.98	42.10	52.25	15.39	50.22	74.00	23.78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 177

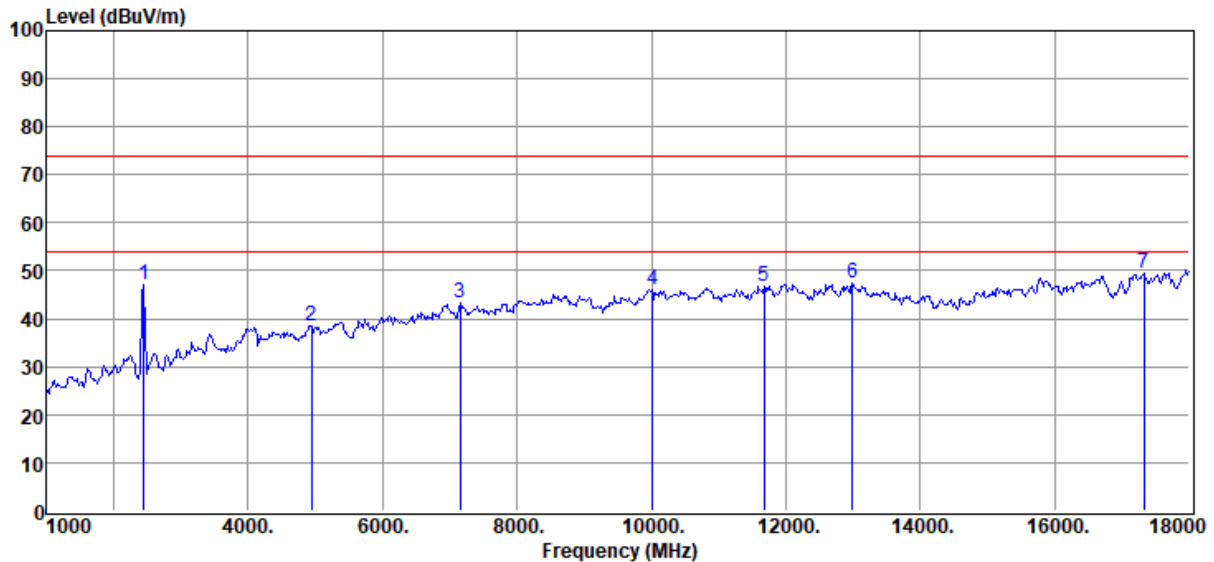

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Margi n (dB)	Detector	Polarization
1	2445.00	69.49	27.20	53.90	4.37	47.16	Carrier frequency			VERTICAL
2	4944.00	55.05	31.88	54.48	5.94	38.39	74.00	35.61	Peak	VERTICAL
3	7154.00	54.19	37.27	54.87	6.57	43.16	74.00	30.84	Peak	VERTICAL
4	10010.00	51.10	39.61	53.09	8.31	45.93	74.00	28.07	Peak	VERTICAL
5	11676.00	51.07	39.30	51.92	8.27	46.72	74.00	27.28	Peak	VERTICAL
6	12985.00	51.84	40.19	53.38	8.72	47.37	74.00	26.63	Peak	VERTICAL
7	17320.00	44.74	41.76	52.37	15.44	49.57	74.00	24.43	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-09-04

EUT

: Bluetooth Speaker

Power Supply

: AC 120V/60Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The second: FG4CELL21700GP

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Charging + Bluetooth + Earphone + TWS + 5V/1A load + MIC*2 + Guitar mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/ HORIZONTAL

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Data: 178

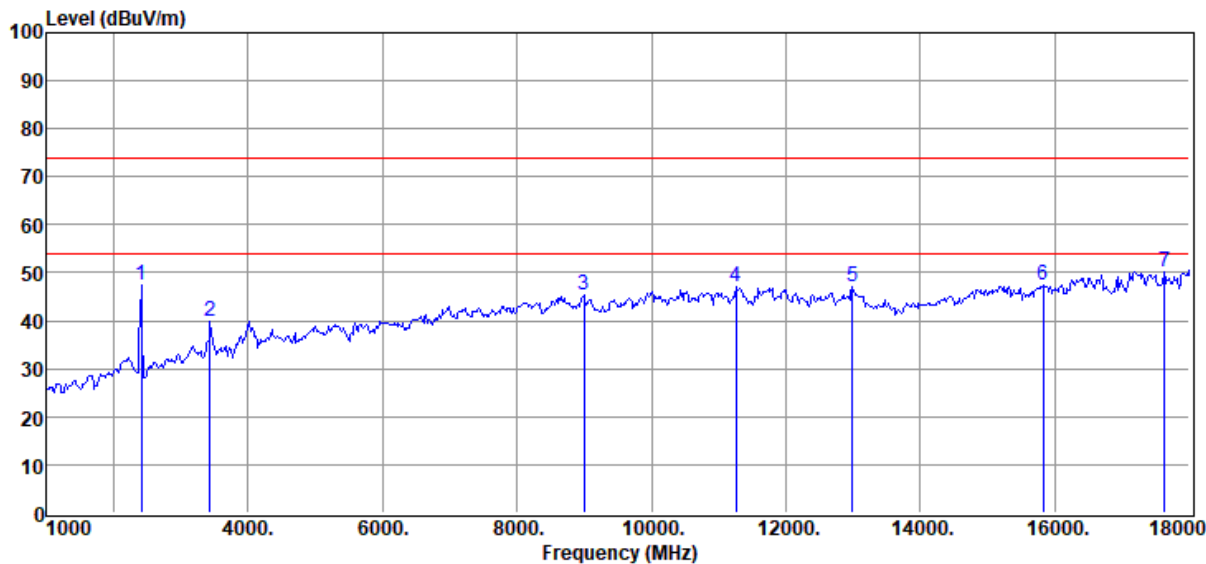

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2411.00	69.80	27.20	53.89	4.33	47.44	Carrier frequency			HORIZONTAL
2	3431.00	59.79	29.23	54.05	4.99	39.96	74.00	34.04	Peak	HORIZONTAL
3	8990.00	52.70	38.40	53.71	8.04	45.43	74.00	28.57	Peak	HORIZONTAL
4	11251.00	51.59	39.50	52.22	8.07	46.94	74.00	27.06	Peak	HORIZONTAL
5	12985.00	51.58	40.19	53.38	8.72	47.11	74.00	26.89	Peak	HORIZONTAL
6	15824.00	47.56	39.33	51.46	11.92	47.35	74.00	26.65	Peak	HORIZONTAL
7	17626.00	45.01	42.10	52.25	15.39	50.25	74.00	23.75	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-09-04

EUT

: Bluetooth Speaker

Power Supply

: AC 240V/50Hz

Condition

: Temp:23.1°C,Humi:62.5%

Memo

: The second: FG4CELL21700GP

Tested By

: Aaron Liu

Model Number

: BANDBOX TRIO

Test Mode


: Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode

Antenna/Distance

: 2023 BBHA9120D1#/3m/
HORIZONTAL

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Data: 179

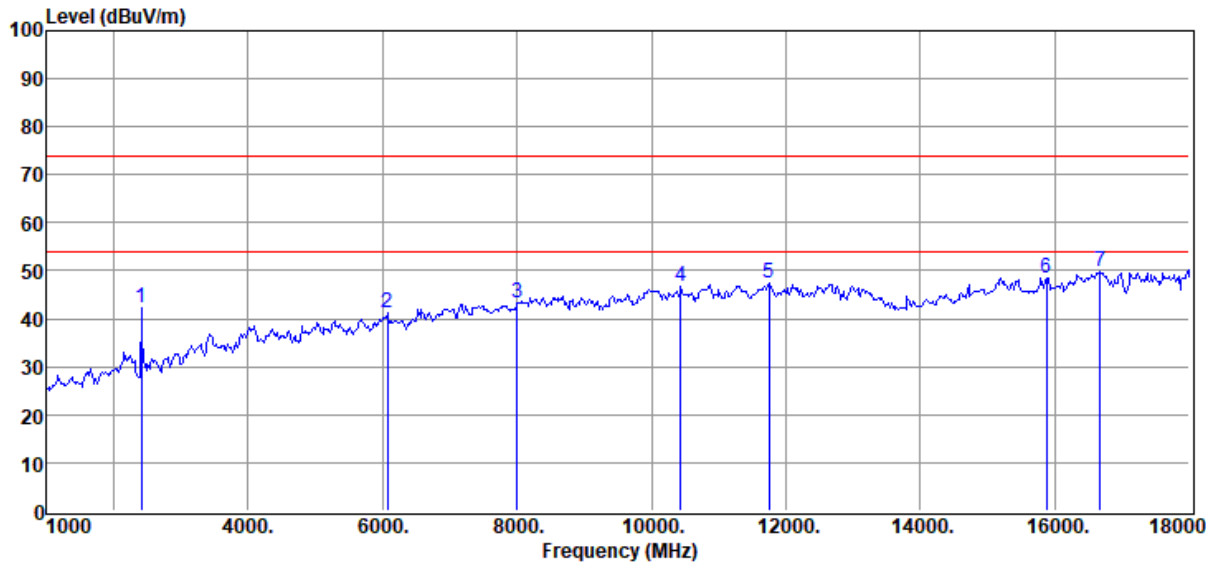

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	64.69	27.20	53.89	4.33	42.33	Carrier frequency			HORIZONTAL
2	6066.00	56.80	33.60	55.09	6.07	41.38	74.00	32.62	Peak	HORIZONTAL
3	8004.00	52.75	38.12	54.70	7.12	43.29	74.00	30.71	Peak	HORIZONTAL
4	10435.00	51.76	39.60	52.79	8.15	46.72	74.00	27.28	Peak	HORIZONTAL
5	11744.00	51.72	39.34	51.87	8.30	47.49	74.00	26.51	Peak	HORIZONTAL
6	15875.00	48.79	39.17	51.38	12.03	48.61	74.00	25.39	Peak	HORIZONTAL
7	16674.00	47.17	40.20	52.08	14.48	49.77	74.00	24.23	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Charging + Bluetooth + Earphone +
TWS + 5V/1A load + MIC*2 + Guitar
mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
VERTICAL**Memo** : The second: FG4CELL21700GP

Data: 180

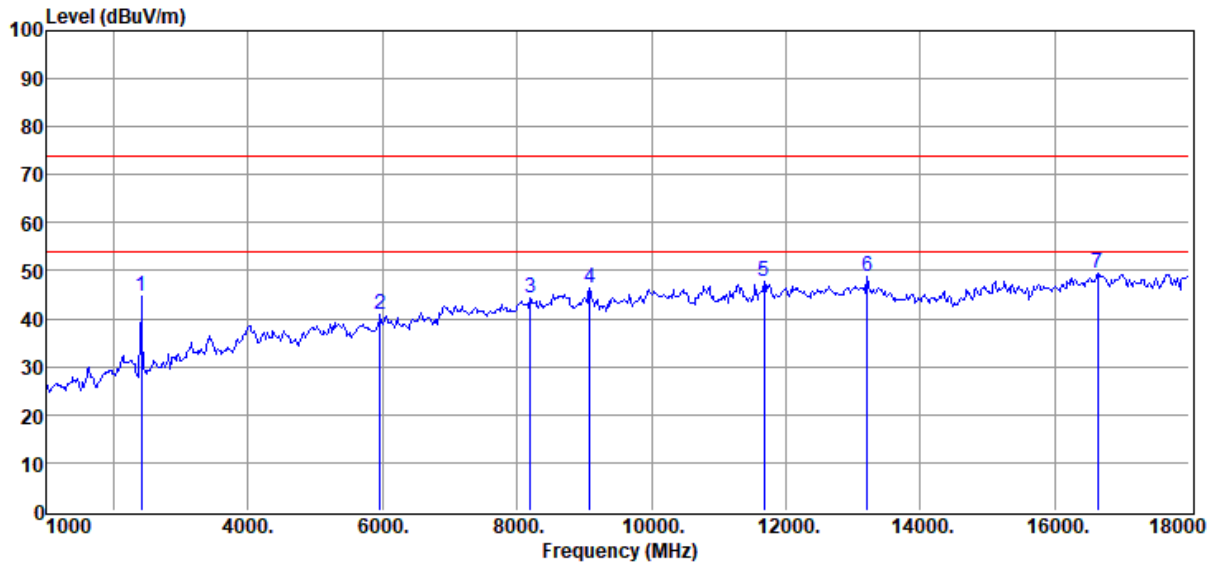

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	67.19	27.20	53.89	4.33	44.83	Carrier frequency			VERTICAL
2	5964.00	56.19	33.67	55.08	6.04	40.82	74.00	33.18	Peak	VERTICAL
3	8191.00	53.72	37.82	54.50	7.31	44.35	74.00	29.65	Peak	VERTICAL
4	9075.00	54.25	37.80	53.65	8.07	46.47	74.00	27.53	Peak	VERTICAL
5	11676.00	51.99	39.30	51.92	8.27	47.64	74.00	26.36	Peak	VERTICAL
6	13206.00	53.29	40.28	53.70	8.78	48.65	74.00	25.35	Peak	VERTICAL
7	16640.00	47.07	40.06	52.04	14.38	49.47	74.00	24.53	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 240V/50Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 181

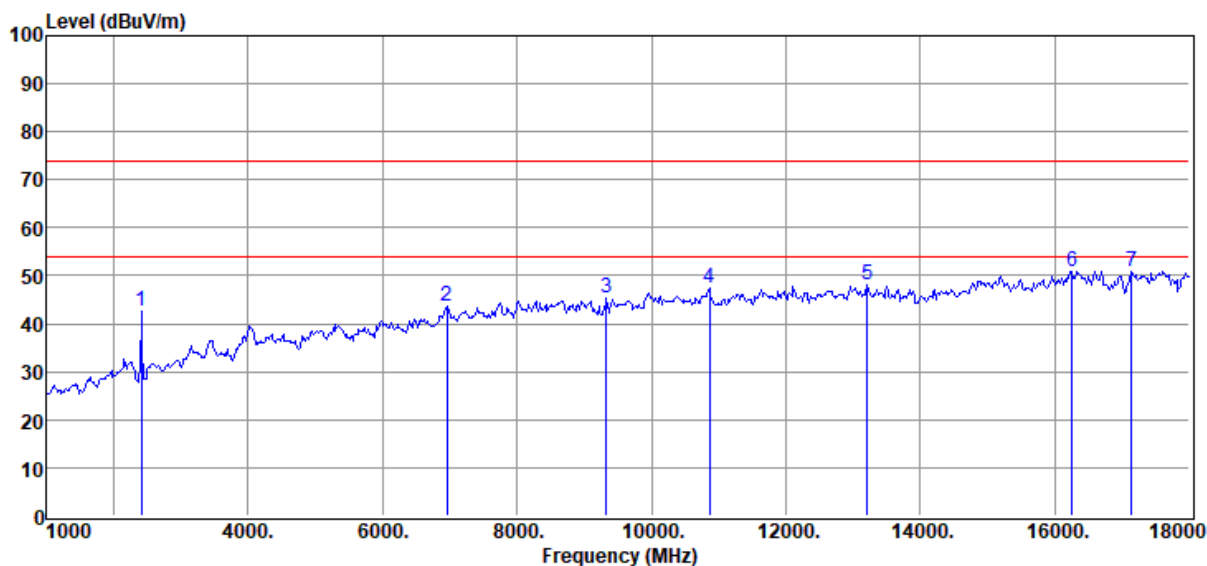

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	64.95	27.20	53.89	4.33	42.59	Carrier frequency			VERTICAL
2	6950.00	55.83	36.20	54.91	6.44	43.56	74.00	30.44	Peak	VERTICAL
3	9330.00	53.20	37.56	53.49	8.14	45.41	74.00	28.59	Peak	VERTICAL
4	10860.00	52.50	39.56	52.49	8.00	47.57	74.00	26.43	Peak	VERTICAL
5	13206.00	52.74	40.28	53.70	8.78	48.10	74.00	25.90	Peak	VERTICAL
6	16249.00	50.44	38.95	51.53	13.13	50.99	74.00	23.01	Peak	VERTICAL
7	17133.00	46.02	41.67	52.45	15.48	50.72	74.00	23.28	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 240V/50Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 182

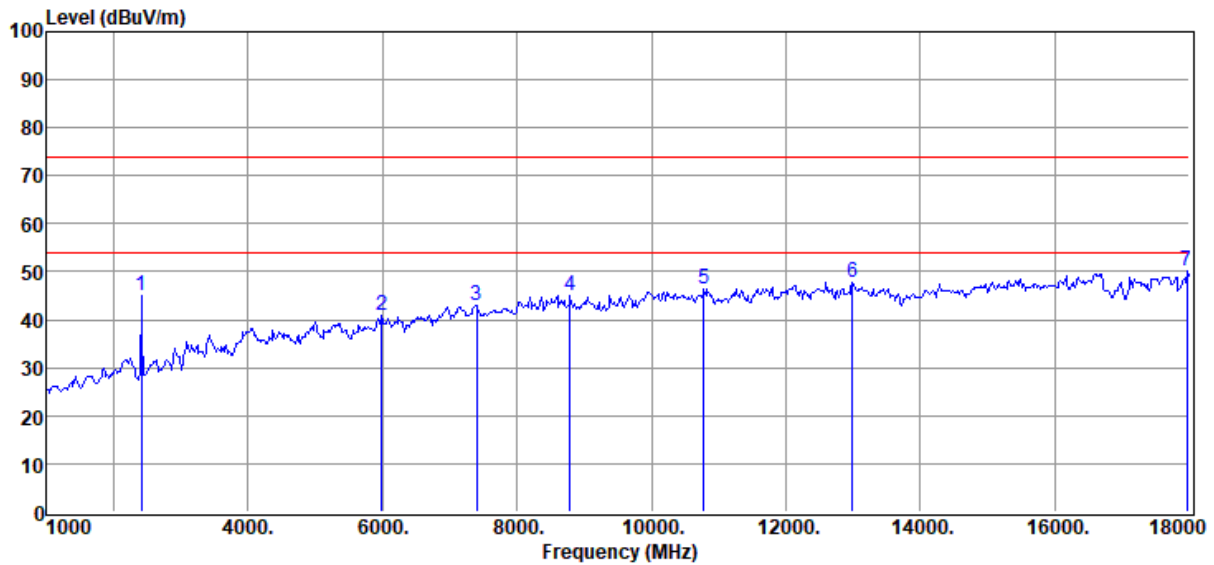

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	67.30	27.20	53.89	4.33	44.94	Carrier frequency			HORIZONTAL
2	5981.00	56.46	33.64	55.09	6.04	41.05	74.00	32.95	Peak	HORIZONTAL
3	7392.00	53.89	37.09	54.82	6.73	42.89	74.00	31.11	Peak	HORIZONTAL
4	8786.00	52.51	38.50	53.90	7.86	44.97	74.00	29.03	Peak	HORIZONTAL
5	10775.00	51.41	39.50	52.55	8.03	46.39	74.00	27.61	Peak	HORIZONTAL
6	12985.00	52.38	40.19	53.38	8.72	47.91	74.00	26.09	Peak	HORIZONTAL
7	17966.00	41.05	45.79	52.11	15.34	50.07	74.00	23.93	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04**Tested By** : Aaron Liu**EUT** : Bluetooth Speaker**Model Number** : BANDBOX TRIO**Power Supply** : AC 120V/60Hz**Test Mode** : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode**Condition** : Temp:23.1°C,Humi:62.5%**Antenna/Distance** : 2023 BBHA9120D1#/3m/
HORIZONTAL**Memo** : The second: FG4CELL21700GP

Data: 183

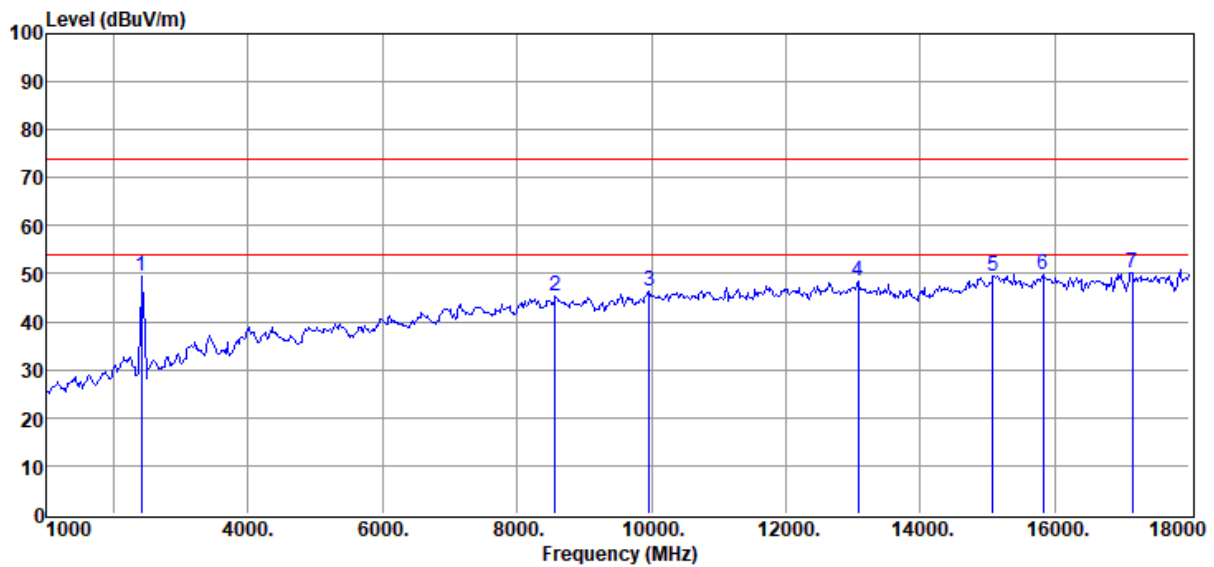

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	71.97	27.20	53.89	4.33	49.61	Carrier frequency			HORIZONTAL
2	8565.00	53.62	38.36	54.12	7.66	45.52	74.00	28.48	Peak	HORIZONTAL
3	9959.00	52.17	39.11	53.12	8.30	46.46	74.00	27.54	Peak	HORIZONTAL
4	13070.00	53.09	40.27	53.50	8.74	48.60	74.00	25.40	Peak	HORIZONTAL
5	15076.00	51.32	40.75	52.58	10.15	49.64	74.00	24.36	Peak	HORIZONTAL
6	15824.00	50.16	39.33	51.46	11.92	49.95	74.00	24.05	Peak	HORIZONTAL
7	17150.00	45.48	41.65	52.44	15.47	50.16	74.00	23.84	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2025 RE 1# Report data\Q25042508-2E\0904 RE-H.EM6

Test Date : 2025-09-04

Tested By : Aaron Liu

EUT : Bluetooth Speaker

Model Number : BANDBOX TRIO

Power Supply : AC 120V/60Hz


Test Mode : Adapter charging + Bluetooth + TWS +
MIC*2 + Guitar mode

Condition : Temp:23.1°C,Humi:62.5%

Antenna/Distance : 2023 BBHA9120D1#/3m/
VERTICAL

Memo : The second: FG4CELL21700GP

Data: 184

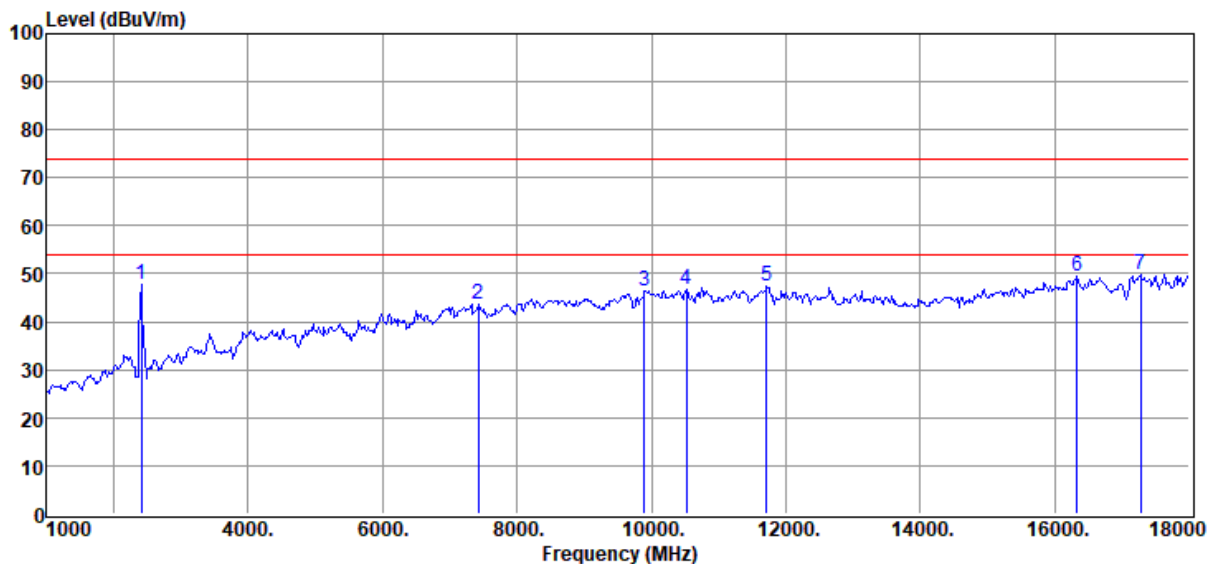

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margi n (dB)	Detector	Polarization
1	2411.00	69.99	27.20	53.89	4.33	47.63	Carrier frequency			VERTICAL
2	7426.00	54.87	36.99	54.81	6.75	43.80	74.00	30.20	Peak	VERTICAL
3	9891.00	52.29	39.08	53.16	8.28	46.49	74.00	27.51	Peak	VERTICAL
4	10520.00	51.73	39.62	52.73	8.12	46.74	74.00	27.26	Peak	VERTICAL
5	11710.00	51.81	39.31	51.90	8.28	47.50	74.00	26.50	Peak	VERTICAL
6	16334.00	48.50	39.24	51.64	13.40	49.50	74.00	24.50	Peak	VERTICAL
7	17269.00	45.05	41.74	52.39	15.45	49.85	74.00	24.15	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

4.8. Test photo





5. Sample photos

Please refer to DDT-Q25042508-2E Appendix I.

Note:

Regulatory Statement and Label Marking Advice for the FCC SDoC

1. Marking Suggested for the label:

Trade Name and model number

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2. Statement suggested for the User Manual:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

Notes: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: If shielded cables or special accessories are required for compliance, a statement must be included which instructs the user to employ them, for example, shielded cables must be used with this unit to ensure compliance with the Class B FCC limits.

Note:

Suggested text for the notice indicating compliance with this Standard:

CAN ICES(B)/NMB(B)

-----End Report-----