



CE-EMC TEST REPORT

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	BLUETOOTH HEADSET
Model No.	:	LIVE BEAM 4
Test Standard(s)	:	EN 55032:2015 EN 55032:2015/A11:2020 EN 55035:2017 EN 55035:2017/A11:2020 EN 61000-3-2:2014 EN IEC 61000-3-2:2019 EN IEC 61000-3-2:2019/A1:2021 EN IEC 61000-3-2:2019/A2:2024 EN 61000-3-3:2013 EN 61000-3-3:2013/A2:2021
Report No.	:	DDT-RE25103101-2E02
Issue Date	:	2025/12/29
Issued By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Primary function of EUT	8
2.3.	Port of EUT.....	8
2.4.	Accessories of EUT	8
2.5.	Block diagram EUT configuration for test.....	9
2.6.	Decision of final test mode	9
2.7.	Deviations of test standard	10
2.8.	Test environment conditions	10
2.9.	Test laboratory	10
2.10.	Measurement uncertainty	11
3.	Conducted disturbance at mains terminals	12
3.1.	Test equipment.....	12
3.2.	Block diagram of test setup	12
3.3.	Limits	13
3.4.	Assistant equipment used for test	13
3.5.	Test procedure	14
3.6.	Test result.....	14
3.7.	Test data	15
3.8.	Test photo	19
4.	Radiated Emissions.....	20
4.1.	Test equipment.....	20
4.2.	Block diagram of test setup	21
4.3.	Limits	24
4.4.	Assistant equipment used for test	24
4.5.	Test procedure	25
4.6.	Test result.....	25
4.7.	Test data	26
4.8.	Test photo	38
5.	Voltage Fluctuations& Flicker Test.....	39
5.1.	Test equipment.....	39
5.2.	Block diagram of test setup	39
5.3.	Test levels and performance criterion	40
5.4.	Assistant equipment used for test	40
5.5.	Test procedure	40

5.6.	Test result.....	40
5.7.	Test data	41
5.8.	Test photo	43
6.	Electrostatic Discharge Test.....	44
6.1.	Test equipment.....	44
6.2.	Block diagram of test setup	44
6.3.	Test levels and performance criterion	44
6.4.	Assistant equipment used for test	45
6.5.	Test procedure	45
6.6.	Test result.....	46
6.7.	ESD test points.....	47
6.8.	Test photo	47
7.	Continuous Radio Frequency Disturbances Test.....	48
7.1.	Test equipment.....	48
7.2.	Block diagram of test setup	48
7.3.	Test levels and performance criterion	49
7.4.	Assistant equipment used for test	50
7.5.	Test procedure	50
7.6.	Test result.....	51
7.7.	Test photo	52
8.	Electrical Fast Transients(EFT) Test.....	53
8.1.	Test equipment.....	53
8.2.	Block diagram of test setup	53
8.3.	Test levels and performance criterion	54
8.4.	Assistant equipment used for test	54
8.5.	Test procedure	54
8.6.	Test result.....	55
8.7.	Test photo	55
9.	Surge Test.....	56
9.1.	Test equipment.....	56
9.2.	Block diagram of test setup	56
9.3.	Test levels and performance criterion	56
9.4.	Assistant equipment used for test	57
9.5.	Test procedure	57
9.6.	Test result.....	58
9.7.	Test photo	58
10.	Continuous Conducted Disturbances Test.....	59
10.1.	Test equipment.....	59

10.2.	Block diagram of test setup	59
10.3.	Test levels and performance criterion	60
10.4.	Assistant equipment used for test	61
10.5.	Test procedure	61
10.6.	Test result.....	62
10.7.	Test photo	62
11.	Power-Frequency Magnetic Fields.....	63
11.1.	Test equipment.....	63
11.2.	Block diagram of test setup	63
11.3.	Test levels and performance criterion	63
11.4.	Assistant equipment used for test	63
11.5.	Test procedure	64
11.6.	Test result.....	64
11.7.	Test photo	65
12.	Voltage Dips and Interruptions Test	66
12.1.	Test equipment.....	66
12.2.	Block diagram of test setup	66
12.3.	Test levels and performance criterion	66
12.4.	Assistant equipment used for test	67
12.5.	Test procedure	67
12.6.	Test result.....	67
12.7.	Test photo	68
13.	Sample photos	69

Test Report Declare




Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	BLUETOOTH HEADSET
Model No.	:	LIVE BEAM 4

Test Standard Used:

EN 55032:2015
EN 55032:2015/A11:2020
EN 55035:2017
EN 55035:2017/A11:2020
EN 61000-3-2:2014
EN IEC 61000-3-2:2019
EN IEC 61000-3-2:2019/A1:2021
EN IEC 61000-3-2:2019/A2:2024
EN 61000-3-3:2013
EN 61000-3-3:2013/A2:2021

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25103101-2E02		
Date of Receipt:	2025/11/05	Date of Test:	2025/11/05-2025/11/09
Created: Lori Mi	Reviewed: Caesar Peng	Approved: Damon Hu	
			
2025/11/30	2025/12/29	2025/12/29	

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/12/29	Damon Hu

1. Summary of Test Results

EMISSION (EMI)			
Description of Test Item	Standard	Result	Memo
Conducted disturbance at mains terminals	EN 55032:2015, EN 55032:2015/A11:2020	PASS	/
Asymmetric mode conducted emissions	EN 55032:2015, EN 55032:2015/A11:2020	N/A	For asymmetric mode
Conducted Differential Voltage Emissions	EN 55032:2015, EN 55032:2015/A11:2020	N/A	antenna port, RF port
Radiated Emissions	EN 55032:2015, EN 55032:2015/A11:2020	PASS	/
Harmonic Current Emissions Test	EN 61000-3-2:2014, EN IEC 61000-3-2:2019, EN IEC 61000-3-2:2019/A1:2021, EN IEC 61000-3-2:2019/A2:2024	N/A	For AC power port ($\leq 16A$), According to IEC 61000-3-2 Clause 7, this product belongs to exceptions of Clause 7 or Annex C. limits are not specified in this standard.
Voltage Fluctuations& Flicker Test	EN 61000-3-3:2013, EN 61000-3-3:2013/A2:2021	PASS	/
IMMUNITY (EMS)			
Description of Test Item	Standard	Result	Memo
Electrostatic Discharge Test	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/
Continuous Radio Frequency Disturbances Test	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/
Electrical Fast Transients(EFT) Test	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/
Surge Test	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/
Continuous Conducted Disturbances Test	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/
Power-Frequency Magnetic Fields	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/
Voltage Dips and Interruptions Test	EN 55035:2017, EN 55035:2017/A11:2020	PASS	/

Note 1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: For the EMI measurements have made the EUT operated in a mode producing the highest emission level, and attempted to vary the configuration of the EUT radiated the highest emission. For the EMS measurements have made the EUT operated in the most sensitive mode.

2. General Test Information

2.1. Description of EUT

EUT* Name	: BLUETOOTH HEADSET
Model Number	: LIVE BEAM 4
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: CHARGING CASE: DC 5V from USB cable or Wireless charger EARBUDS: DC 5V from external charging case CHARGING CASE: DC 3.8V Lithium-ion built-in battery EARBUDS: DC 3.85V Lithium-ion built-in battery
EUT Class (Only For EMI)	: Class B
Maximum Work Frequency	: 2483.5MHz
Sample Number	: S25103101-007

Note 1: EUT is the abbreviation of equipment under test.

Note 2: “☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

Note 3: Equipment meeting Class A requirements may not offer adequate protection to broadcast services within a residential environment; The Class B requirements for equipment are intended to offer adequate protection to broadcast services within the residential environment. Equipment compliant with the class A requirements should have a warning notice in the user manual stating that it could cause radio interference. For example, Warning: Operation of this equipment in a residential environment could cause radio interference.

2.2. Primary function of EUT

Function	Description
☑ Audio output function	On-era devices

2.3. Port of EUT


Port	Description
☑ AC mains power port	Powered by AC/DC power converter

2.4. Accessories of EUT


Accessories	Manufacturer	Model number	Description
HEADSET CHARGING CASE	Harman	LIVE BEAM 4C	N/A

2.5. Block diagram EUT configuration for test

Mode 1: External charging mode



Mode 2: Internal charging mode

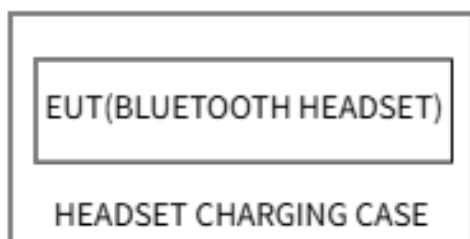

2.6. Decision of final test mode

Emission	Conducted disturbance at mains terminals	Mode 1: External charging mode
	Radiated Emissions	Mode 1: External charging mode Mode 2: Internal charging mode
	Voltage Fluctuations& Flicker Test	Mode 1: External charging mode
Immunity	Electrostatic Discharge Test	Mode 1: External charging mode Mode 2: Internal charging mode
	Continuous Radio Frequency Disturbances Test	Mode 1: External charging mode Mode 2: Internal charging mode
	Electrical Fast Transients(EFT) Test	Mode 1: External charging mode
	Surge Test	Mode 1: External charging mode
	Continuous Conducted Disturbances Test	Mode 1: External charging mode
	Power-Frequency Magnetic Fields	Mode 1: External charging mode Mode 2: Internal charging mode
	Voltage Dips and Interruptions Test	Mode 1: External charging mode

2.7. Deviations of test standard

No deviation.

2.8. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	20-25°C
Humidity range:	40-75%
Pressure range:	86-106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.9. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.10. Measurement uncertainty

Test Item	Uncertainty
Conducted disturbance at mains terminals	1#: 3.72dB (9 kHz to 150 kHz), 3.34dB (150 kHz to 30 MHz)
	2#: 3.75dB (9 kHz to 150 kHz), 3.39dB (150 kHz to 30 MHz)
	3#: 3.78dB (9 kHz to 150 kHz), 3.37dB (150 kHz to 30 MHz)
Uncertainty for telecommunication port conduction emission test	1#: AAN with aLCL = 55 ... 40 dBc: 3.64 dB AAN with aLCL = 65 ... 50 dBc: 4.08 dB AAN with aLCL = 75 ... 60 dBc: 4.56 dB
	2#: AAN with aLCL = 55 ... 40 dBc: 3.82 dB AAN with aLCL = 65 ... 50 dBc: 3.96 dB AAN with aLCL = 75 ... 60 dBc: 4.12 dB
Uncertainty for radiation emission test (30 MHz-1 GHz)	1#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	2#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	3#: 4.96 dB (Antenna Polarize: V) 4.98 dB (Antenna Polarize: H)
	10m: 4.48 dB (Antenna Polarize: V) 4.64 dB (Antenna Polarize: H)
Uncertainty for radiation disturbance test (1 GHz to 6 GHz)	1#: 4.10 dB (1-6 GHz)
	3#: 4.54 dB (1-6 GHz)
Uncertainty for Flicker test	0.2%
Uncertainty for Harmonic test	5%
Uncertainty for Electrostatic discharge	Rise time: 4% Peak current: 3.1% Current at 30 ns: 3.1% Current at 60 ns: 3.1%
Uncertainty for Surge	Peak of the open-circuit voltage impulse: 3% Front time of the open-circuit voltage impulse: 5% Width of the open-circuit voltage impulse: 5% Peak of the short-circuit current impulse: 2.7% Front time of the short-circuit current impulse: 5% Duration of the short-circuit current impulse: 3%
Uncertainty for Electrical fast transients	Voltage rise time: 3.7% Peak voltage value: 3.4% Voltage pulse width: 3.7%
Uncertainty for Continuous conducted disturbances	0.25dB
Uncertainty for Continuous radio frequency disturbances	1.12dB
Uncertainty for Power-frequency magnetic fields	10%
Uncertainty for Voltage dips and interruptions	3.7%
Temperature	0.4 °C
Humidity	2%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Conducted disturbance at mains terminals

3.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
EMI Test Receiver	R&S	ESCI [®]	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBEC K	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
Conducted Radiated Software	Audix	e3	DDT-ZC00562	/

3.2. Block diagram of test setup


For table-top equipment

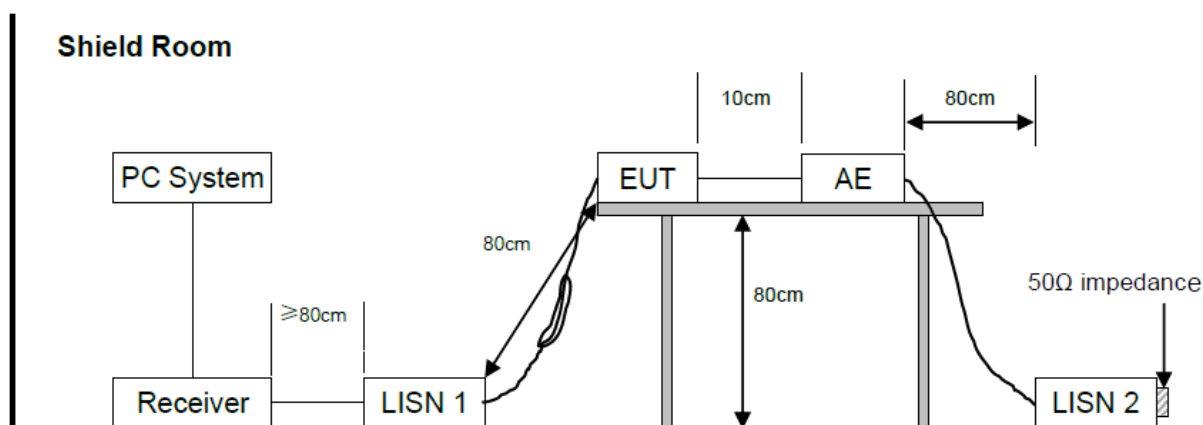

For floor standing equipment

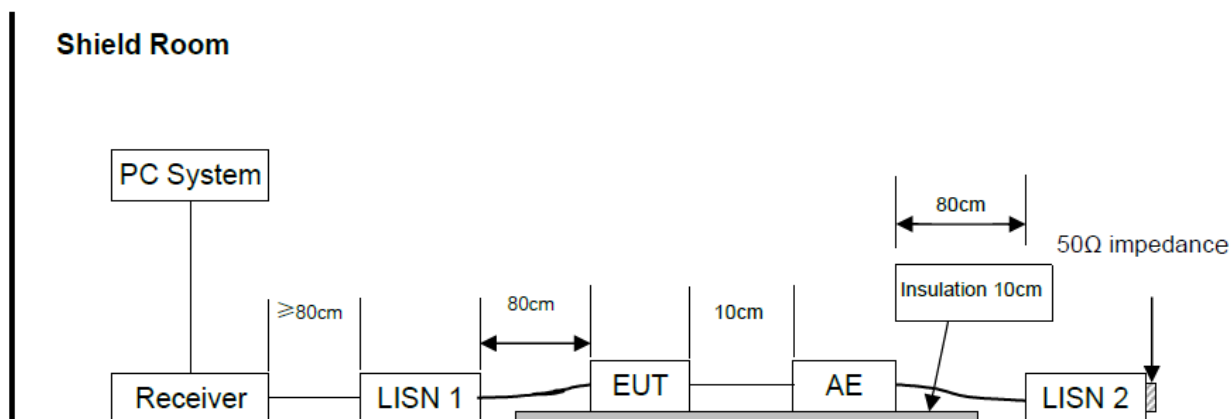

For combinations equipment

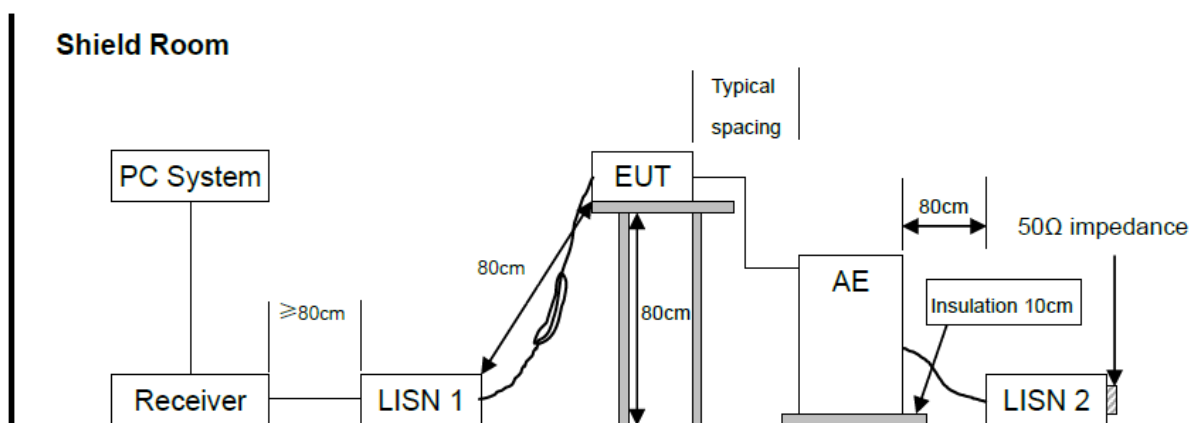

3.3. Limits

Class A:		
Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	79	66
500 kHz~30 MHz	73	60
Class B:		
Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-110600C02	N/A	N/A
USB cable	N/A	N/A	Length: 1m	N/A

3.5. Test procedure

- (1) The EUT placement requires reference to the test block diagram and is placed on a non-metallic table.
- (2) Setup the EUT and assistant equipment as shown above block diagram and equipment list.
- (3) The EUT's power adapter was connected to the power mains through a line impedance stabilization network (L.I.S.N). which this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted disturbance. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN 55032 on conducted disturbance emission test.
- (4) The bandwidth of test receiver is set at 9 kHz.
- (5) The frequency range from 150 kHz to 30 MHz is checked.

3.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.


Note 2: "----" means Peak detection; "----" means Average detection.

3.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25103101-2E\1108 CE.EM6
Test Date : 2025-11-08 Tested By : Yisheng Ling
Power Supply : AC 120V/60Hz Test Mode : External charging mode
Condition : Temp:22.3°C,Humi:51.5% LISN : 2025 1# 216/LINE
Memo : S25103101-007

Data: 34

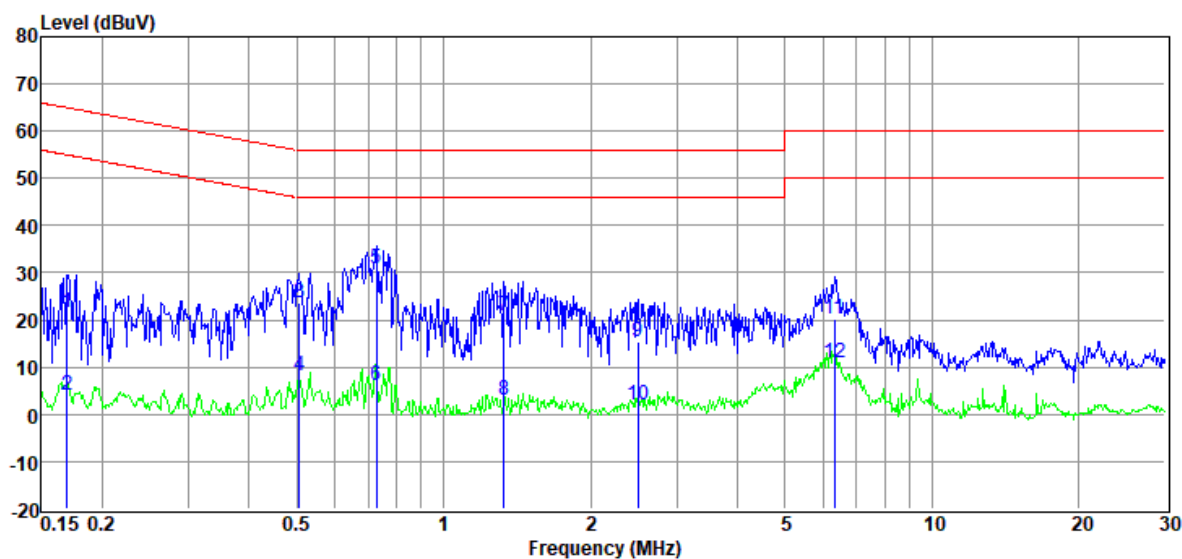

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	1.74	9.84	0.05	9.89	21.52	64.99	43.47	QP	LINE
2	0.17	-15.67	9.84	0.05	9.89	4.11	54.99	50.88	Average	LINE
3	0.51	4.03	9.78	0.09	9.89	23.79	56.00	32.21	QP	LINE
4	0.51	-11.56	9.78	0.09	9.89	8.20	46.00	37.80	Average	LINE
5	0.73	11.09	9.88	0.12	9.90	30.99	56.00	25.01	QP	LINE
6	0.73	-13.93	9.88	0.12	9.90	5.97	46.00	40.03	Average	LINE
7	1.33	1.04	9.90	0.16	9.90	21.00	56.00	35.00	QP	LINE
8	1.33	-17.08	9.90	0.16	9.90	2.88	46.00	43.12	Average	LINE
9	2.50	-4.68	9.86	0.17	9.88	15.23	56.00	40.77	QP	LINE
10	2.50	-17.81	9.86	0.17	9.88	2.10	46.00	43.90	Average	LINE
11	6.32	0.35	9.93	0.21	9.85	20.34	60.00	39.66	QP	LINE
12	6.32	-9.20	9.93	0.21	9.85	10.79	50.00	39.21	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25103101-2E\1108 CE.EM6
Test Date : 2025-11-08 Tested By : Yisheng Ling
Power Supply : AC 120V/60Hz Test Mode : External charging mode
Condition : Temp:22.3°C,Humi:51.5% LISN : 2025 1# 216/NEUTRAL
Memo : S25103101-007

Data: 36

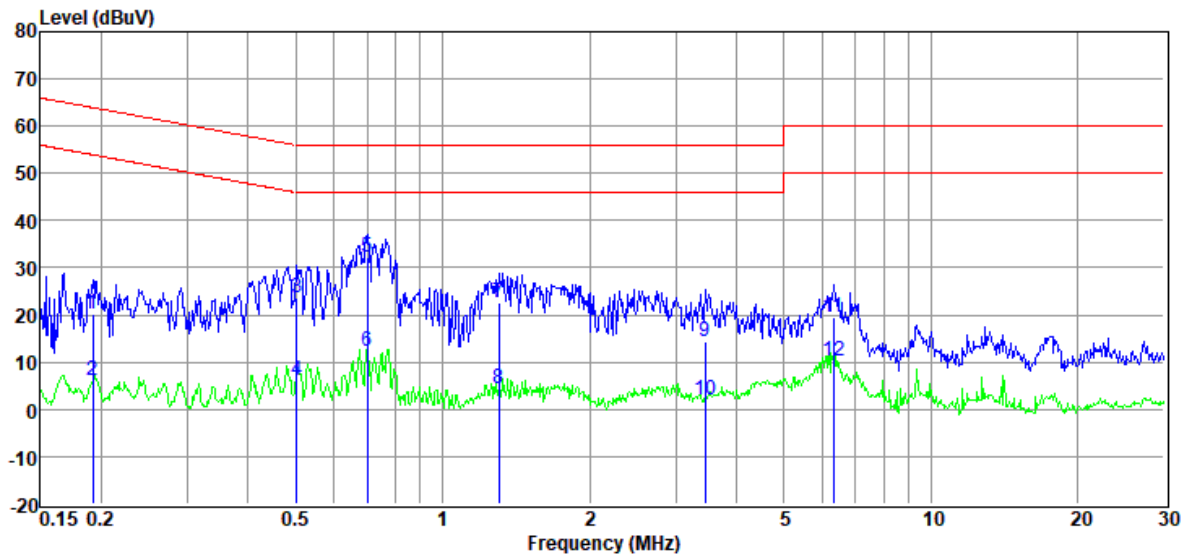

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	0.62	9.79	0.06	9.89	20.36	63.93	43.57	QP	NEUTRAL
2	0.19	-13.73	9.79	0.06	9.89	6.01	53.93	47.92	Average	NEUTRAL
3	0.50	3.89	9.91	0.09	9.89	23.78	56.00	32.22	QP	NEUTRAL
4	0.50	-13.90	9.91	0.09	9.89	5.99	46.00	40.01	Average	NEUTRAL
5	0.70	12.15	9.93	0.12	9.89	32.09	56.00	23.91	QP	NEUTRAL
6	0.70	-7.78	9.93	0.12	9.89	12.16	46.00	33.84	Average	NEUTRAL
7	1.30	2.68	9.87	0.16	9.90	22.61	56.00	33.39	QP	NEUTRAL
8	1.30	-15.37	9.87	0.16	9.90	4.56	46.00	41.44	Average	NEUTRAL
9	3.45	-5.68	9.85	0.18	9.87	14.22	56.00	41.78	QP	NEUTRAL
10	3.45	-17.75	9.85	0.18	9.87	2.15	46.00	43.85	Average	NEUTRAL
11	6.32	-0.33	9.86	0.21	9.85	19.59	60.00	40.41	QP	NEUTRAL
12	6.32	-9.71	9.86	0.21	9.85	10.21	50.00	39.79	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2025 CE report data\Q25103101-2E\1108 CE.EM6
Test Date : 2025-11-08 Tested By : Yisheng Ling
Power Supply : AC 240V/50Hz Test Mode : External charging mode
Condition : Temp:22.3°C,Humi:51.5% LISN : 2025 1# 216/NEUTRAL
Memo : S25103101-007

Data: 38

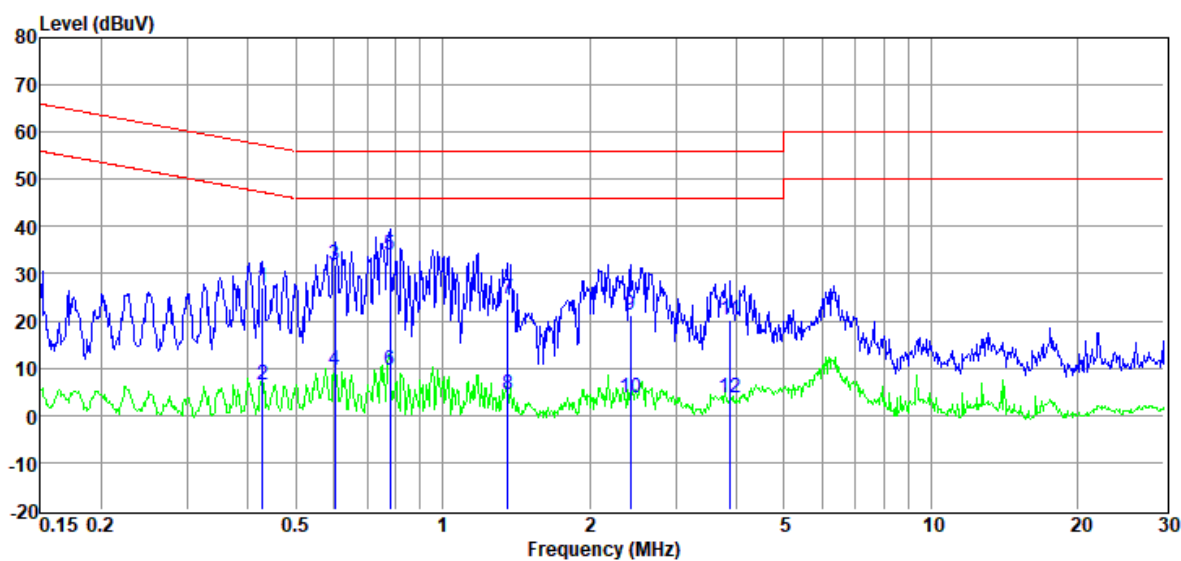

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.43	7.33	9.83	0.08	9.89	27.13	57.29	30.16	QP	NEUTRAL
2	0.43	-13.32	9.83	0.08	9.89	6.48	47.29	40.81	Average	NEUTRAL
3	0.60	12.09	9.88	0.11	9.89	31.97	56.00	24.03	QP	NEUTRAL
4	0.60	-10.36	9.88	0.11	9.89	9.52	46.00	36.48	Average	NEUTRAL
5	0.78	14.06	9.83	0.13	9.90	33.92	56.00	22.08	QP	NEUTRAL
6	0.78	-10.19	9.83	0.13	9.90	9.67	46.00	36.33	Average	NEUTRAL
7	1.36	4.65	9.86	0.16	9.90	24.57	56.00	31.43	QP	NEUTRAL
8	1.36	-15.65	9.86	0.16	9.90	4.27	46.00	41.73	Average	NEUTRAL
9	2.42	1.54	9.79	0.17	9.88	21.38	56.00	34.62	QP	NEUTRAL
10	2.42	-16.14	9.79	0.17	9.88	3.70	46.00	42.30	Average	NEUTRAL
11	3.88	0.13	9.87	0.18	9.87	20.05	56.00	35.95	QP	NEUTRAL
12	3.88	-16.07	9.87	0.18	9.87	3.85	46.00	42.15	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2025 CE report data\Q25103101-2E\1108 CE.EM6

Test Date : 2025-11-08

Tested By : Yisheng Ling

Power Supply : AC 240V/50Hz


Test Mode : External charging mode

Condition : Temp:22.3°C,Humi:51.5%

LISN : 2025 1# 216/LINE

Memo : S25103101-007

Data: 40

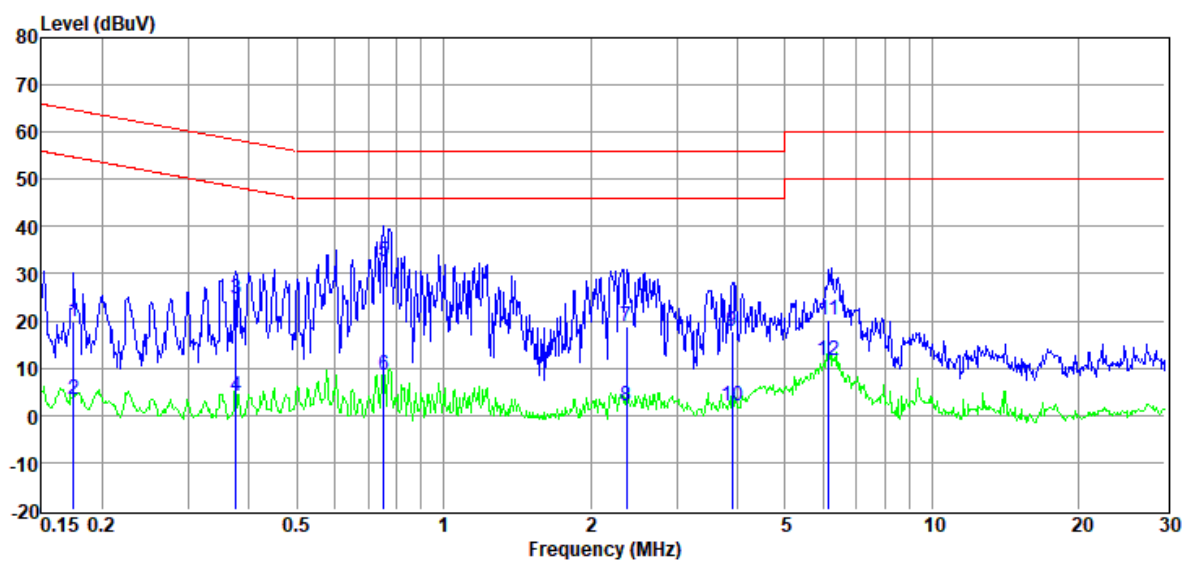

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.17	-0.02	9.84	0.06	9.89	19.77	64.72	44.95	QP	LINE
2	0.17	-16.40	9.84	0.06	9.89	3.39	54.72	51.33	Average	LINE
3	0.38	4.93	9.68	0.07	9.89	24.57	58.39	33.82	QP	LINE
4	0.38	-15.55	9.68	0.07	9.89	4.09	48.39	44.30	Average	LINE
5	0.75	12.75	9.82	0.13	9.90	32.60	56.00	23.40	QP	LINE
6	0.75	-11.37	9.82	0.13	9.90	8.48	46.00	37.52	Average	LINE
7	2.37	-0.92	9.84	0.17	9.88	18.97	56.00	37.03	QP	LINE
8	2.37	-17.90	9.84	0.17	9.88	1.99	46.00	44.01	Average	LINE
9	3.90	-2.26	9.99	0.18	9.87	17.78	56.00	38.22	QP	LINE
10	3.90	-18.03	9.99	0.18	9.87	2.01	46.00	43.99	Average	LINE
11	6.15	0.21	9.94	0.21	9.85	20.21	60.00	39.79	QP	LINE
12	6.15	-8.35	9.94	0.21	9.85	11.65	50.00	38.35	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

3.8. Test photo



4. Radiated Emissions


4.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
Pre-amplifier	SONOMA	310N	DDT-ZC00534	2026/07/06
Pre-amplifier	SONOMA	310N	DDT-ZC01970	2026/07/06
EMI Test Receiver	R&S	ESCI7	DDT-ZC01819	2026/03/28
EMI Test Receiver	R&S	ESCI 3	DDT-ZC01971	2026/03/28
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02048	2026/07/22
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02049	2026/07/11
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28
RF cable	DDT	H0.5M+1M+3M+(6M+4M)	DDT-ZC02533	2026/08/10
RF cable	DDT	V0.5M+1M+3M+(11M+6M)	DDT-ZC02534	2026/08/10
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026/08/10
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2026/08/11
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02644	/
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18
Spectrum Analyzer	Agilent	E4440A	DDT-ZC01445	2026/03/28
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Horn Antenna	SCHWARZBEC K	BBHA9120 D	DDT-ZC01218	2026/08/13
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026/08/10
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/
RF cable	Zhongke Junchuang	JCTB810-NJ-NJ-7M	DDT-ZC02759	2026/07/22


4.2. Block diagram of test setup

Below 1 GHz


For table-top equipment

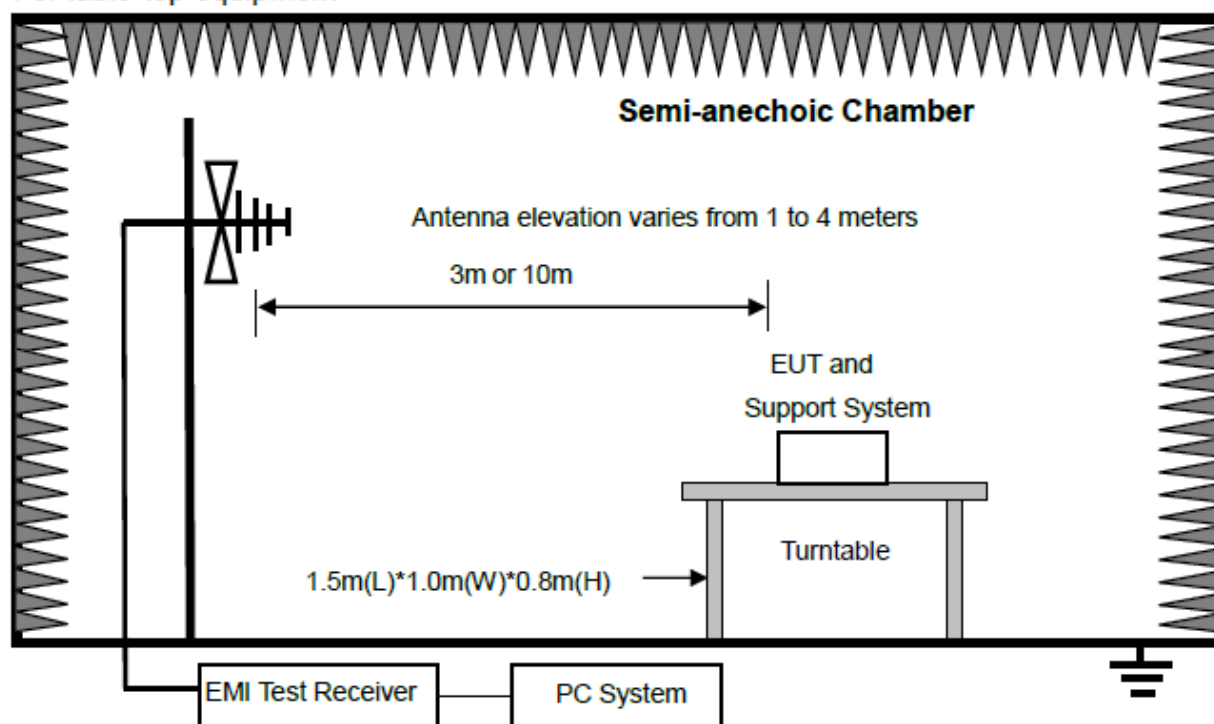

For floor standing equipment

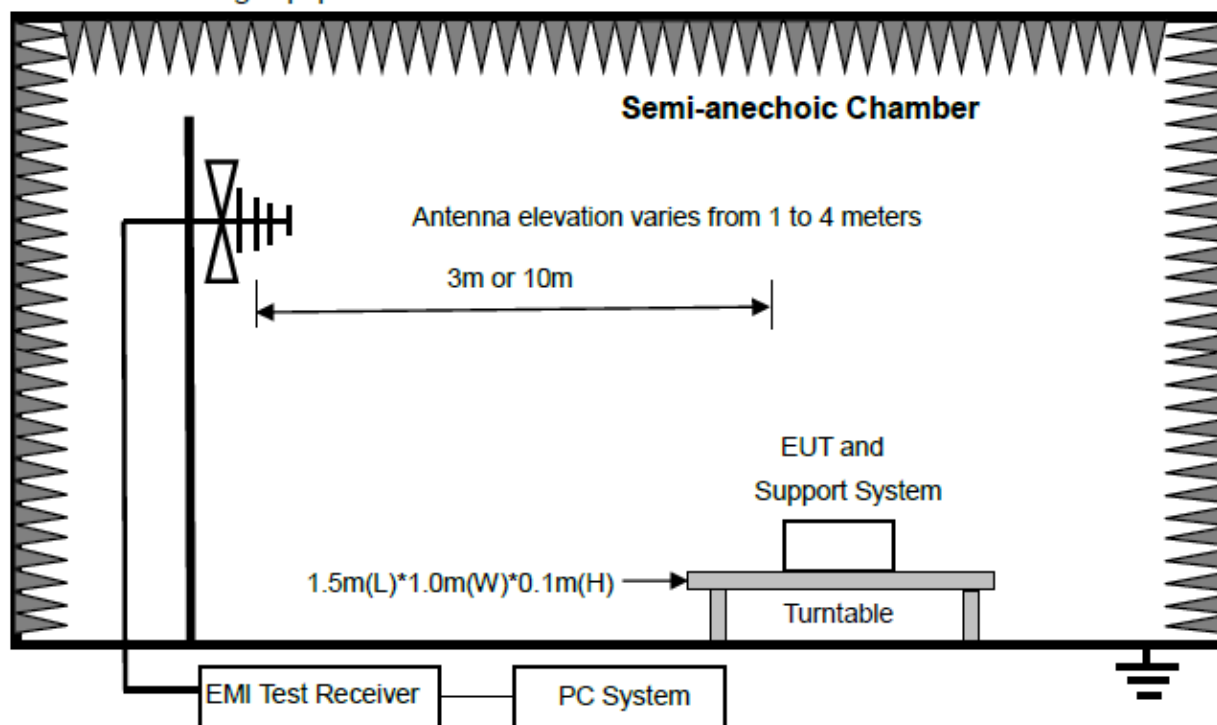


For combinations equipment

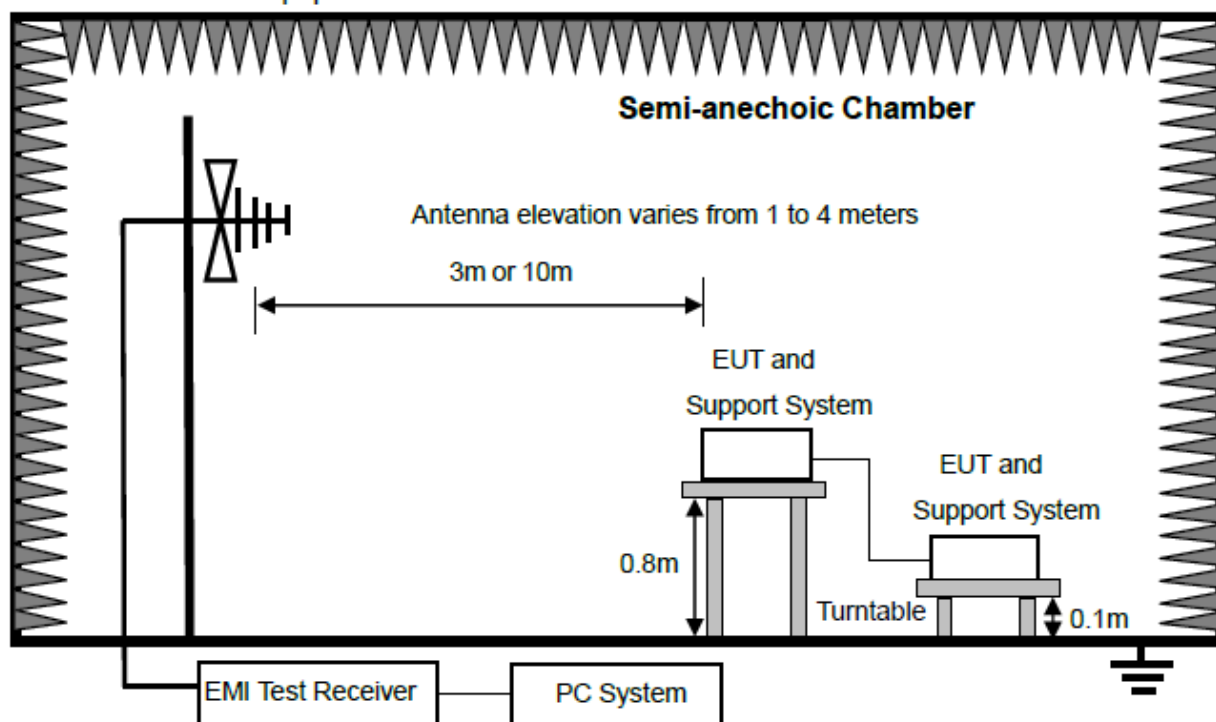


Above 1 GHz


For table-top equipment

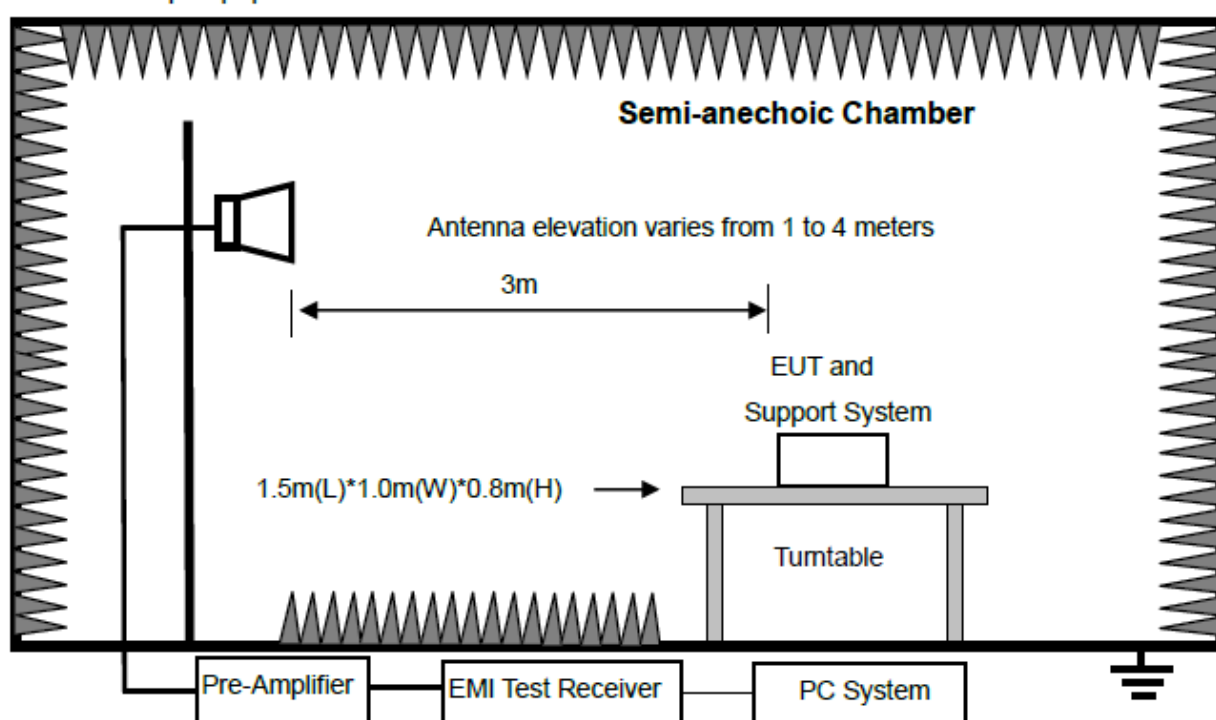

For floor standing equipment

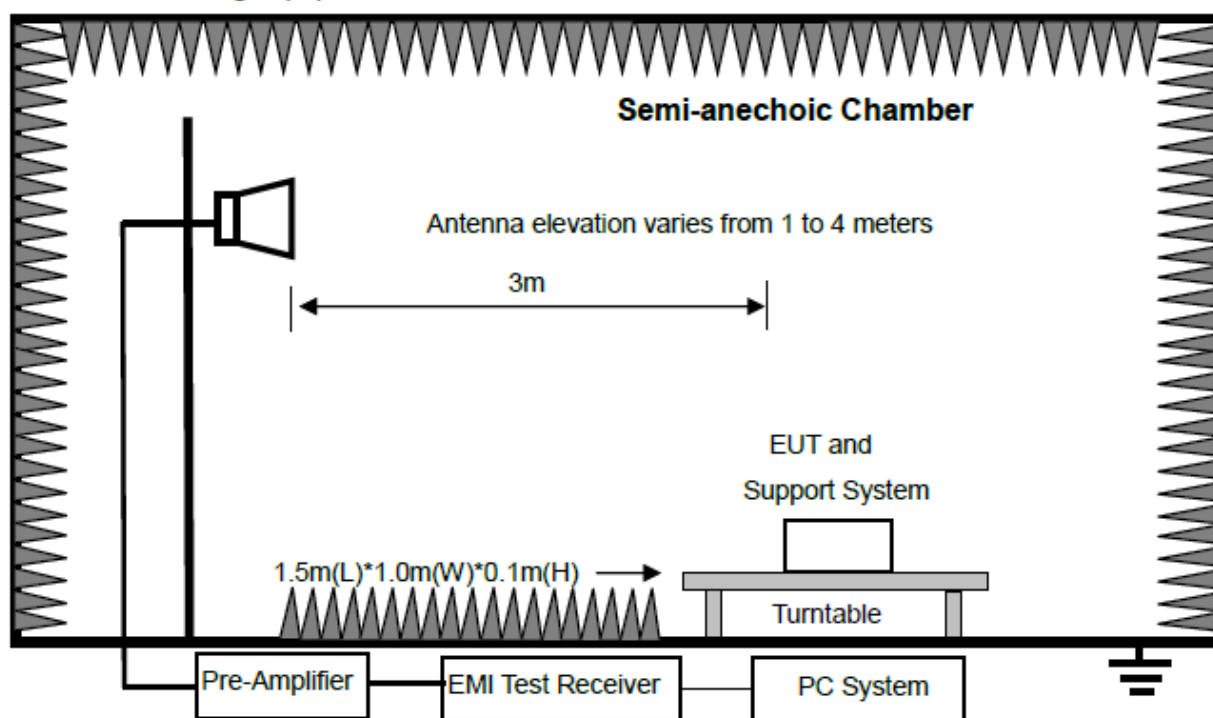

For combinations equipment

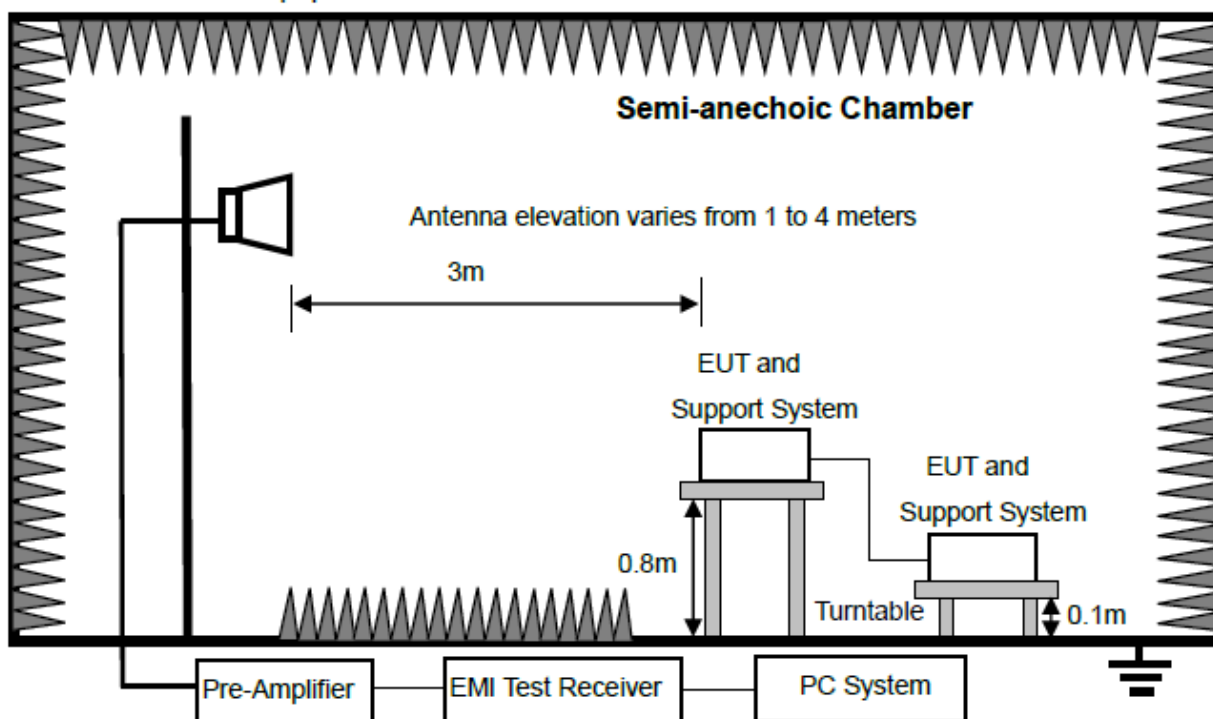

4.3. Limits

Class A			
Equipment	Frequency	Field Strengths Limits at 10m measuring distance dB(μV)/m	Field Strengths Limits at 3m measuring distance dB(μV)/m
Class A Equipment	30 MHz to 230 MHz	40	50
	230 MHz to 1 GHz	47	57
	1 GHz to 3 GHz	/	Average:56; Peak:76
	3 GHz to 6 GHz	/	Average:60; Peak:80
Class B			
Equipment	Frequency	Field Strengths Limits at 10m measuring distance dB(μV)/m	Field Strengths Limits at 3m measuring distance dB(μV)/m
Class B Equipment	30 MHz to 230 MHz	30	40
	230 MHz to 1 GHz	37	47
	1 GHz to 3 GHz	/	Average:50; Peak:70
	3 GHz to 6 GHz	/	Average:54; Peak:74
FM receivers*	30 MHz to 1 GHz	Fundamental 50	Fundamental 60
	30 MHz to 300 MHz	Harmonics 42	Harmonics 52
	300 MHz to 1 GHz	Harmonics 46	Harmonics 56

*: These relaxed limits apply only to emission at the fundamental and harmonic frequencies of the local oscillator signals at all other frequencies shall be compliant with the limits of class B equipment given above.

Note:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-110600C02	N/A	N/A
USB cable	N/A	N/A	Length: 1m	N/A

4.5. Test procedure

- (1) The EUT was placed on a non-metallic table (Refer to the 'Block diagram of test setup'). above the ground plane inside an anechoic chamber.
- (2) Test antenna center was located 3m or 10m from the EUT and assistant equipment boundary (imaginary circular periphery) on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN 55032 on radiated emission test.
- (3) Spectrum frequency from 30 MHz to 1 GHz/6 GHz was investigated.
- (4) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN 55032 on Radiated Emission test.
- (5) For emissions from 30 MHz to 1 GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.
- (6) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz VBW is set at 3 MHz.

4.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.

Note 2: "----" means Peak detection; "----" means Average detection.

4.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-11-05

Tested By: Mende Guo

Test Mode: External charging mode


Power Supply: AC 120V/60Hz

Condition: Temp:23.6°C;Humi:52.0%

Test Site: DDT 10M Chamber

File Path: d:\ts\2025 report data\Q25103101-2E\1104 10MRE\13

Memo: S25103101-007

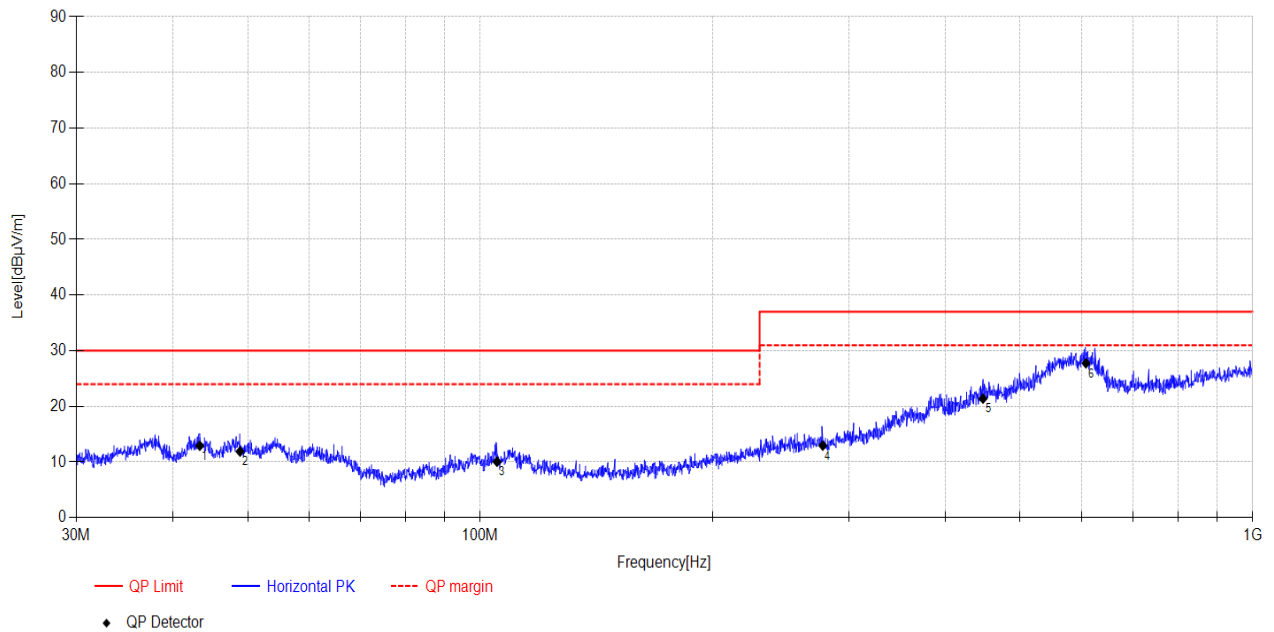

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	43.35	28.4	-15.48	12.92	30.00	17.08	QP	Horizontal
2	48.88	27.55	-15.66	11.89	30.00	18.11	QP	Horizontal
3	105.15	26.46	-16.40	10.06	30.00	19.94	QP	Horizontal
4	277.67	27.17	-14.22	12.95	37.00	24.05	QP	Horizontal
5	447.68	31.31	-9.92	21.39	37.00	15.61	QP	Horizontal
6	608.40	34.11	-6.36	27.75	37.00	9.25	QP	Horizontal

Note: 1. Result Level = Reading + Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-11-05

Tested By:Mende Guo

Test Mode:External charging mode


Power Supply:AC 120V/60Hz

Condition:Temp:23.6°C;Humi:52.0%

Test Site:DDT 10M Chamber

File Path:d:\ts\2025 report data\Q25103101-2E\1104 10MRE\14

Memo:S25103101-007

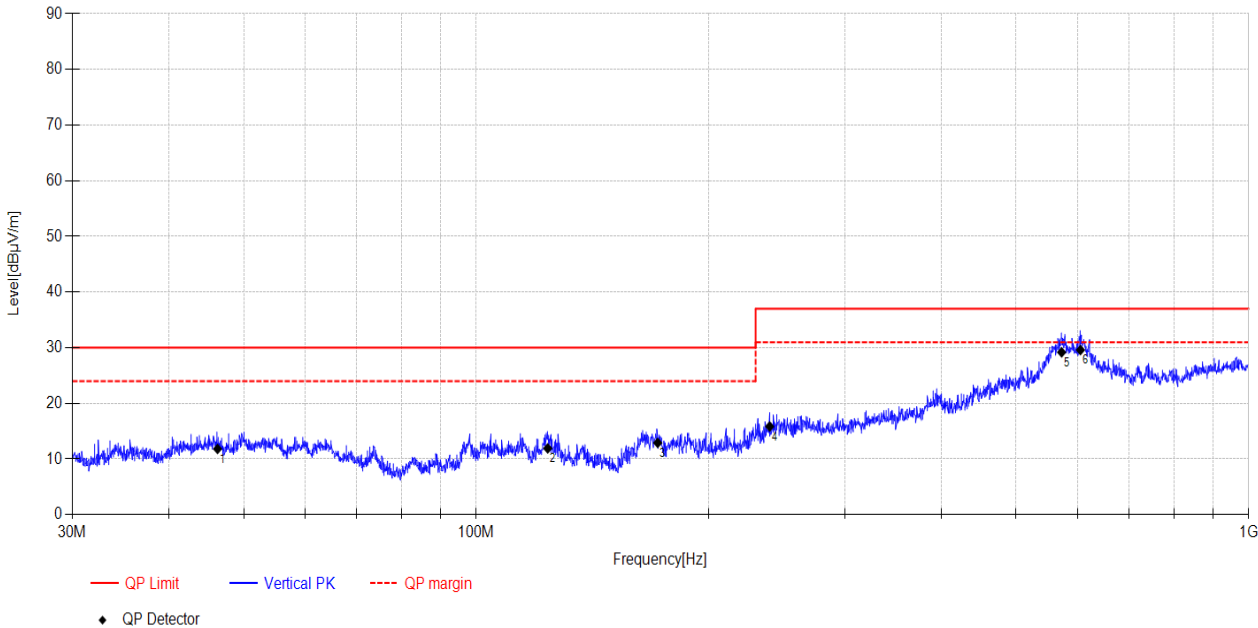

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.25	26.39	-14.57	11.82	30.00	18.18	QP	Vertical
2	123.76	29.81	-17.89	11.92	30.00	18.08	QP	Vertical
3	171.77	30.74	-17.83	12.91	30.00	17.09	QP	Vertical
4	239.86	30.27	-14.43	15.84	37.00	21.16	QP	Vertical
5	572.69	35.39	-6.21	29.18	37.00	7.82	QP	Vertical
6	605.74	35.32	-5.73	29.59	37.00	7.41	QP	Vertical

Note: 1. Result Level = Reading + Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Mende Guo

Test Mode:

External charging mode

Power Supply:

AC 240V/50Hz

Condition:

Temp:23.6°C;Humi:52.0%

Test Site:


DDT 10M Chamber

File Path:

d:\ts\2025 report data\Q25103101-2E\1104 10MRE\15

Memo:

S25103101-007

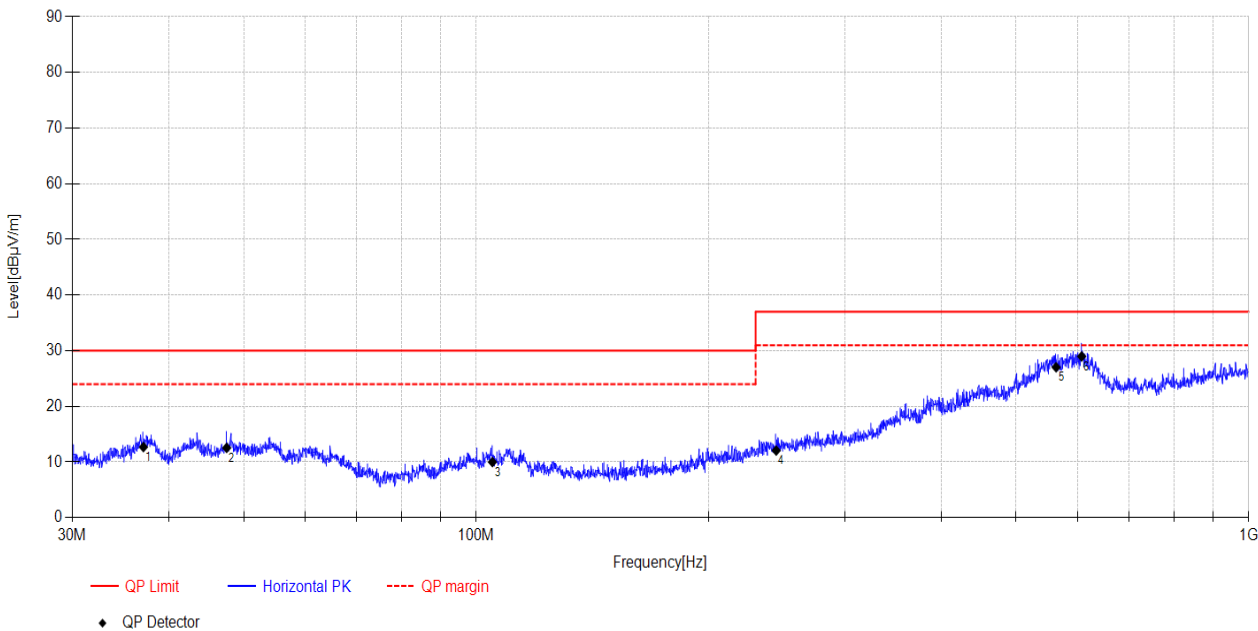

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37.09	29.55	-16.86	12.69	30.00	17.31	QP	Horizontal
2	47.53	27.81	-15.26	12.55	30.00	17.45	QP	Horizontal
3	104.96	26.29	-16.29	10.00	30.00	20.00	QP	Horizontal
4	244.53	27.12	-15.05	12.07	37.00	24.93	QP	Horizontal
5	563.24	34.61	-7.58	27.03	37.00	9.97	QP	Horizontal
6	607.86	35.38	-6.41	28.97	37.00	8.03	QP	Horizontal

Note: 1. Result Level = Reading + Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-11-05

Tested By:Mende Guo

Test Mode:External charging mode


Power Supply:AC 240V/50Hz

Condition:Temp:23.6°C;Humi:52.0%

Test Site:DDT 10M Chamber

File Path:d:\ts\2025 report data\Q25103101-2E\1104 10MRE\16

Memo:S25103101-007

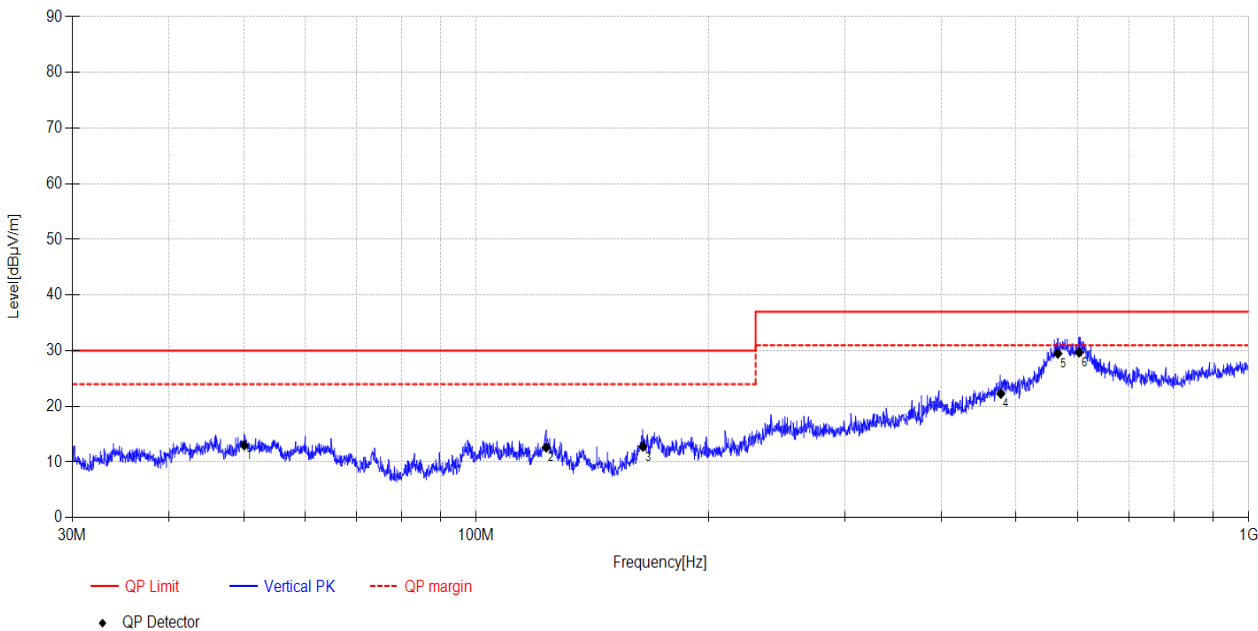

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	50.09	27.31	-14.30	13.01	30.00	16.99	QP	Vertical
2	123.22	30.59	-17.96	12.63	30.00	17.37	QP	Vertical
3	164.40	30.81	-18.03	12.78	30.00	17.22	QP	Vertical
4	477.68	30.8	-8.51	22.29	37.00	14.71	QP	Vertical
5	566.21	36.41	-6.93	29.48	37.00	7.52	QP	Vertical
6	603.09	35.37	-5.67	29.70	37.00	7.30	QP	Vertical

Note: 1. Result Level = Reading + Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-11-05

Tested By:Mende Guo

Test Mode:Internal charging mode


Power Supply:Battery

Condition:Temp:23.6°C;Humi:52.0%

Test Site:DDT 10M Chamber

File Path:d:\ts\2025 report data\Q25103101-2E\1104 10MRE\23

Memo:S25103101-007

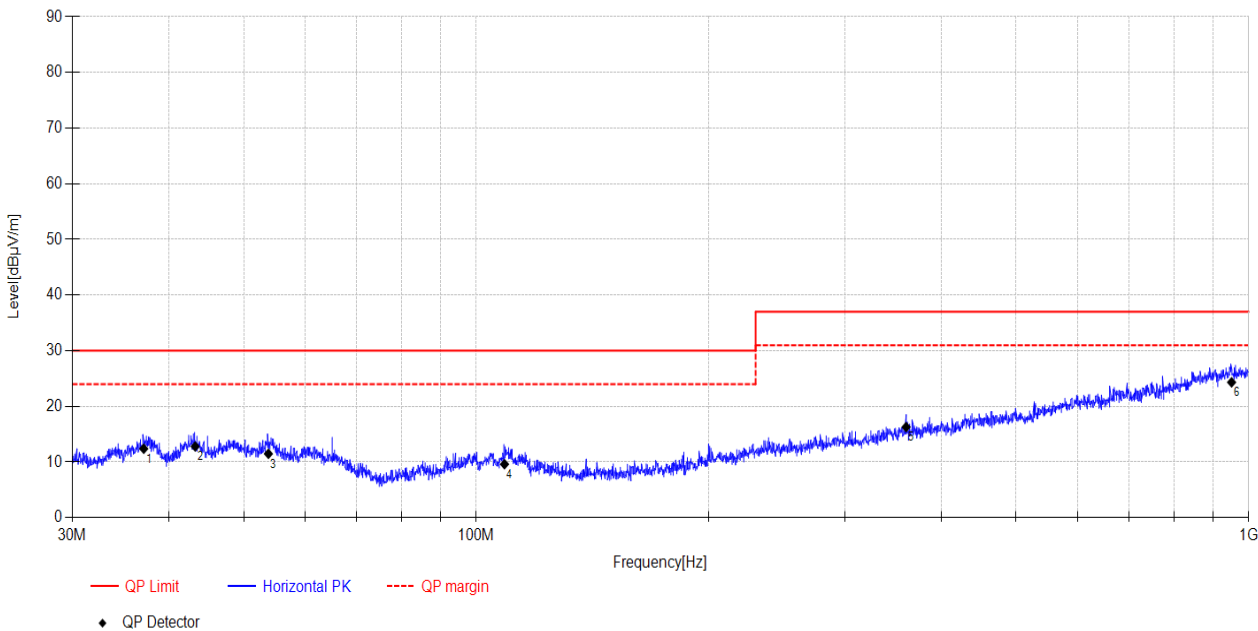

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37.12	29.25	-16.86	12.39	30.00	17.61	QP	Horizontal
2	43.27	28.26	-15.46	12.80	30.00	17.20	QP	Horizontal
3	53.83	26.82	-15.34	11.48	30.00	18.52	QP	Horizontal
4	108.80	26.05	-16.44	9.61	30.00	20.39	QP	Horizontal
5	360.22	28.03	-11.75	16.28	37.00	20.72	QP	Horizontal
6	950.44	24.56	-0.23	24.33	37.00	12.67	QP	Horizontal

Note: 1. Result Level = Reading + Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-11-05

Tested By:

Mende Guo

Test Mode:

Internal charging mode

Power Supply:

Battery

Condition:

Temp:23.6°C;Humi:52.0%

Test Site:


DDT 10M Chamber

File Path:

d:\ts\2025 report data\Q25103101-2E1104 10MRE\24

Memo:

S25103101-007

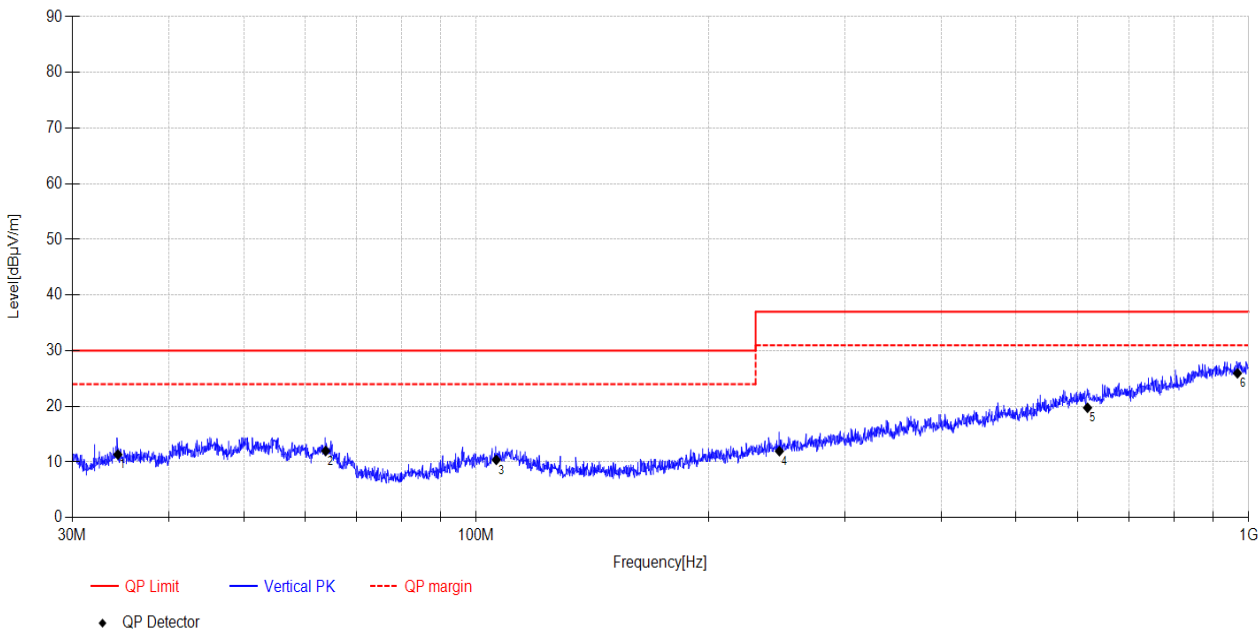

Final Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	34.37	28.44	-17.09	11.35	30.00	18.65	QP	Vertical
2	63.86	28.02	-16.03	11.99	30.00	18.01	QP	Vertical
3	106.17	26.39	-16.00	10.39	30.00	19.61	QP	Vertical
4	246.90	26.15	-14.19	11.96	37.00	25.04	QP	Vertical
5	618.61	25.32	-5.57	19.75	37.00	17.25	QP	Vertical
6	967.24	25.51	0.44	25.95	37.00	11.05	QP	Vertical

Note: 1. Result Level = Reading + Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-11-09

Power Supply

: AC 240V/50Hz

Condition

: Temp:24.9°C,Humi:68.3%

Memo

: S25103101-007

D:\2025 RE 1# Report data\Q25103101-2E\1109 RE-H CE.EM6

Tested By

: Aaron Liu


Test Mode

: External charging mode

Antenna/Distance

: 2025 9120D 1#/3m/
VERTICAL

Data: 5

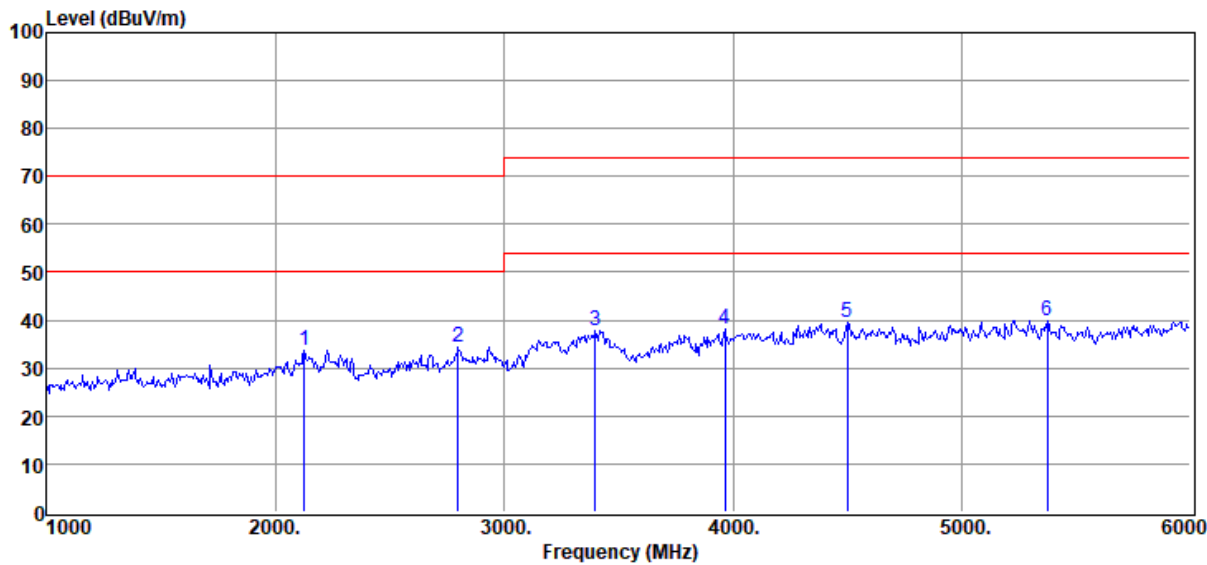

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2125.00	54.77	27.20	53.09	4.91	33.79	70.00	36.21	Peak	VERTICAL
2	2800.00	53.52	28.30	53.02	5.47	34.27	70.00	35.73	Peak	VERTICAL
3	3400.00	56.69	28.40	53.24	5.99	37.84	74.00	36.16	Peak	VERTICAL
4	3965.00	55.34	29.76	53.58	6.49	38.01	74.00	35.99	Peak	VERTICAL
5	4500.00	55.26	30.90	53.40	6.76	39.52	74.00	34.48	Peak	VERTICAL
6	5375.00	53.86	32.60	53.69	7.26	40.03	74.00	33.97	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-11-09

Power Supply

: AC 240V/50Hz

Condition

: Temp:24.9°C,Humi:68.3%

Memo

: S25103101-007

D:\2025 RE 1# Report data\Q25103101-2E\1109 RE-H CE.EM6

Tested By

: Aaron Liu


Test Mode

: External charging mode

Antenna/Distance

: 2025 9120D 1#/3m/
HORIZONTAL

Data: 6

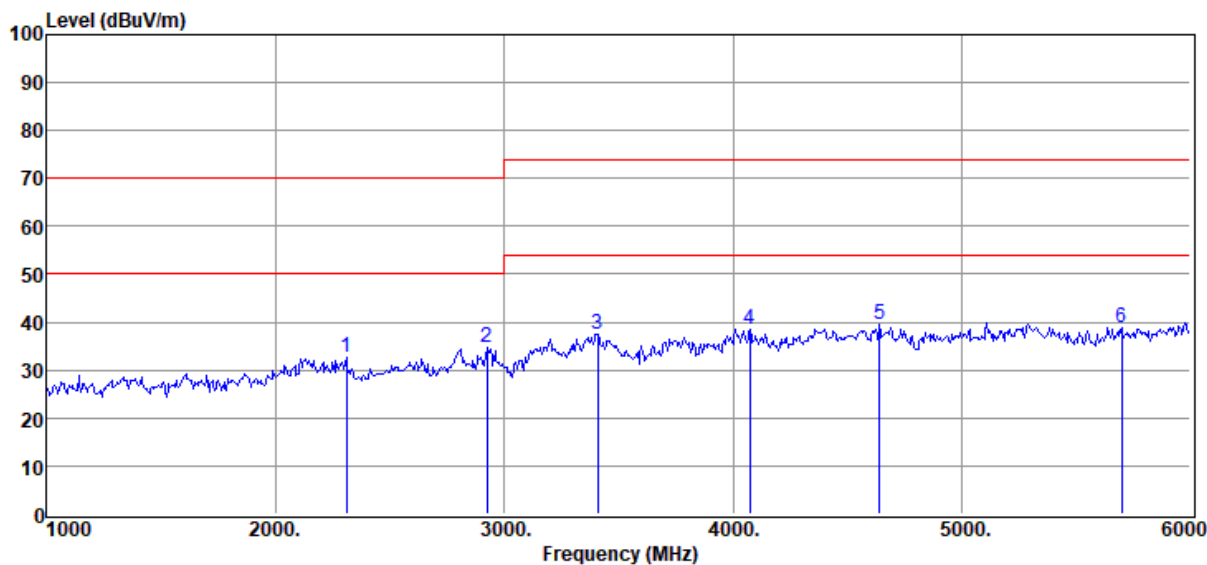

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2310.00	53.68	27.00	53.07	5.06	32.67	70.00	37.33	Peak	HORIZONTAL
2	2925.00	53.71	28.35	53.01	5.57	34.62	70.00	35.38	Peak	HORIZONTAL
3	3410.00	56.36	28.48	53.25	5.99	37.58	74.00	36.42	Peak	HORIZONTAL
4	4075.00	55.46	30.10	53.57	6.56	38.55	74.00	35.45	Peak	HORIZONTAL
5	4640.00	54.72	31.40	53.34	6.83	39.61	74.00	34.39	Peak	HORIZONTAL
6	5700.00	52.98	32.50	54.11	7.49	38.86	74.00	35.14	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-11-09

Power Supply

: AC 120V/60Hz

Condition

: Temp:24.9°C,Humi:68.3%

Memo

: S25103101-007

D:\2025 RE 1# Report data\Q25103101-2E\1109 RE-H CE.EM6

Tested By

: Aaron Liu


Test Mode

: External charging mode

Antenna/Distance

: 2025 9120D 1#/3m/
HORIZONTAL

Data: 7

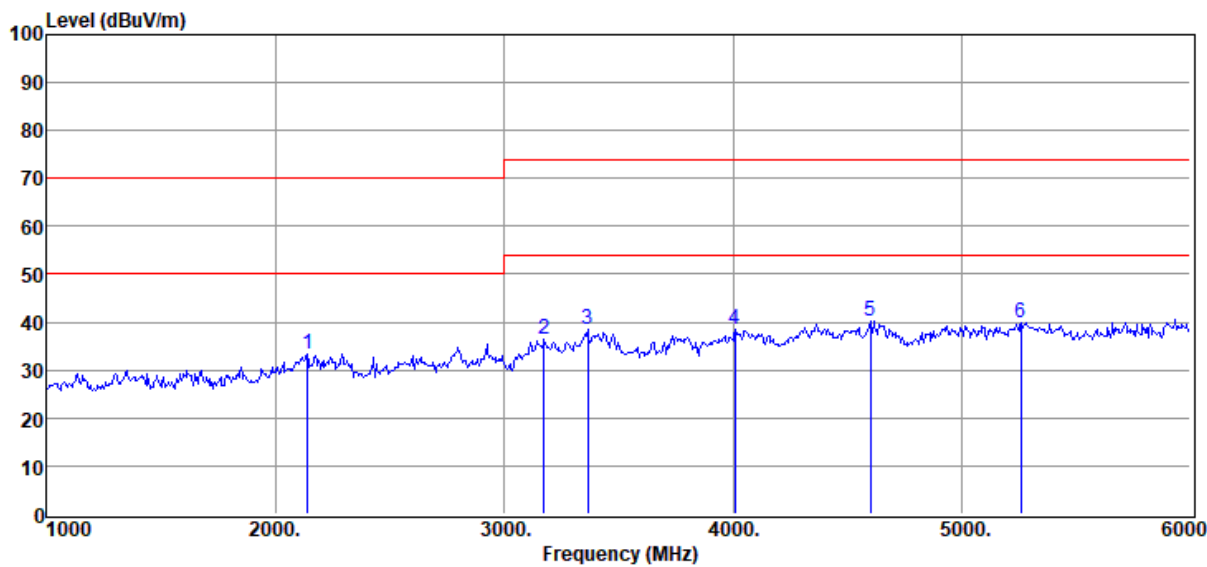

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2140.00	54.32	27.20	53.09	4.92	33.35	70.00	36.65	Peak	HORIZONTAL
2	3175.00	55.02	28.60	53.10	5.79	36.31	74.00	37.69	Peak	HORIZONTAL
3	3365.00	56.78	28.89	53.22	5.95	38.40	74.00	35.60	Peak	HORIZONTAL
4	4010.00	55.62	29.92	53.60	6.52	38.46	74.00	35.54	Peak	HORIZONTAL
5	4600.00	55.66	31.00	53.36	6.81	40.11	74.00	33.89	Peak	HORIZONTAL
6	5260.00	53.44	32.92	53.54	7.18	40.00	74.00	34.00	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-11-09

Power Supply

: AC 120V/60Hz

Condition

: Temp:24.9°C,Humi:68.3%

Memo

: S25103101-007

D:\2025 RE 1# Report data\Q25103101-2E\1109 RE-H CE.EM6

Tested By

: Aaron Liu


Test Mode

: External charging mode

Antenna/Distance

: 2025 9120D 1#/3m/
VERTICAL

Data: 8

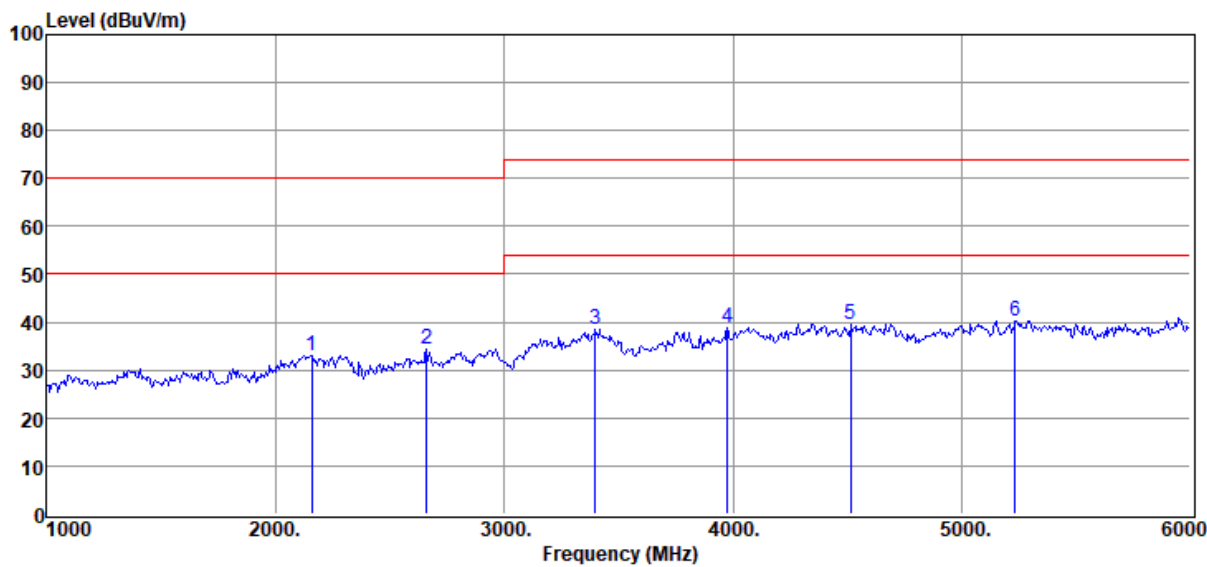

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2160.00	54.08	27.20	53.08	4.94	33.14	70.00	36.86	Peak	VERTICAL
2	2660.00	54.22	27.94	53.03	5.35	34.48	70.00	35.52	Peak	VERTICAL
3	3400.00	57.23	28.40	53.24	5.99	38.38	74.00	35.62	Peak	VERTICAL
4	3975.00	56.10	29.80	53.58	6.50	38.82	74.00	35.18	Peak	VERTICAL
5	4515.00	55.23	30.96	53.39	6.77	39.57	74.00	34.43	Peak	VERTICAL
6	5235.00	53.83	32.88	53.51	7.16	40.36	74.00	33.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-11-09

Power Supply

: Battery

Condition

: Temp:24.9°C,Humi:68.3%

Memo

: S25103101-007

D:\2025 RE 1# Report data\Q25103101-2E\1109 RE-H CE.EM6

Tested By

: Aaron Liu


Test Mode

: Internal charging mode

Antenna/Distance

: 2025 9120D 1#/3m/
VERTICAL

Data: 9

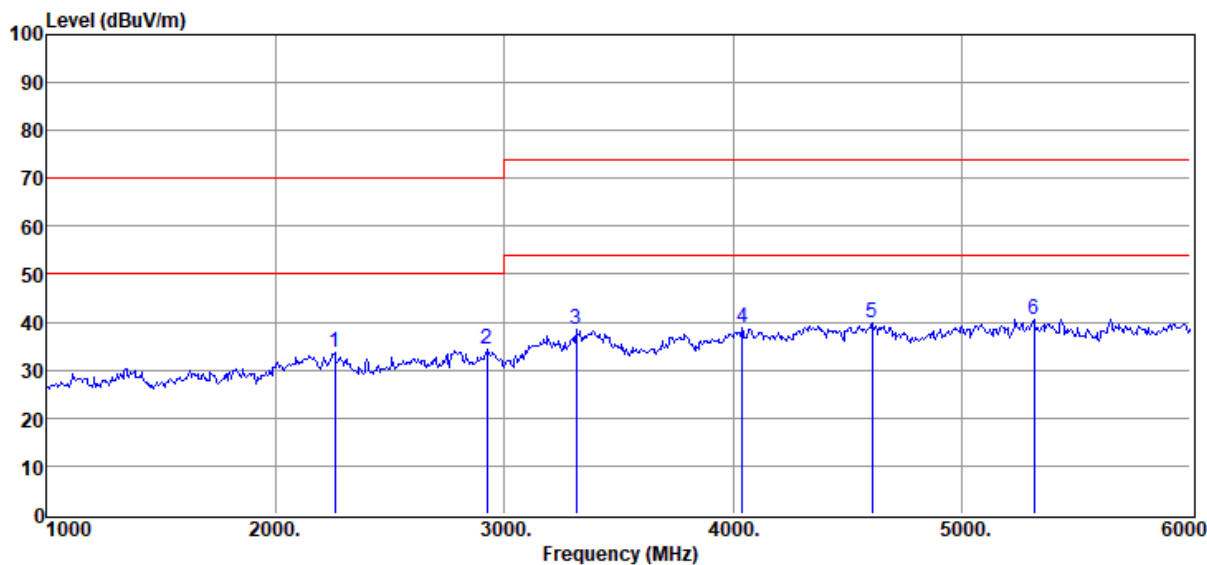

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2260.00	54.92	26.90	53.07	5.02	33.77	70.00	36.23	Peak	VERTICAL
2	2925.00	53.37	28.35	53.01	5.57	34.28	70.00	35.72	Peak	VERTICAL
3	3315.00	56.72	28.96	53.19	5.91	38.40	74.00	35.60	Peak	VERTICAL
4	4040.00	55.99	29.98	53.58	6.54	38.93	74.00	35.07	Peak	VERTICAL
5	4610.00	55.18	31.10	53.36	6.81	39.73	74.00	34.27	Peak	VERTICAL
6	5315.00	54.54	32.48	53.61	7.22	40.63	74.00	33.37	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

Test Date

: 2025-11-09

Power Supply

: Battery

Condition

: Temp:24.9°C,Humi:68.3%

Memo

: S25103101-007

D:\2025 RE 1# Report data\Q25103101-2E\1109 RE-H CE.EM6

Tested By

: Aaron Liu


Test Mode

: Internal charging mode

Antenna/Distance

: 2025 9120D 1#/3m/
HORIZONTAL


Data: 10

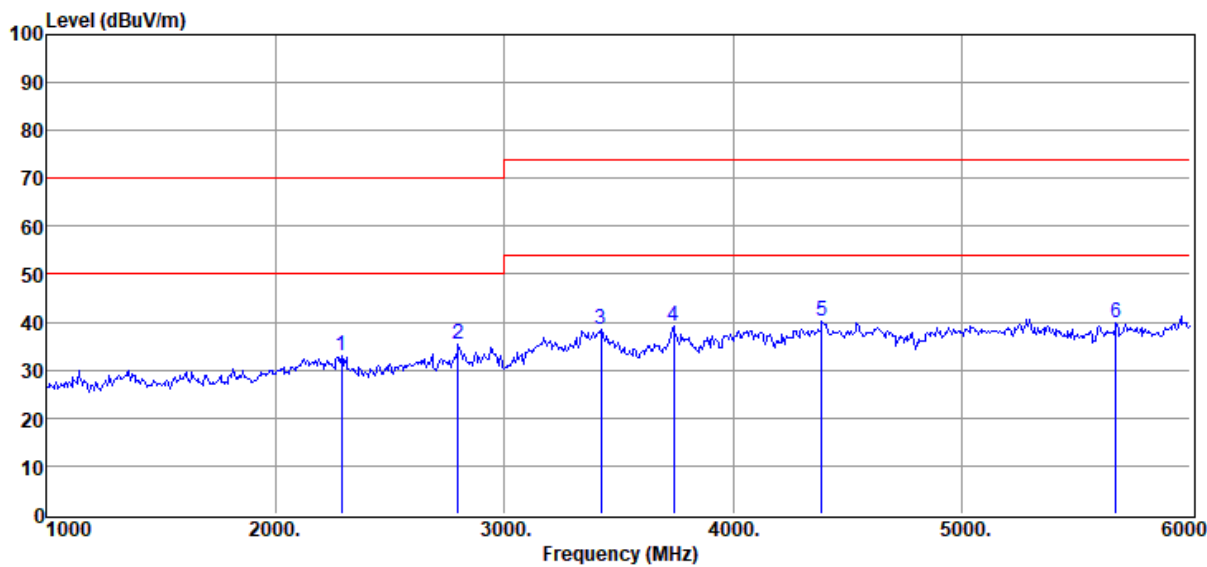

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Detector	Polarization
1	2290.00	54.01	26.90	53.07	5.05	32.89	70.00	37.11	Peak	HORIZONTAL
2	2800.00	54.80	28.30	53.02	5.47	35.55	70.00	34.45	Peak	HORIZONTAL
3	3425.00	57.10	28.60	53.26	6.01	38.45	74.00	35.55	Peak	HORIZONTAL
4	3740.00	56.80	29.46	53.44	6.29	39.11	74.00	34.89	Peak	HORIZONTAL
5	4390.00	56.14	30.72	53.44	6.71	40.13	74.00	33.87	Peak	HORIZONTAL
6	5675.00	53.89	32.75	54.08	7.47	40.03	74.00	33.97	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

4.8. Test photo

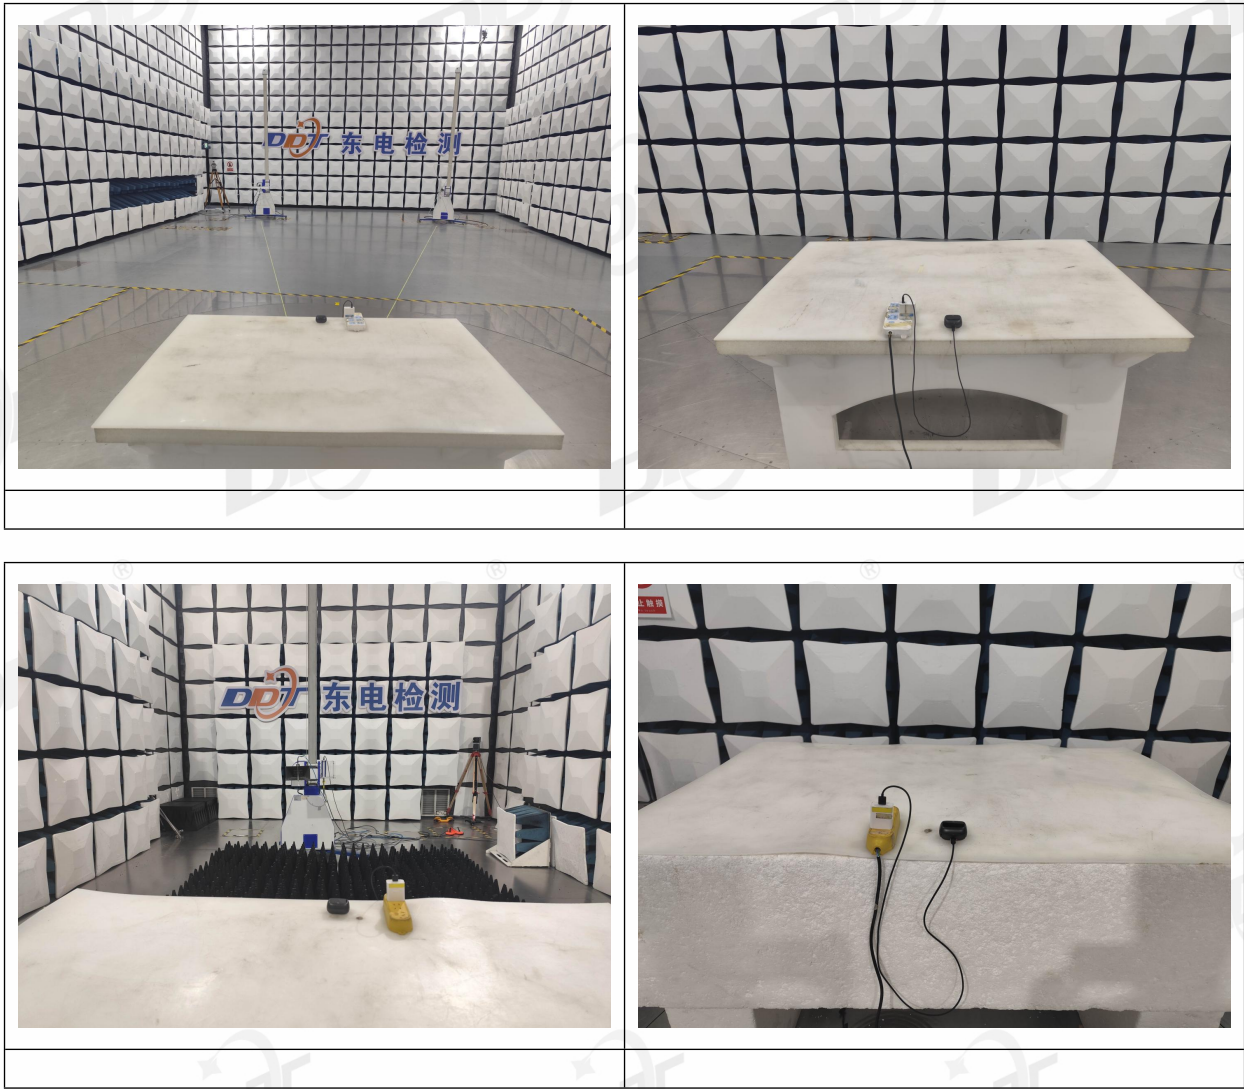


5. Voltage Fluctuations& Flicker Test

5.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
Harmonics&Flicker Analyzer	emtest	DPA503N	DDT-ZC04145	2026/10/19
Flicker impedance	AMETEK CTS	AIF 503N32.4	DDT-ZC04558	2026/10/19
NET.CONTROL	EM TEST	N/A	DDT-ZC00795	/
Electronic Power Source	emtest	NetWave 20-400	DDT-ZC04144	2026/03/28

5.2. Block diagram of test setup

Table-top device

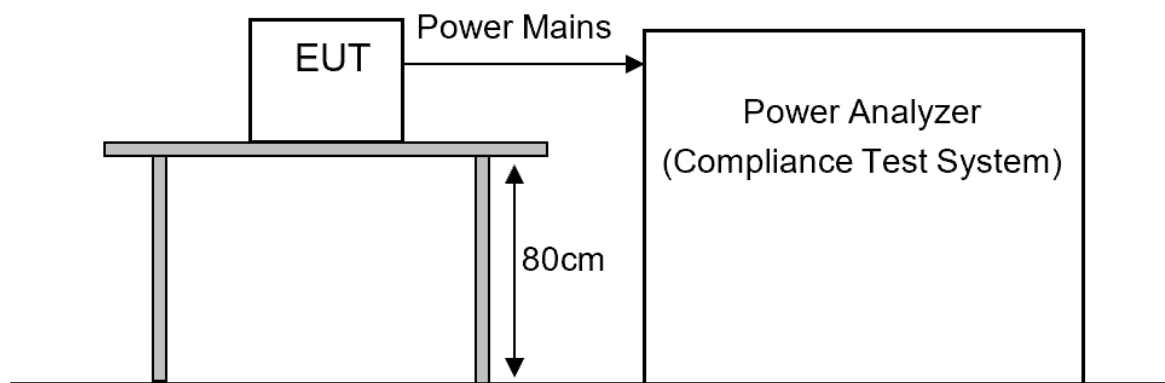

Floor-standing device

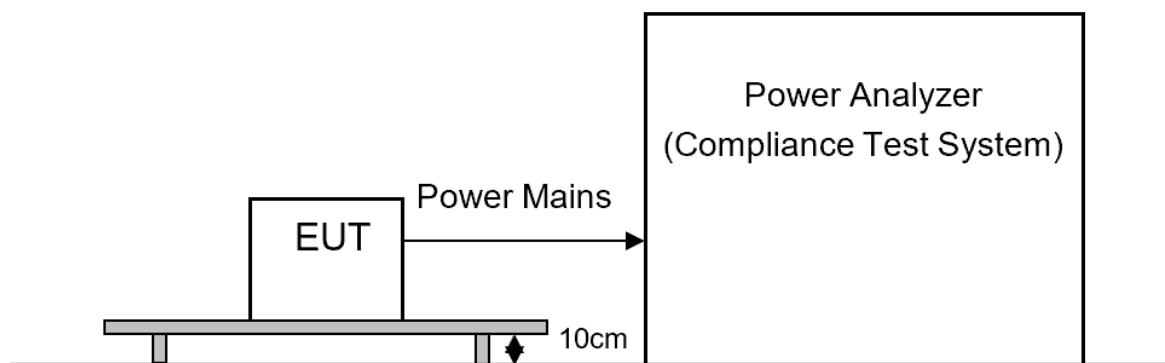

5.3. Test levels and performance criterion

Voltage fluctuations & flicker Limit

Test Item	Limit	Note
Pst	1.0	Pst means Short-term flicker indicator
Plt	0.65	Plt means long-term flicker indicator
Tdt	0.5	Tdt means maximum time that dt exceeds 3.3%
dmax (%)	4%	dmax means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change.

5.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

5.5. Test procedure

The EUT is placed on top of a wooden table (according to the standard height requirements, refer to the test layout), the most unfavorable sequence of voltage changes under normal conditions during the flick measurement; the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

5.6. Test result

Pass. (See below detailed test result)

5.7. Test data

Test Report			
Report Number :	20251106 Q25103101-2E External charging mode Flicker		
Test Object :	BLUETOOTH HEADSET		
Test Standard :	IEC 61000-3-3 (Ed3-2) - General Test conditions (230V - 50Hz)		
Tester :	Xuhui Liu		
Company :	Guangdong Dongdian Testing Service Co., Ltd.		
Test Date :	11/6/2025 3:14:26 AM		

Result			
E.U.T. :	PASS		

Test Object / Product			
Name :	BLUETOOTH HEADSET	Operation Mode :	External charging mode
Serial Number :	S25103101-007	Connection :	/
Description :	LIVE BEAM 4		

Climatic Conditions			
Temperature :	24 °C	Pressure :	101 kPa
		Humidity :	48 %

Flicker Results	
Standard Specific Results for IEC 61000-3-3 (Edition 3.2)	

Standard Group: Industry

Standard Name: IEC 61000-3-3 (Edition 3.2)

Limitation of voltage changes, voltage fluctuations and flicker
in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase
and not subject to conditional connection

Test Condition: General Test Conditions

Analysis Status: PASS

Flicker Measurements Settings

Main Line: 230V, 50Hz
Flicker Meter: 230V / 50Hz
Flicker Impedance: Zref
Observation Time: 1 × 10 min
Measurements: 1

Flicker Measurements

	Last V_{rms} [V]	P_{It}	Max P_{st}	Max d_c [%]	Max d_{max} [%]	Max T_{max} [s]
Line 1:	230.872	0.035	0.079	0	< 0.2	0
Limits:		0.65	1	3.3	4	0.5
Results:		PASS	PASS	PASS	PASS	PASS


Flicker Individual Measurements

Measurement	P_{st} []			d_c [%]			d_{max} [%]			T_{max} [s]		
	Value	Limit	Result	Value	Limit	Result	Value	Limit	Result	Value	Limit	Result
#1	0.08	1.00	PASS	0.00	3.30	PASS	< 0.2	4.00	PASS	0.00	0.50	PASS

Pst Data

Flicker (Line 1)

Meas. No.	P0,1	P1s	P3s	P10s	P50s	Pst	dc [%]	dmax [%]	Tmax [s]
1	0.016	0.014	0.013	0.012	0.009	0.079	0	0.121	0

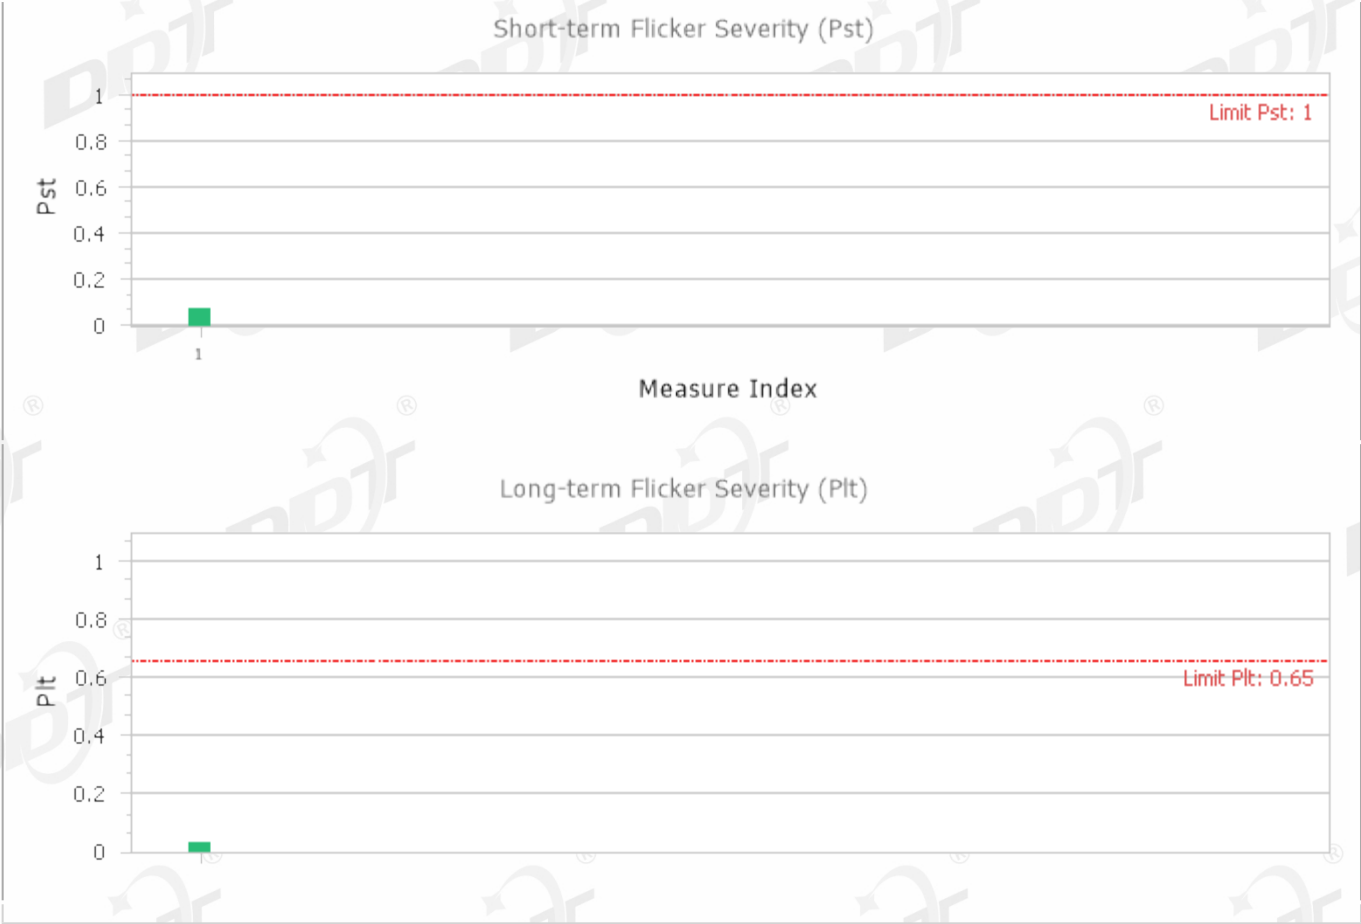

5.8. Test photo




6. Electrostatic Discharge Test

6.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
ESD Generator	TESEQ	NSG 437	DDT-ZC01820	2026/04/01

6.2. Block diagram of test setup

Table-top equipment

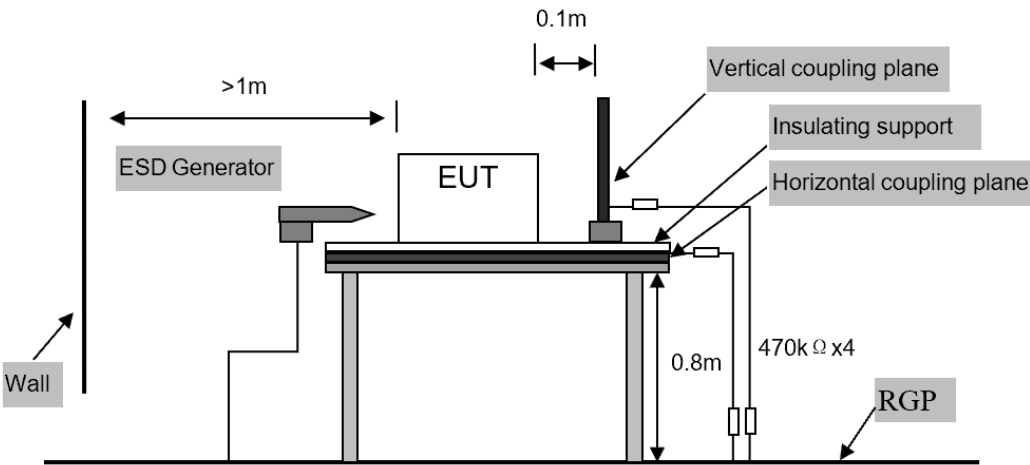

Floor-standing equipment

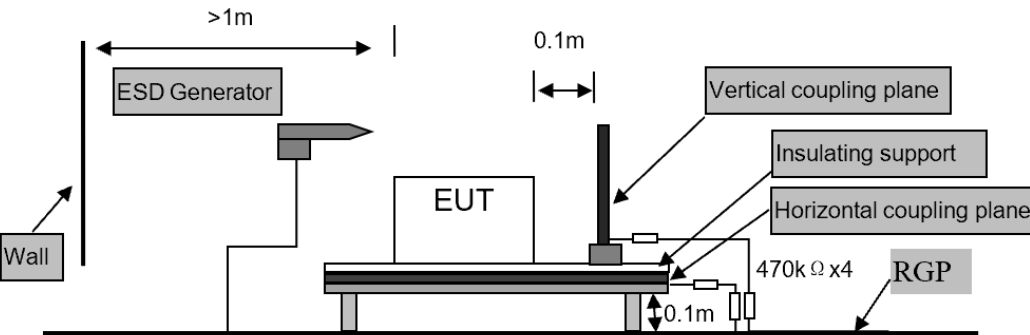

6.3. Test levels and performance criterion

Test Level		Performance Criteria
Air Discharge	±2kV, ±4kV and ±8kV	B
Contact Discharge	±4kV	
Performance criteria B description: During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of		

performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended.

6.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

6.5. Test procedure

Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

Contact Discharge:

All the procedure was same as air discharge. Except that the generator was re-triggered for a new single discharge. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

Indirect discharge for horizontal coupling plane:

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

Indirect discharge for vertical coupling plane:

At least 20 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

6.6. Test result

Test Site: 7#EMC Shield Room	Test Date: 2025/11/06--2025/11/06
Condition: 22°C,55%RH,101kPa	Test Engineer: Elosky Liu
Memo: /	


EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007			Test Mode: Internal charging mode		
Power supply: Battery			Memo:/		
Measure parameters: 20 times at each point for contact discharge; 20 times at each point for air discharge. 1 second interval for each discharge.					
Type of discharge	Test Level	Test Point	Required	Observation	Result
Contact to EUT	±4kV	3,4	B	A	Pass
Contact to Coupling Planes	±4kV	Coupling Planes	B	A	Pass
Air	±2 kV /±4 kV /±8kV	1,2,3,4,5,6,7,8	B	A	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser.					

EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007			Test Mode: External charging mode		
Power supply: AC 230V/50Hz			Memo:/		
Measure parameters: 20 times at each point for contact discharge; 20 times at each point for air discharge. 1 second interval for each discharge.					
Type of discharge	Test Level	Test Point	Required	Observation	Result
Contact to EUT	±4kV	3	B	A	Pass
Contact to Coupling Planes	±4kV	Coupling Planes	B	A	Pass
Air	±2 kV /±4 kV /±8kV	1,2,3,4,5,6,7,8	B	B	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser. B: During the test, when an air static electricity of ±8kV was applied to point 3/4, the red indicator light of the prototype went out. It automatically returned to normal after 1 second, and resumed normal charging operation after the test was completed.					

6.7. ESD test points



6.8. Test photo

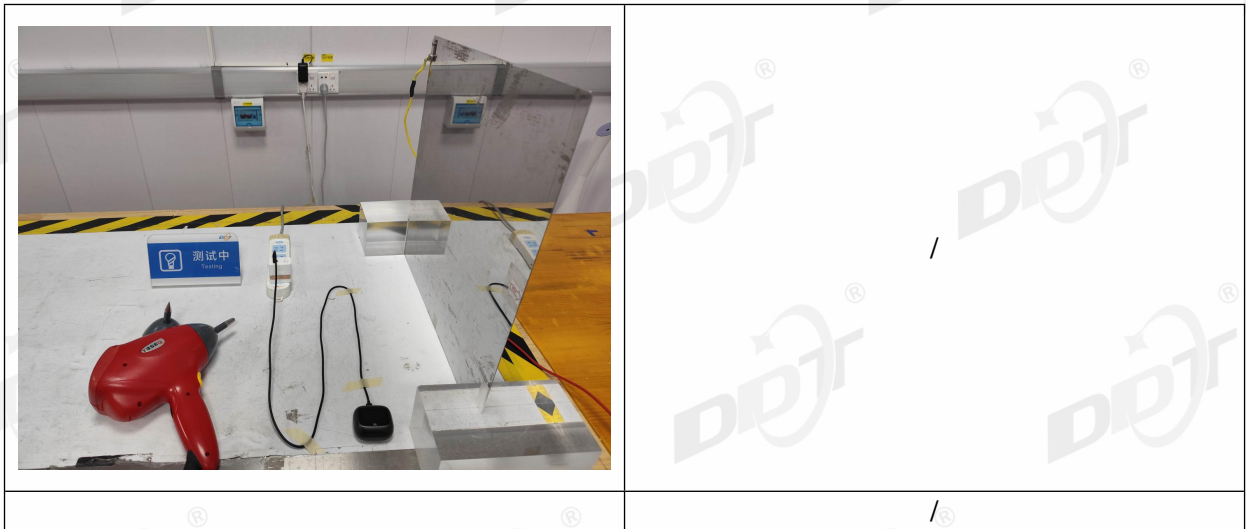


7. Continuous Radio Frequency Disturbances Test

7.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
Power meter	Agilent	E4417A	DDT-ZC00934	2026/07/06
Power sensor	Agilent	E9323A	DDT-ZC00938	2026/08/10
Power sensor	Agilent	E9323A	DDT-ZC00939	2026/08/10
RS Test Software	SKET	EMC-S	DDT-ZC01455	/
Log-Periodic Antenna	schwarzbeck	STLP 9129	DDT-ZC04673	2026/10/19
Audio Analyzer	R&S	UPL	DDT-ZC04520	2026/10/19
Field probe	PMM	EP-601	DDT-ZC00933	2026/01/08
MXG Vector Signal Generator	Agilent	N5181A	DDT-ZC05321	2026/10/19
Power Amplifier	Micotop	MPA-80-1000-250	DDT-ZC05601	2026/10/19
Power Amplifier	Micotop	MPA-1000-6000-100	DDT-ZC05602	2026/10/19
Matrix Switch	SKET	LDSPDT80M6G	DDT-ZC05734	/

7.2. Block diagram of test setup

Table-top device

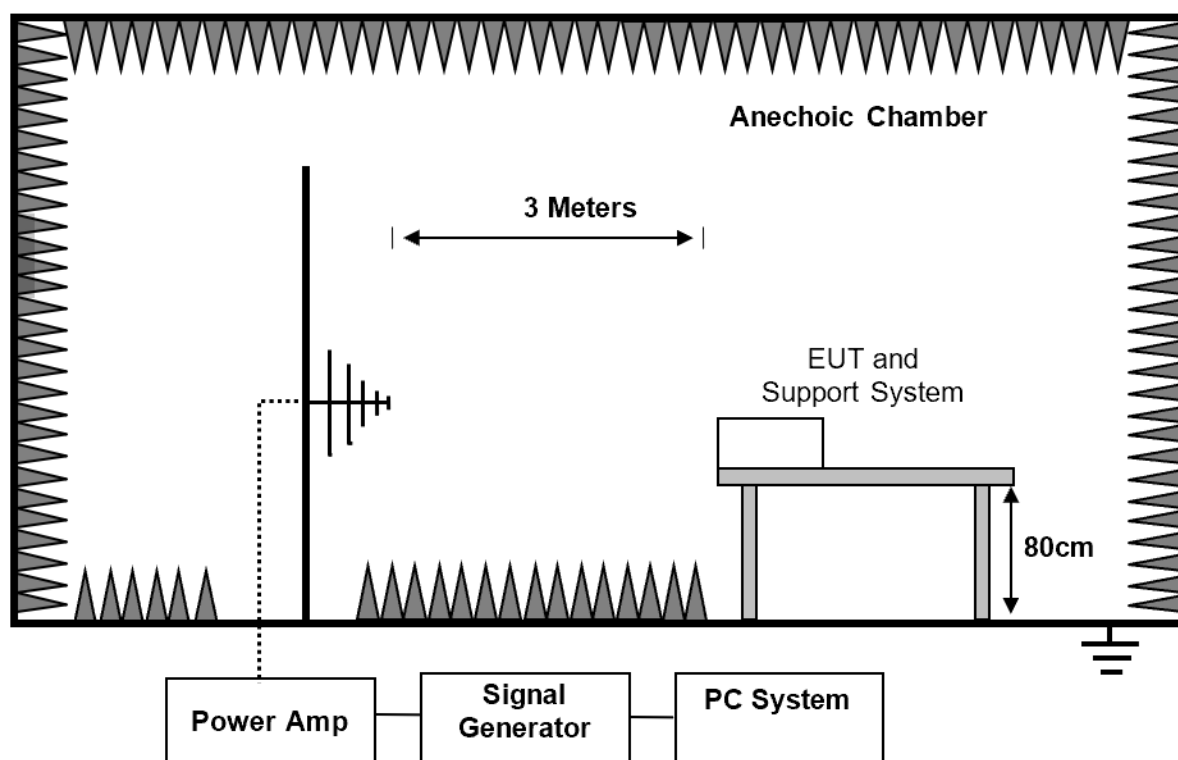

Floor-standing device

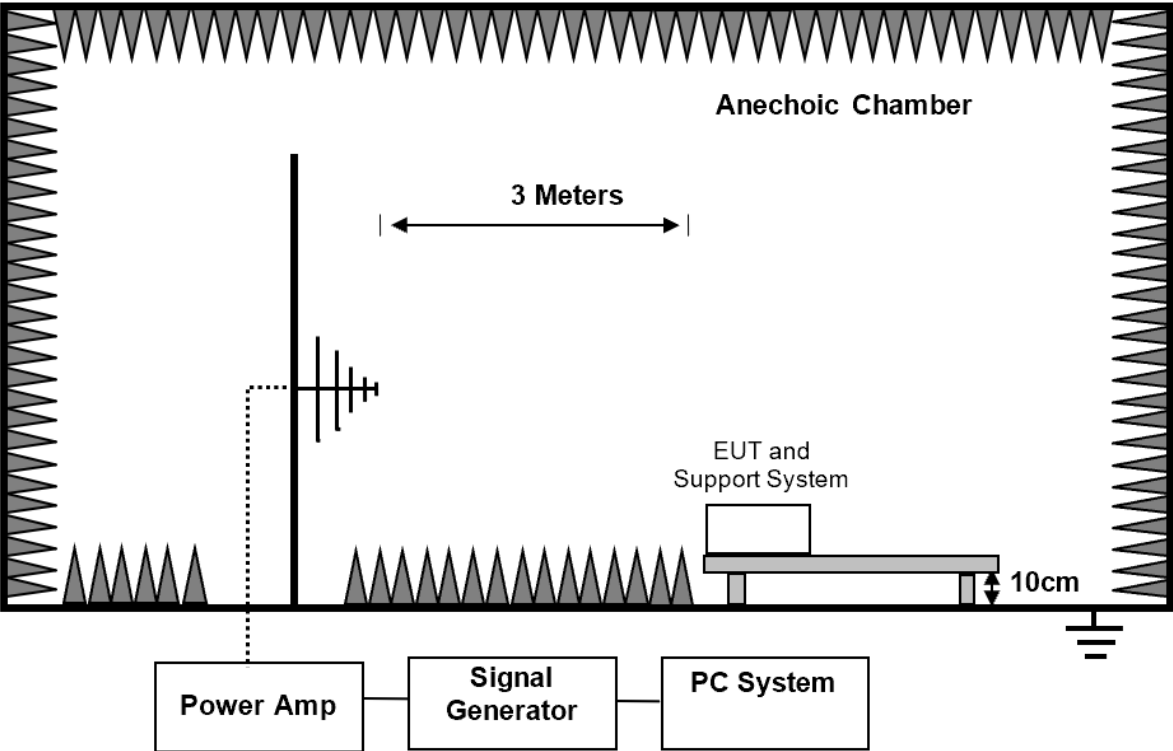

7.3. Test levels and performance criterion

Swept frequency test		Performance Criteria
Frequency (MHz)	80 to 1000	A
Field Strength	3V/m rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of ☒ 1 kHz, ☐ 400 Hz (note 1)	
Step Size	1% increments	
Dwell time	≤5 Sec.	
Spot frequency test		Performance Criteria
Frequency (MHz)	1800, 2600, 3500, 5000	A
Field Strength	3V/m rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of ☒ 1 kHz, ☐ 400 Hz (note 1)	
Dwell time	≤5 Sec.	
Note 1: The 1 kHz modulation may be replaced by a different audio modulation frequency more appropriate for a given EUT if, for example, 1 kHz is not within the operating audio range of the EUT.		
Performance criteria A description for devices with the audio output function: The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.		
For equipment with audio output function:		
☐ The acoustic measurement method was selected according to clause G6.4.1 of EN 55035.		
☐ The electrical measurement method was selected according to clause G6.4.2 of EN 55035.		

Performance criteria A for devices with the telephony function.

Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
		dB(SPL)	Digital dBm0	Analogue dBm0
80 to 1000	-0 dB	75	-30	-30

Note: At the step in the frequency range, the lower limit shall be applied.

The interference ratio (electrical or acoustic) shall meet the limits in column 2; or,
The acoustic level of the demodulated audio shall be less than the limits in column 3; or,
The digitally coded level of demodulated audio shall be less than limits in column 4; or,
The analogue level of the demodulated audio shall be less than the limits in column 5.

Performance criteria A description for other devices: During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended.

7.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

7.5. Test procedure

The field sensor is placed on the EUT table (Ground clearance height reference "block diagram of test setup") which is 3 meters away from the transmitting antenna. Through the signal generator, power amplifier and transmitting antenna to produce a uniformity field strength around the EUT table from frequency range specified and records the signal generator's output level at the same time for whole measured frequency range. Then, put EUT and its simulators on the EUT turn table and keep them 3 meters away from the transmitting antenna which is mounted on an antenna tower and fixes at 1 meter height above the ground. Using the recorded signal generator's output level to measure the EUT from frequency range specified and both horizontal & vertical polarization of antenna must be set and measured. Each of the four sides of EUT must be faced this transmitting antenna and measures individually.


7.6. Test result

Test Site: 4# 1m Chamber	Test Date: 2025/11/08--2025/11/08
Condition: 22°C,45%RH	Test Engineer: Hans Xu
Memo: /	

EUT Name: BLUETOOTH HEADSET				EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007				Test Mode: External charging mode		
Power supply: AC 230V/50Hz				Memo:/		
Steps: 1%, Dwell time 1s, 1kHz 80% AM modulation						
Test frequency	Level	EUT Position	Antenna Polarization	Required	Observation	Result
80MHz to 1000MHz	3V/m	Front	H	A	A	Pass
			V	A	A	Pass
		Left	H	A	A	Pass
			V	A	A	Pass
		Rear	H	A	A	Pass
			V	A	A	Pass
		Right	H	A	A	Pass
			V	A	A	Pass
1800MHz 2600MHz 3500MHz 5000MHz	3V/m	Front	H	A	A	Pass
			V	A	A	Pass
		Left	H	A	A	Pass
			V	A	A	Pass
		Rear	H	A	A	Pass
			V	A	A	Pass
		Right	H	A	A	Pass
			V	A	A	Pass
Observation Description:						
A: Normal performance within limits specified by the manufacturer requestor or purchaser.						

EUT Name: BLUETOOTH HEADSET				EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007				Test Mode: Internal charging mode		
Power supply: Battery				Memo:/		
Steps: 1%, Dwell time 1s, 1kHz 80% AM modulation						
Test frequency	Level	EUT Position	Antenna Polarization	Required	Observation	Result
80MHz to 1000MHz	3V/m	Front	H	A	A	Pass
			V	A	A	Pass
		Left	H	A	A	Pass
			V	A	A	Pass
		Rear	H	A	A	Pass
			V	A	A	Pass
		Right	H	A	A	Pass
			V	A	A	Pass
1800MHz 2600MHz 3500MHz 5000MHz	3V/m	Front	H	A	A	Pass
			V	A	A	Pass
		Left	H	A	A	Pass
			V	A	A	Pass
		Rear	H	A	A	Pass
			V	A	A	Pass
		Right	H	A	A	Pass
			V	A	A	Pass
Observation Description:						
A: Normal performance within limits specified by the manufacturer requestor or purchaser.						

7.7. Test photo

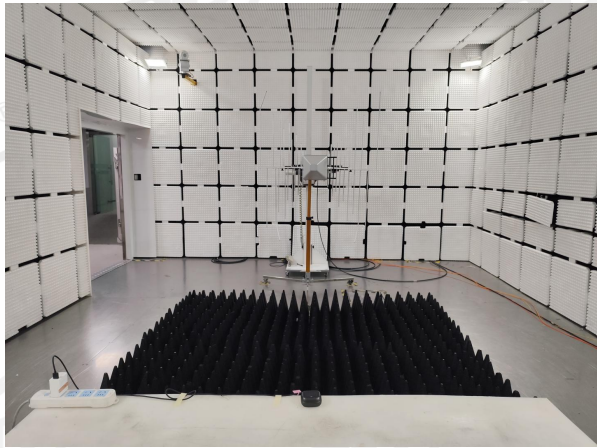	/
	/


8. Electrical Fast Transients(EFT) Test

8.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
EFT Generator	EMC Partner	TRA3000F	DDT-ZC00546	2026/03/28
Coupling Clamp EFT	EMC Partner	CN-EFT1000	DDT-ZC00547	2026/03/28

8.2. Block diagram of test setup

For power port (Note: if the DC network power cable may be lengths greater than 3 m, the requirement is applicable).

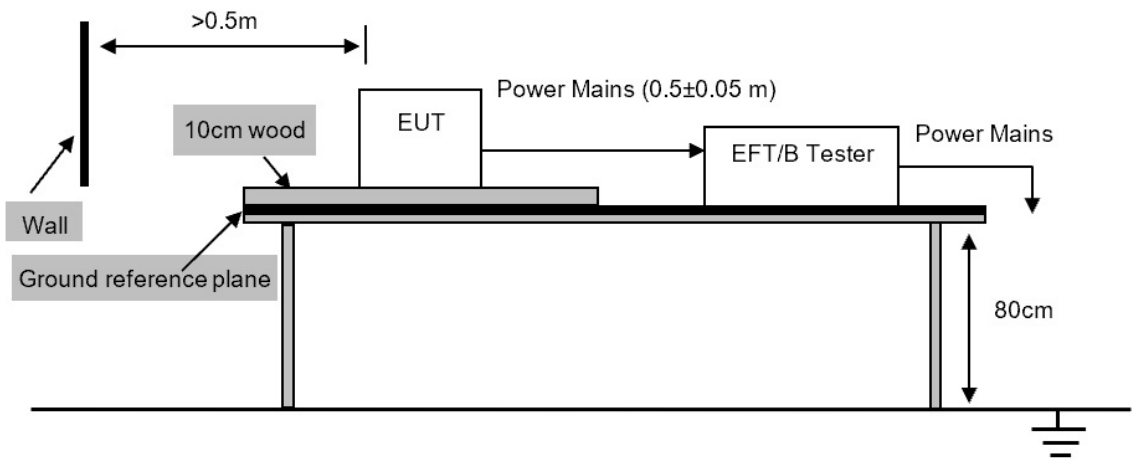

For analogue/digital data ports, if the cables may be longer than 3 m.

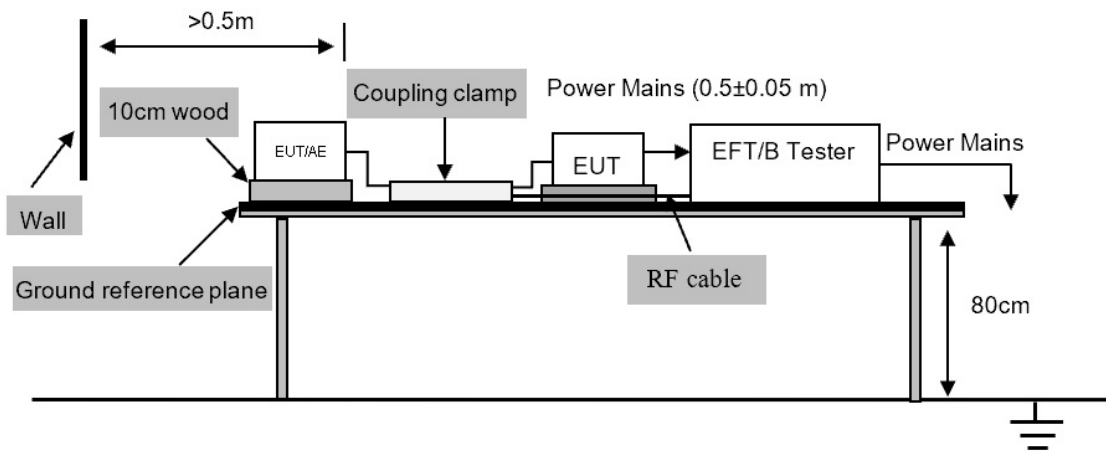

8.3. Test levels and performance criterion

Test Level			Performance Criteria
Test voltage	±1kVfor AC mains port	±0.5kV for dc input or signal port	B
Repetition Frequency	5kHz	5kHz	
Burst Duration	15ms	15ms	
Burst Period	300ms	300ms	
Inject Time(s)	120s	120s	
Inject Method	Direct for AC mains port	Capacitive coupling clamp or CDN	
Inject Line	AC mains	Analogue/digital data ports, and DC network power ports	
Note: This test shall be additionally performed on analogue/digital data ports, and DC network power ports, of radio equipment and associated ancillary equipment, if the cables may be longer than 3 m.			
Performance criteria B description: During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended.			

8.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

8.5. Test procedure

The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support $0.1\text{m} \pm 0.01\text{m}$ thick. The ground reference plane was $1\text{m} \times 1\text{m}$ metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

For DC input and AC power ports:

The EUT was connected to the power mains by using a coupling device that couples the EFT interference signal to AC or DC power lines. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 2mins.

For analogue/digital data ports:

The capacitive coupling clamp was connected to the power by using a coupling device that couples the EFT interference signal to capacitive coupling clamp. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 2mins.

8.6. Test result

Test Site: 7#EMC Shield Room			Test Date: 2025/11/05--2025/11/05			
Condition: 21.5°C,48.3%RH			Test Engineer: Bote Huang			
Memo: /						
EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4			
Sample No.: S25103101-007			Test Mode: External charging mode			
Power supply: AC 230V/50Hz			Memo:/			
Test Burst parameters: Burst Period 300ms, Durations 15ms, Repetition Frequency 5kHz						
Port/ Coupling	Line	Test Voltage	Test time(s)	Required	Observation	Result
AC Mains/ Direct	L	+1kV	120	B	A	Pass
		-1kV	120	B	A	Pass
	N	+1kV	120	B	A	Pass
		-1kV	120	B	A	Pass
	L-N	+1kV	120	B	A	Pass
		-1kV	120	B	A	Pass
Observation Description:						
A: Normal performance within limits specified by the manufacturer requestor or purchaser.						

8.7. Test photo


	/
	/

9. Surge Test

9.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
SURGE Generator	EMC Partner	TRANSIENT200 0	DDT-ZC00544	2026/03/28

9.2. Block diagram of test setup

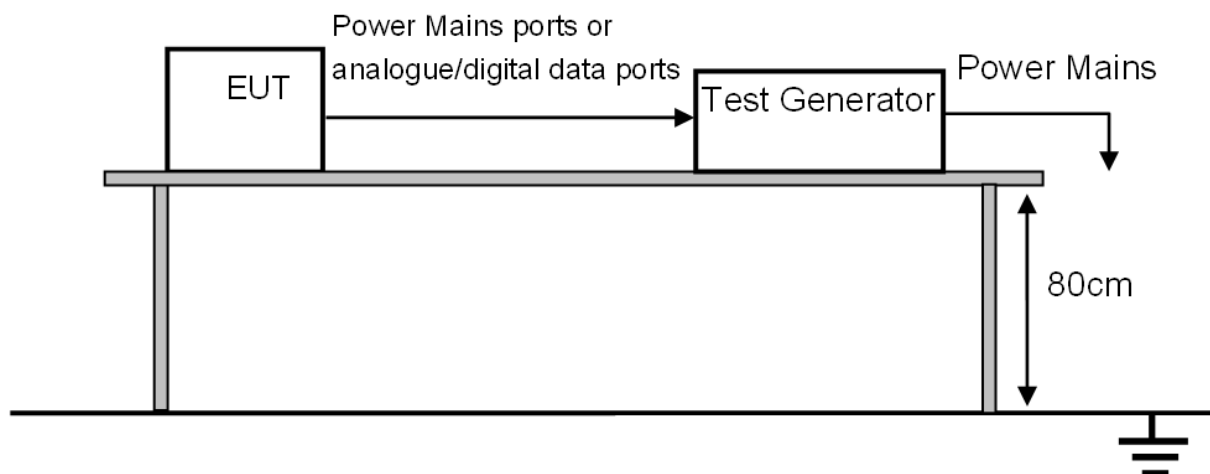

9.3. Test levels and performance criterion

Test level for AC mains ports		Performance Criterion
Line to Line	1 kV 1.2/50(8/20) μ s	B
Line to Ground	2 kV 1.2/50(8/20) μ s	B
Analogue/digital data port, Port type: unshielded symmetrical		Performance Criterion
Line to Ground	1 kV and 4 kV 10/700(5/320) μ s (used with the primary protection)	C
Line to Ground	1 kV 10/700(5/320) μ s (used without the primary protection)	C
Note: Applicable only to ports which, according to the manufacturer's specification, the cable lengths greater than 3m.		
Analogue/digital data port, Port type: coaxial or shielded		Performance Criterion
Shield to ground	0.5 kV 1.2/50(8/20) μ s	B
Note: Applicable only to ports which, according to the manufacturer's specification, the cable lengths greater than 3m.		
DC network power port		Performance Criterion
Line to reference ground	0.5 kV 1.2/50(8/20) μ s	B
Note: Applicable only to ports which, according to the manufacturer's specification, 1. The cable lengths greater than 3m; 2. May connect directly to outdoor cables.		
Performance criteria B description: During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of		

performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended.

Performance criteria B description: Temporary loss of function or degradation of performance, the correction of which requires operator intervention.

9.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

9.5. Test procedure

For line-to- nature coupling mode, provide a 1 kV 1.2/50 us voltage surge (at pen-circuit condition) and 8/20 us current surge to EUT selected points.

For line-to- ground coupling mode, provide a 2 kV 1.2/50 us voltage surge (at pen-circuit condition) and 8/20 us current surge to EUT selected points.

At least 5 positive and 5 negative (polarity) tests with a maximum 1-minute repetition rate are applied during test.
Different phase angles are done individually.

For other surge test, each line of internet port to ground coupling mode, provide a combination wave specified above table.


At least 5 positive and 5 negative (polarity) tests with a maximum 1-minute repetition rate are applied during test.

Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

9.6. Test result

Test Site: 1# Surge Room			Test Date: 2025/11/05--2025/11/05		
Condition: 24°C,55%RH			Test Engineer: Wu Xincheng		
Memo: /					
EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007			Test Mode: External charging mode		
Power supply: AC 230V/50Hz			Memo:/		
Test wave parameters: Wave Type: 1.2/50us-8/20us; The positive pulse is applied 5 times at 90° and the negative pulse 5 times at 270°; Pulse Interval: 60s					
Line/Port	Internal impedance	Test Voltage	Required	Observation	Result
L-N	2Ω	+0.5kV	B	A	Pass
	2Ω	-0.5kV	B	A	Pass
L-N	2Ω	+1kV	B	A	Pass
	2Ω	-1kV	B	A	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser.					

9.7. Test photo

	/
	/


10. Continuous Conducted Disturbances Test

10.1. Test equipment


Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
Conducted Immunity Tester	FRANKONIA	CIT-10	DDT-ZC00551	2026/03/28
CDN	SCHWARZBEC K	CDN M2/M3PE 16A	DDT-ZC01558	2026/07/06
Attenuation	BIRD	DAM75W (6dB)	DDT-ZC00555	2026/07/06
Test Software	FRANKONIA	IEC/EN61000-4- 6	DDT-ZC00564	/

10.2. Block diagram of test setup


For power port (Note: if the DC network power cable may be lengths greater than 3 m, the requirement is applicable).

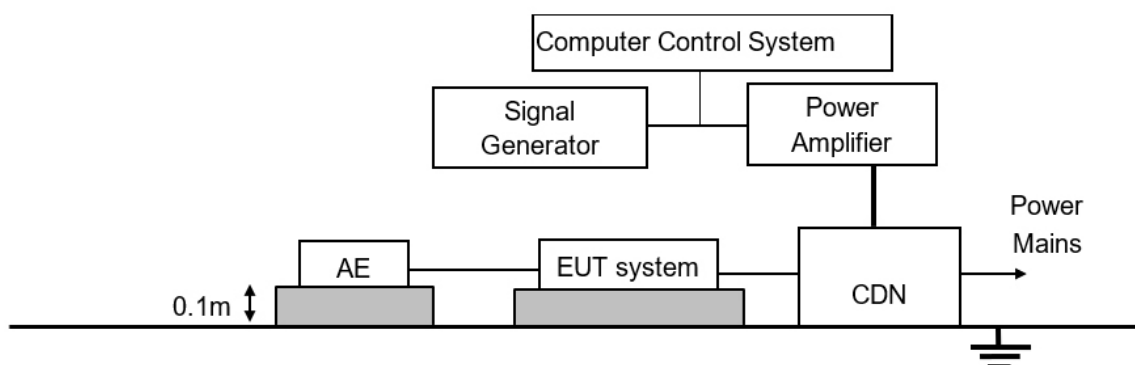


For signal/wired network/control ports, if the cables may be longer than 3 m.

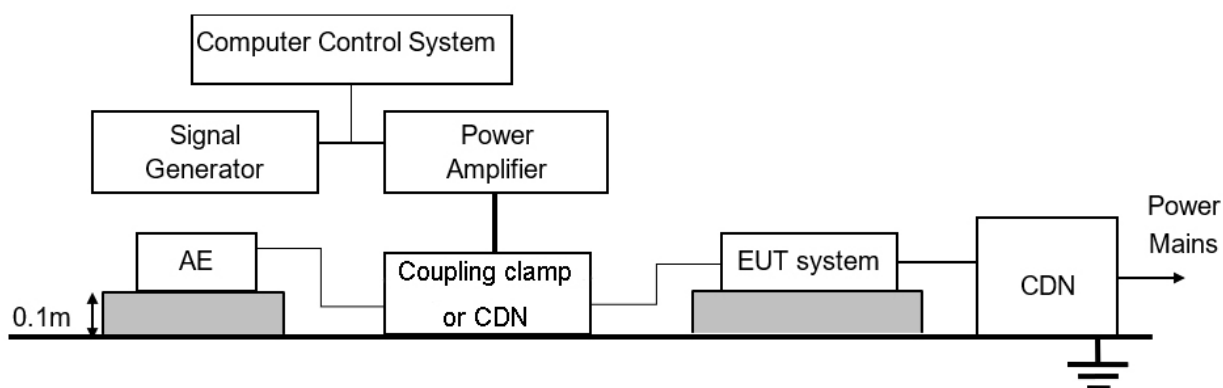


For audio output function (electrical measurement, direct connection to EUT)



For audio output function (acoustic measurement)



For audio output function (on-ear acoustic measurement)

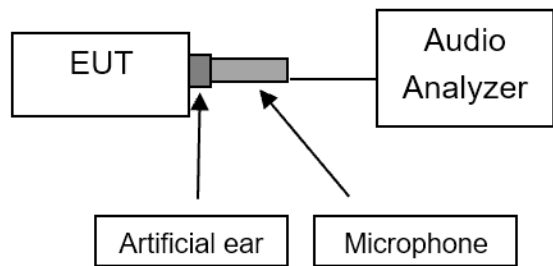

10.3. Test levels and performance criterion

Test Level		Performance Criteria
Frequency and Field Strength	0.15 MHz to 10 MHz, 3V rms voltage level of the unmodulated signal	A
	10 MHz to 30 MHz, 3V to 1V rms voltage level of the unmodulated signal	
	30 MHz to 80 MHz, 1V rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of ☒ 1 kHz / ☐ 400 Hz (note 1)	
Step Size	1% increments	
Dwell time	≤5 Sec.	
<p>Note 1: The 1 kHz modulation may be replaced by a different audio modulation frequency more appropriate for a given EUT if, for example, 1 kHz is not within the operating audio range of the EUT.</p> <p>Note 2: This test shall be additionally performed on analogue/digital data ports, DC network power ports of equipment, if the cables may be longer than 3 m.</p> <p>Performance criteria A description for devices with the audio output function: The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.</p>		

- ☐ The acoustic measurement method was selected according to clause G6.4.1 of EN 55035.
☐ The electrical measurement method was selected according to clause G6.4.2 of EN 55035.
Performance criteria A for devices with the telephony function.

Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
		dB(SPL)	Digital dBm0	Analogue dBm0
0.15 to 30	-20 dB	55	-50	-50
30 to 80	-10 dB	65	-40	-40

Note: At the step in the frequency range, the lower limit shall be applied.
The interference ratio (electrical or acoustic) shall meet the limits in column 2; or,
The acoustic level of the demodulated audio shall be less than the limits in column 3; or,
The digitally coded level of demodulated audio shall be less than limits in column 4; or,
The analogue level of the demodulated audio shall be less than the limits in column 5.
Performance criteria A description for other devices: During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended.

10.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

10.5. Test procedure

The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

The disturbance signal described below is injected to EUT through CDN.

The EUT operates within its operational mode(s) under intended climatic conditions after power on.

Use the frequency range specified by the standard, interference signal level, and interference signal for testing.


The step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

10.6. Test result

Test Site: 6#EMC Shield Room			Test Date: 2025/11/05--2025/11/05		
Condition: 24°C,50%RH			Test Engineer: Wu Xincheng		
Memo: /					
EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007			Test Mode: External charging mode		
Power supply: AC 230V/50Hz			Memo:/		
Test steps: 1%, Dwell time 1s, 1kHz 80% AM modulation					
② Test frequency	Injected Position	Strength	Required	Observation	Result
0.15MHz to 10MHz	AC Port	3V	A	A	Pass
10MHz to 30MHz	AC Port	3V to 1V	A	A	Pass
30MHz to 80MHz	AC Port	1V	A	A	Pass
Observation Description:					
A: Normal performance within limits specified by the manufacturer requestor or purchaser.					

10.7. Test photo

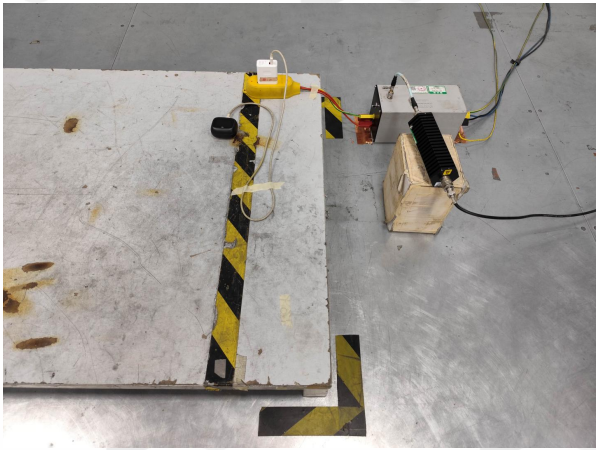
	/
	/

11. Power-Frequency Magnetic Fields

11.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
DIPS TESTER	EMC Partner	EXT-TRA3000D	DDT-ZC00548	2026/03/28
Magnetic Field Tester	EMC Partner	MF1000-1	DDT-ZC00550	2026/07/07

11.2. Block diagram of test setup

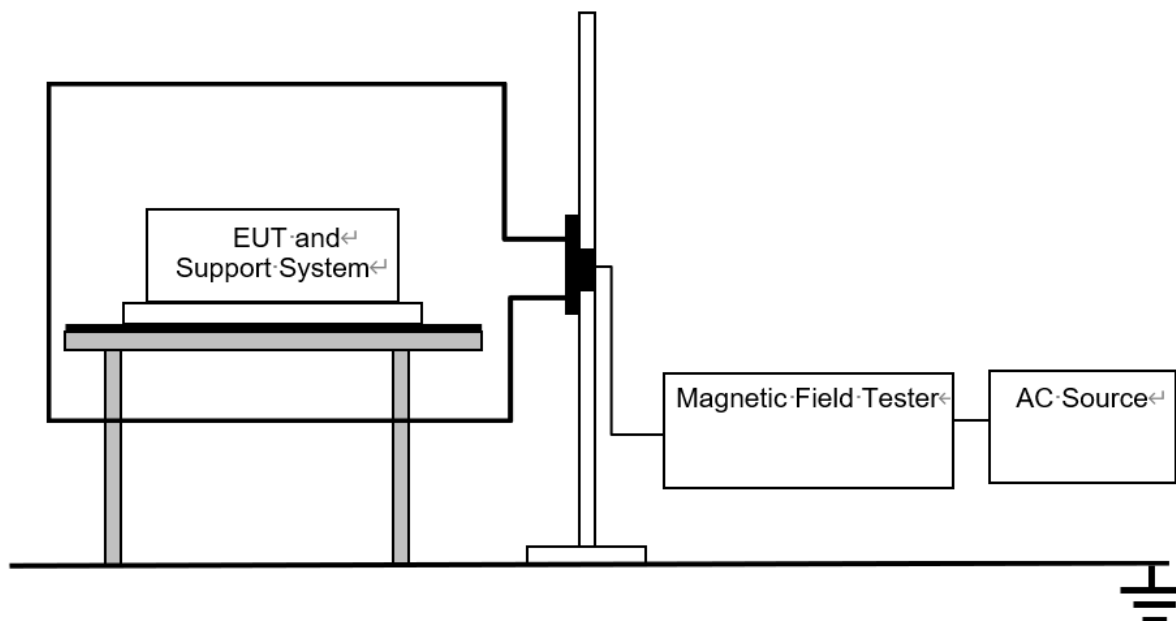

11.3. Test levels and performance criterion

Level	Magnetic Field Strength (A/m)	Performance Criterion
1	1	A

Performance criteria A description: During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended.

11.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

11.5. Test procedure

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m). Then induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.


11.6. Test result

Test Site: 7#EMC Shield Room	Test Date: 2025/11/05--2025/11/05
Condition: /	Test Engineer: Bote Huang
Memo: /	

EUT Name: BLUETOOTH HEADSET		EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007		Test Mode: External charging mode		
Power supply: AC 230V/50Hz		Memo: /		
Test parameters	Coil Orientation	Required	Observation	Result
1A/m 50Hz Duration 300s	X	A	A	Pass
	Y	A	A	Pass
	Z	A	A	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser.				

EUT Name: BLUETOOTH HEADSET		EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007		Test Mode: Internal charging mode		
Power supply: Battery		Memo: /		
Test parameters	Coil Orientation	Required	Observation	Result
1A/m 50Hz Duration 300s	X	A	A	Pass
	Y	A	A	Pass
	Z	A	A	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser.				

11.7. Test photo

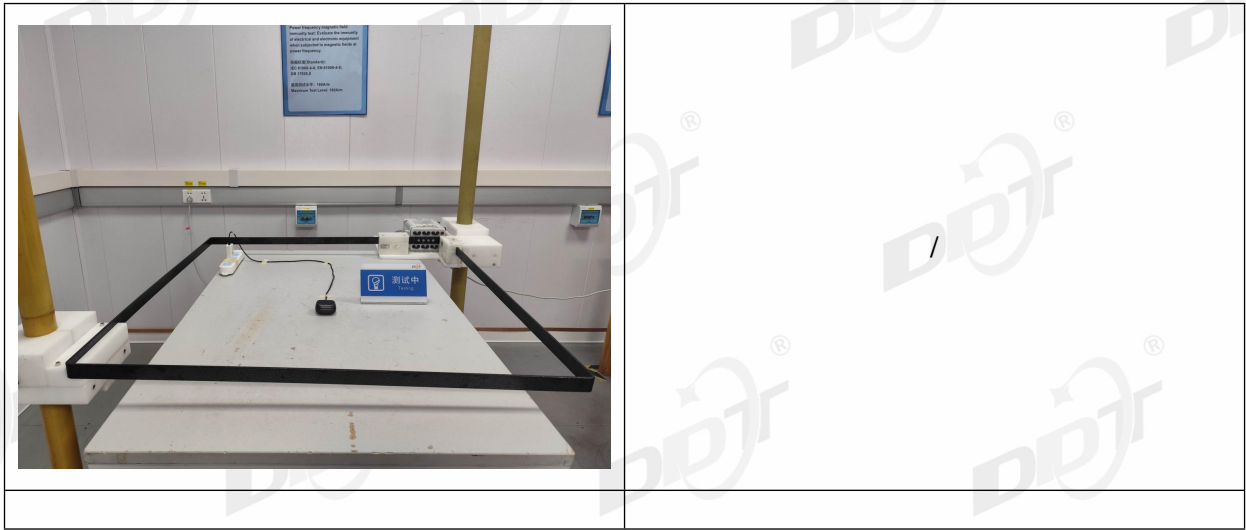


12. Voltage Dips and Interruptions Test

12.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal. Due to
EFT Generator	EMC Partner	TRA3000F	DDT-ZC00546	2026/03/28
DIPS TESTER	EMC Partner	EXT-TRA3000D	DDT-ZC00548	2026/03/28

12.2. Block diagram of test setup

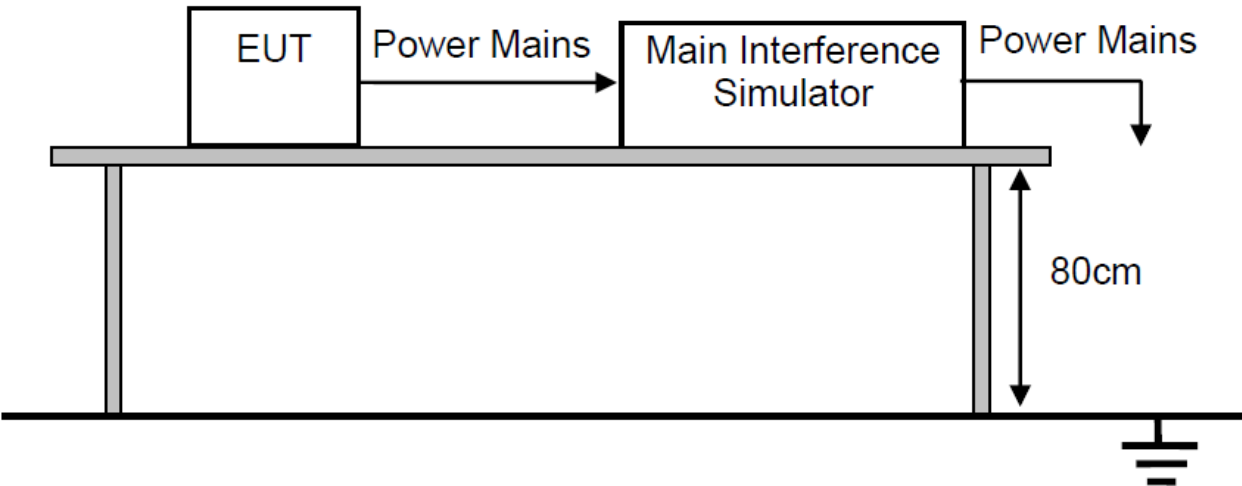

12.3. Test levels and performance criterion

Test Level%UT	Duration(in period)	PerformanceCriterion
<5	0.5	B
70	25 for 50Hz/30 for 60Hz	C
<5	250 for 50Hz/300 for 60Hz	C

Performance criteria B description: During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended.

Performance criteria C description: During and after testing, a temporary loss of function is allowed, provided the function is self recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer’s instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei fast charging 66W-1#/2# site	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX
USB cable	N/A	N/A	Length: 1m	N/A

12.5. Test procedure

The EUT and test generator were setup as shown. The interruptions are introduced at selected phase angles with specified duration. Record any degradation of performance.

12.6. Test result

Test Site: 7#EMC Shield Room	Test Date: 2025/11/05--2025/11/05
Condition: 21.8°C,56.7%RH	Test Engineer: Bote Huang
Memo: /	

EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007			Test Mode: External charging mode		
Power supply: AC 240V/50Hz			Memo:/		
Voltage Dips & Short Interruptions %U _T	Duration (in period)	Phase Angle	Required	Observation	Result
0	0.5P	0° to 360°	B	A	Pass
70	25P	0° to 360°	C	A	Pass
0	250P	0° to 360°	C	B	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser. B: During the test, the prototype's charging indicator light goes out, and after the test is completed, it can return to normal operation on its own.					

EUT Name: BLUETOOTH HEADSET			EUT Model: LIVE BEAM 4		
Sample No.: S25103101-007			Test Mode: External charging mode		
Power supply: AC 100V/60Hz			Memo: /		
Voltage Dips & Short Interruptions %U _T	Duration (in period)	Phase Angle	Required	Observation	Result
0	0.5P	0° to 360°	B	A	Pass
70	30P	0° to 360°	C	A	Pass
0	300P	0° to 360°	C	B	Pass
Observation Description: A: Normal performance within limits specified by the manufacturer requestor or purchaser. B: During the test, the prototype's charging indicator light goes out, and after the test is completed, it can return to normal operation on its own.					

12.7. Test photo

	/
	/

13. Sample photos

Please refer to DDT-Q25103101-2E Appendix I.

-----End Report-----